



Quickinfo

GENERAL
track light
with internal LED driver

LED
COB LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME
L80 / 50,000h

OPTICAL
direct illumination
beam angle 18°, 30°, 45°

ELECTRICAL
non DIM

PHYSICAL
aluminium
powder coating

Function


FELLOW M perfectly combines functionality and esthetics. Elegant design with LED driver inside housing

The head rotates through 355° and pivots through 90°.

Optimized passive cooling system ensures low temperature and long lifetime of LED.

Front ring provides good glare control. Adopt of lens guarantees high luminous efficiency and uniform distribution .

High visual comfort.

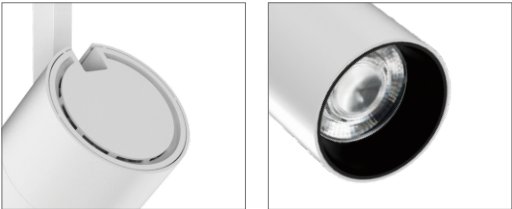

Concise structure with driver inside housing
High quality optical lens ensures precise lighting distribution

Features



Order options

COLOUR TEMPERATURE

2700K
3000K
4000K


COLOUR RENDERING INDEX

CRI 80
CRI 90




FELLOW M

3000K
(Standard)

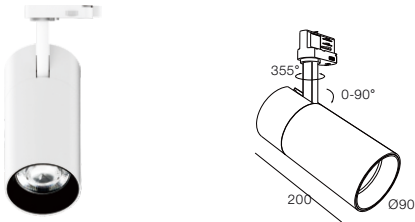

Light distribution for 3000K

28 W 2700lm-2900lm

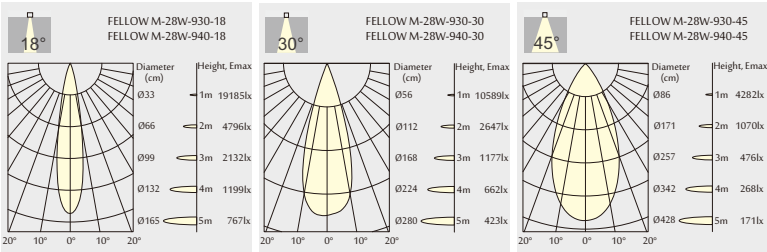

Order Information

FELLOW M-28W 2700 Lm MODELS					(CITIZEN LED)				
Code	LED output	Module output	CD	LED Power	System Power	CRI	CCT	BEAM	
FELLOW M-28W-930-18	3400 lm	2700 lm	19194 cd	25 W	28 W	90	3000K	18°	
FELLOW M-28W-940-18	3600 lm	2900 lm	20012 cd	25 W	28 W	90	4000K	18°	
FELLOW M-28W-930-30	3400 lm	2700 lm	10662 cd	25 W	28 W	90	3000K	30°	
FELLOW M-28W-940-30	3600 lm	2900 lm	11854 cd	25 W	28 W	90	4000K	30°	
FELLOW M-28W-930-45	3400 lm	2700 lm	4285 cd	25 W	28 W	90	3000K	45°	
FELLOW M-28W-940-45	3600 lm	2900 lm	4588 cd	25 W	28 W	90	4000K	45°	