

Using the 70 Square or 100 Square linear profile, create a visually stunning luminaire by adding colour to the interior as well as the exterior of the fitting.




Specifications

LED Module: Tridonic | Osram | Vossloh Schwabe | Samsung
Lumen Maintenance & Life Expectancy: L80 B10 >50,000h
Lumen Output Range: 1100 - 3700lm/m
Profile Dimensions: W68mm x H90mm | **Length:** Min 310mm Max unlimited multiples of 140mm, 280mm and 560mm
Profile Weight: 2kg/m
Protection Rate: IP20 | IP54 on request
CRI: Ra80 | Ra90 on request
Colour Temperature: 3000K | 4000K | 27-57K Tunable White
Colour Stability: 3 Step MacAdam
Distribution: Direct | Direct/Indirect
Diffuser: Ice
Dimming: Non-dim | DALI | 0-10V | Switch-dim
Warranty: 5 Years | Extended on request
Features: Mitered Corners | No visible fixings | Removable gear plates | Socket End Caps to prevent light leakage | Independent test reports


Colour Options



Mounting Options

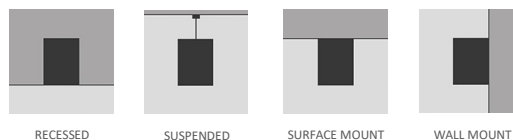

Using the 70 Square or 100 Square linear profile, create a visually stunning luminaire by adding colour to the interior as well as the exterior of the fitting.

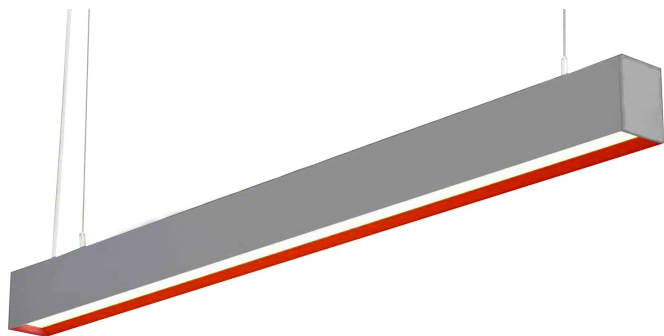

Specifications

LED Module: Tridonic | Osram | Vossloh Schwabe | Samsung
Lumen Maintenance & Life Expectancy: L80 B10 >50,000h
Lumen Output Range: 1100 - 3700lm/m
Profile Dimensions: W94mm x H105mm | **Length:** Min 310mm Max unlimited multiples of 140mm, 280mm and 560mm
Profile Weight: 2kg/m
Protection Rate: IP20 | IP54 on request
CRI: Ra80 | Ra90 on request
Colour Temperature: 3000K | 4000K | 27-57K Tunable White
Colour Stability: 3 Step MacAdam
Distribution: Direct | Direct/Indirect
Diffuser: Ice
Dimming: Non-dim | DALI | 0-10V | Switch-dim
Warranty: 5 Years | Extended on request
Features: Mitered Corners | No visible fixings | Removable gear plates | Socket End Caps to prevent light leakage | Independent test reports

Colour Options



Mounting Options

