


Lusow Mirror Installation Instructions

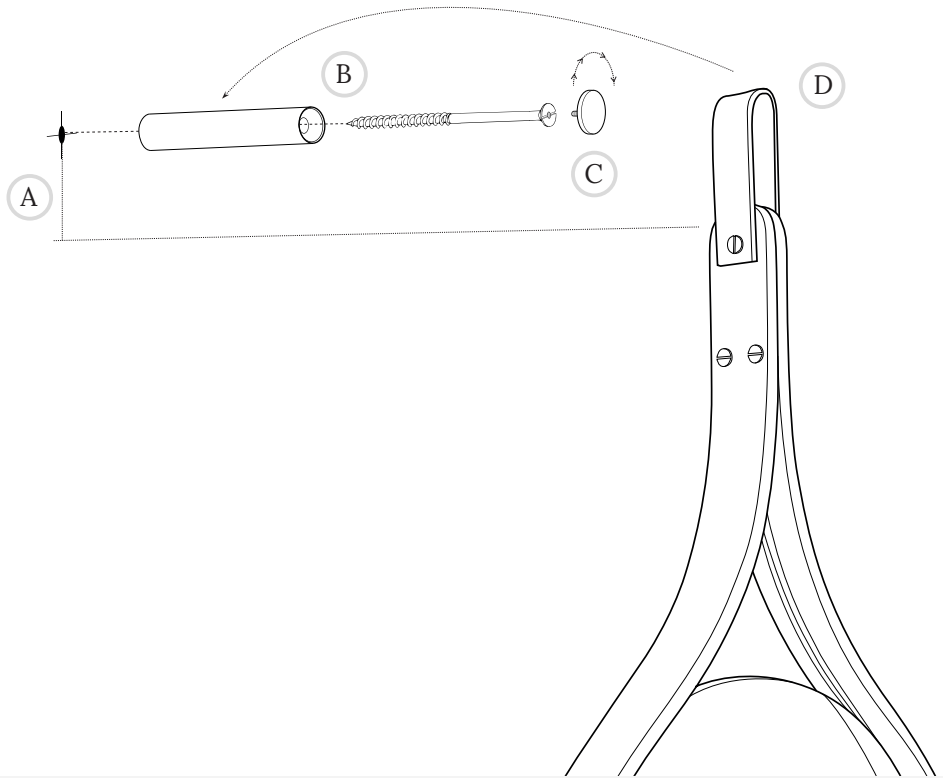

1. Identify if there are any hidden pipes or electrical cables in the wall to avoid causing damage or risk of electrical shock during installation. Make a mark on the wall about **5cm** (allowing for the leather strap) higher than where you require the top of the wooden steam bent frame to hang from (A). **The wall must be capable of supporting the weight of the Lusow Mirror (2.5kg)**. Determine the fixing method appropriate to the wall structure (e.g. plaster board plugs for a 4mm screw). If attaching to a wooden surface, no additional fixings are required. We would always recommend finding joists if possible.
2. Push the cap head screw through the wooden dowel peg so the screw head sits flush into the countersunk end of the peg (B). Using a flat/slotted head screwdriver, carefully screw the wooden dowel peg to the wall ensuring it is not over-tightened and can rotate around the screw. **Over-tightening the screw will cause the wooden dowel peg to split**. Screw the brushed brass cap onto the cap head screw (C).
3. Carefully hang the mirror over the wooden dowel peg using the leather strap (D).

*** The Lusow Mirror is intended for indoor use only.***

For more information on the installation of your product: contact@tomraffield.com +44 (0)1326 722725