

<b>GRWM01</b> <b>120V</b>	Cat. #		<b>SELSER™</b> LIGHTING PRODUCTS
	Job	Type	
			Approvals



### MOUNTING OPTIONS



#### Housing

Better waterproofing, and suitable for both indoor and outdoor application.



#### Lens

Polycarbonate optical lens with heat resisting.



#### Mounting

Supports direct wall mounting and J-box mounting, with 1/2 inch entry at the bottom.




#### Photocell

Optional allows for security and energy saving.

### DIMENSIONS

unit: mm/inch

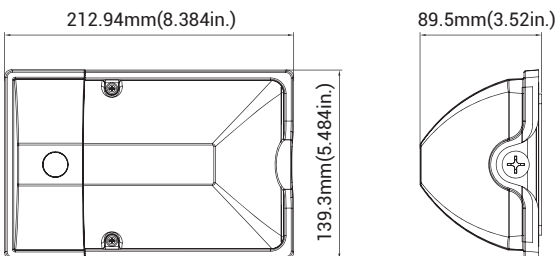

Weight: 1.87lb



© 2019 Selsler Lighting Products All rights reserved.


Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selsler Lighting Products reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

**SELSER™**  
LIGHTING PRODUCTS


Selsler Lighting Products  
Po Box 45160  
Baton Rouge, La. 70895  
Phone # (225) 412-0025

## PHOTOMETRICS

15W



17W



### PERFORMANCE DATA

PERFORMANCE DATA			4000K (70CRI)		5000K (70CRI)	
SYSTEM WATTS	VOLTAGE	CRI	LUMENS (4000K)	LPW (4000K)	LUMENS (5000K)	LPW (5000K)
15W	120VAC	80	1500lm	100 lm/W	1600lm	107 lm/W
17W	120VAC	70	1800lm	106 lm/W	1820lm	107 lm/W

### ELECTRICAL DATA


NUMBER OF DRIVERS	DRIVER CURRENT (mA)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	15	120	0.13
1	17	120	0.14

Applications: Perfect for security, entry ways, stairways, storage and perimeter areas, as well as residential exteriors.

### FEATURES

- » Sealed die-casting profile for outdoor applications
- » Consume only 15W and 17 W, perfect replacement for the standard 120 Watts metal halide and high pressure sodium fixtures, light up constantly for over 50,000 hours
- » 120VAC photocell included for great energy-saving
- » Die-casting housing for an excellent cooling system and anti-corrosion, UV-stabilized polycarbonate frosted lens for anti-glare design
- » Supports direct wall mounting and J-box mounting, with 1/2 inch entry at the bottom
- » Operating temperature is -40°C to 50°C (-40°F to 122°F)
- » UL/cUL wet location and DLC qualified

### ORDER MATRIX



FIXTURE TYPE	POWER CONSUMPTION	VOLTAGE	CCT	FINISH	PHOTOCELL (Option)	LENS
GRWM01, 120V	15 15W 17 17W	12V 120V	40K 4000K 50K 5000K	D Dark Bronze B Black W White	P1 120V Photocell Blank Without Photocell	C Clear Lens F Frosted Lens



© 2019 Selser Lighting Products All rights reserved.

Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selser Lighting Products reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

**SELSER™**  
LIGHTING PRODUCTS

Selser Lighting Products  
Po Box 45160  
Baton Rouge, La. 70895  
Phone # (225) 412-0025