

<b>GRDD01</b>	Cat. #		<b>SELSER™</b> LIGHTING PRODUCTS
	Job	Type	
			Approvals



5 Year  
Warranty

### Mounting Options



#### Photocell

Optional photocell allows for security and energy saving.



#### Housing


One piece die cast housing better waterproofing, suitable for both indoor and outdoor application.



#### Mounting

Applicable to a variety of diameter installation, 1 5/8 to 2 3/8 compatible, suitable for wall and cylinder installation.

### Mounting Dimensions

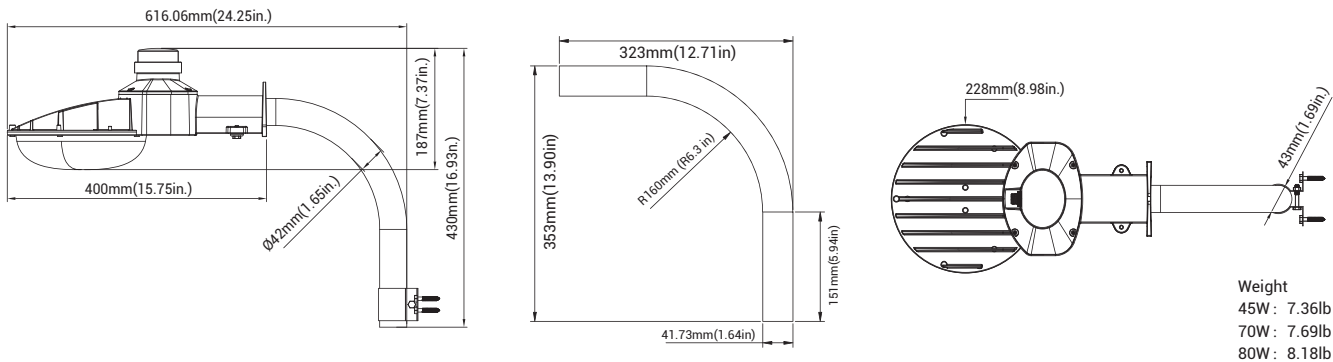


© 2019 Selser Lighting Products All rights reserved.

Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selser Lighting Products reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

**SELSER™**  
LIGHTING PRODUCTS

Selser Lighting Products  
Po Box 45160  
Baton Rouge, La. 70895  
Phone # (225) 412-0025

**PHOTOMETRICS**

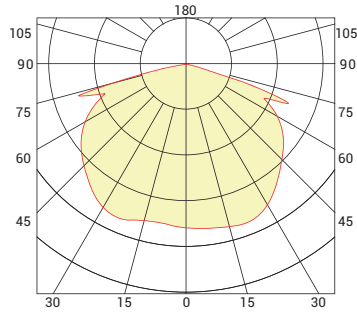

PERFORMANCE DATA		4000K (70CRI)		5000K (70CRI)	
SYSTEM WATTS	VOLTAGE	LUMENS	LPW	LUMENS	LPW
45W	120-277VAC	4930lm	110 lm/W	4930lm	110 lm/W
70W	120-277VAC	6800lm	97 lm/W	7000lm	100 lm/W
80W	120-277VAC	10000lm	125 lm/W	10000lm	125 lm/W

**ELECTRICAL DATA**

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	1100	45	120	0.38
		45	208	0.22
		45	240	0.19
		45	277	0.16
1	1630	70	120	0.58
		70	208	0.34
		70	240	0.29
		70	277	0.25
1	2120	80	120	0.67
		80	208	0.38
		80	240	0.33
		80	277	0.29

**ORDER MATRIX**

Fixture Type	Wattage	Voltage	CCT	Finish	Photometry
GRDD01	45 45W 70 70W 80 80W	27V 120-277V	40K 4000K 50K 5000K	DB Dark Bronze B Black W White SG Silver Gray	PO 120-277V Photocell Blank Without Photocell



© 2019 Selser Lighting Products All rights reserved.  
 Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selser Lighting Products reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

**SELSER**  
 LIGHTING PRODUCTS

Selser Lighting Products  
 Po Box 45160  
 Baton Rouge, La. 70895  
 Phone # (225) 412-0025

## FEATURES

- » Suitable for WET location/Outdoor
- » Voltage is 120-277V and replacing 100W MH and 175W MH.
- » Outstanding thermal solution allows for usage in commercial application
- » Available in durable polyester dark bronze or silver grey powder coat
- » Built-in UL class 2 driver, optional for photocell.
- » Optional steel powder coated arm.
- » Operating temperature is -40°C to 45°C (-40°F to 113°F).
- » UL/cUL listed and DLC qualified.

## DLC MODEL NO.

SYSTEM WATTS	VOLTAGE	CCT	DLC NO.	DLC Classification
45W	120-277V	4000K	ST45W27V40KAYY	Standard
		5000K	ST45W27V50KAYY	Standard
70W	120-277V	4000K	ST70W27V40KAYY	Standard
		5000K	ST70W27V50KAYY	Standard



© 2019 Selser Lighting Products All rights reserved.  
Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selser Lighting Products reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

**SELSE**<sup>™</sup>  
LIGHTING PRODUCTS

Selser Lighting Products  
Po Box 45160  
Baton Rouge, La. 70895  
Phone # (225) 412-0025