

GRFD08	Cat. #		SELSER™ LIGHTING PRODUCTS
	Job	Type	
			Approvals

15W & 27W

45W & 60W

70W & 100W

135W & 200W



MOUNTING OPTIONS



1/2" Knuckle Mount (15W/27W/45W/60W)



Trunnion Mount (15W/27W/45W/60W)




Yoke Mount (70W/100W/135W/200W)




Slipfitter Mount (70W/100W/135W/200W)

MOUNTING DIMENSIONS


15W&27W(Knuckle Mount)

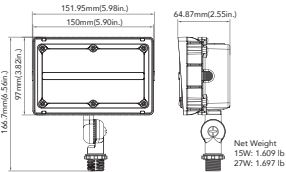


15W&27W(Trunnion Mount)

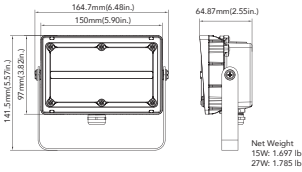


45W&60W(Knuckle Mount)

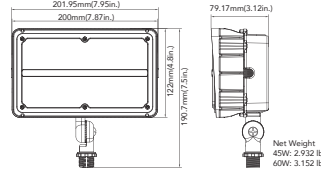


45W&60W(Trunnion Mount)

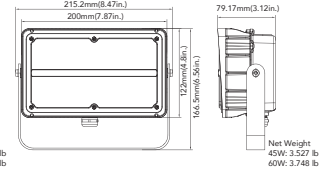


70W&100W(Slipfitter Mount)

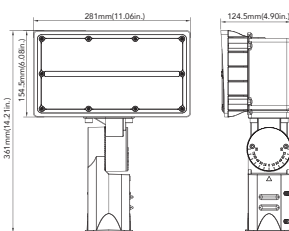


70W&100W(Yoke Mount)

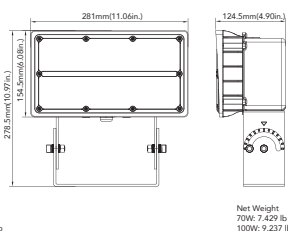

135W&200W(Slipfitter Mount)

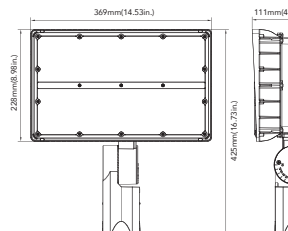

135W&200W(Yoke Mount)

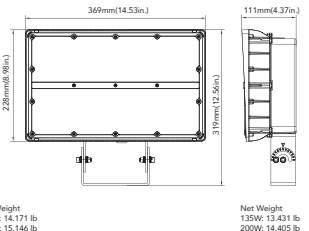


© 2019 Selser Lighting Products All rights reserved.

Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selser Lighting Products reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

SELSER™
LIGHTING PRODUCTS

Selser Lighting Products
Po Box 45160
Baton Rouge, La. 70895
Phone # (225) 412-0025

PHOTOMETRICS

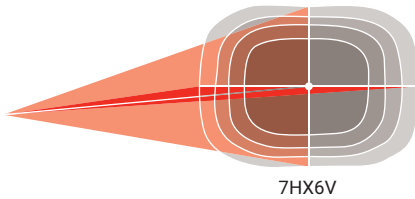

ACCESSORIES



Photocell

No. PC-JL-120-277V

USE: Photocell is field installed or pre-installed in factory by requesting

PERFORMANCE DATA

SYSTEM WATTS	VOLTAGE	DIST. TYPE	CRI	LUMENS (3000K)	LPW (3000K)	LUMENS (4000K)	LPW (4000K)	LUMENS (5000K)	LPW (5000K)
15W	120-277V	7Hx6V	70	1950lm	130 lm/W	2000lm	133 lm/W	2000lm	133 lm/W
27W	120-277V	7Hx6V	70	3500lm	130 lm/W	3600lm	133 lm/W	3600lm	133 lm/W
45W	120-277V	7Hx6V	70	5550lm	123 lm/W	5650lm	126 lm/W	5650lm	126 lm/W
60W	120-277V	7Hx6V	70	7250lm	121 lm/W	7450lm	124 lm/W	7450lm	124 lm/W
60W	347-480V	7Hx6V	70	7500lm	125 lm/W	7600lm	127 lm/W	7600lm	127 lm/W
70W	120-277V	7Hx6V	70	8700lm	124 lm/W	8900lm	127 lm/W	8900lm	127 lm/W
70W	347-480V	7Hx6V	70	9100lm	130 lm/W	9300lm	133 lm/W	9300lm	133 lm/W
90W	347-480V	7Hx6V	70	12000lm	133 lm/W	12400lm	138 lm/W	12400lm	138 lm/W
100W	120-277V	7Hx6V	70	13100lm	131 lm/W	13300lm	133 lm/W	13300lm	133 lm/W
135W	120-277V/347-480V	7Hx6V	70	17100lm	127 lm/W	17500lm	130 lm/W	17800lm	132 lm/W
200W	120-277V/347-480V	7Hx6V	70	24600lm	123 lm/W	25600lm	128 lm/W	26000lm	130 lm/W

ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	250	15	120	0.13
		15	208	0.07
		15	240	0.06
		15	277	0.05
1	430	27	120	0.23
		27	208	0.13
		27	240	0.11
		27	277	0.10
1	770	45	120	0.38
		45	208	0.22
		45	240	0.19
		45	277	0.16
1	920	60	120	0.50
		60	208	0.29
		60	240	0.25
		60	277	0.22
1	1600	60	347	0.17
		60	480	0.13
1	1750	70	120	0.58
		70	208	0.34
		70	240	0.29
1	1850	70	277	0.25
		70	347	0.20
1	1850	70	480	0.15
		100	120	0.83
1	2600	100	208	0.48
		100	240	0.42
		100	277	0.36
		100	347	0.26
2	2400	90	480	0.19
		135	120	1.13
2	3500	135	208	0.65
		135	240	0.56
		135	277	0.49
		135	347	0.39
		135	480	0.28
2	5000	200	120	1.67
		200	208	0.96
		200	240	0.83
		200	277	0.72
		200	347	0.58
		200	480	0.42



© 2019 Selsler Lighting Products All rights reserved.

Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selsler Lighting Products reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

SELSELER
LIGHTING PRODUCTS


Selsler Lighting Products
Po Box 45160
Baton Rouge, La. 70895
Phone # (225) 412-0025

The GRFD08 luminaire is a high performance LED lighting solution designed with optical versatility and a slim, low profile design. Its rugged cast aluminum housing minimizes wind load requirements and features an integral, watertight LED driver compartment and high performance aluminum heat sinks. Markets include parking lots, walkways, campuses, car dealerships, office complexes, and internal roadways.

FEATURES

- » Housing, electrical compartment and fitter are all made from die case aluminum that is pre-treated and powder-coated to meet the most rugged industry standards
- » Door frame features an integral accessory channel for the mounting of optional light control accessories
- » Vented housing isolates LED module from driver, maximizing product life and performance
- » Doorframe seals to housing with a continuous extruded silicone gasket
- » Suitable for wet locations
- » Optics (NEMA Type): 7H*6V
- » Scalable Lumen Packages from 1,950 to 26,000 Lumens
- » Provides the best combination of vertical and horizontal illumination while reducing light behind the poles
- » High performance acrylic optic securely attached to internal heat sink for maximum thermal dissipation
- » Universal 120-277 VAC or 347-480 VAC input voltage
- » Both drivers have a power factor >90%, THD <20%, and an expected life of 100,000 hours
- » Estimated 100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations
- » Five-year warranty

ORDER MATRIX



FIXTURE TYPE	WATTAGE	VOLTAGE	CCT	DIMMABLE	FINISH	PHOTOCELL (Option)	NEMA	MOUNTING	INTERNAL CODE
GRFD08	15 15W	27V 120-277V	30K 3000K	D 1-10VDIM	DB Dark Bronze	P0 With Photocell	B76 7HX6V	TR Trunion Mount	Blank Alphanumeric
	27 27W	48V 347-480V	40K 4000K	Blank NO DIM	B Black	Blank Without Photocell		KN Knuckle Mount	
	45 45W		50K 5000K		W White			YK Yoke	
	60 60W				SG Silver Gray			SP Slipfitter Mount	
	70 70W								
	90 90W								
	100 100W								
	135 135W								
200 200W									

- Note:**
1. 15W, 27W, 45W, 60W only suitable for non dimming.
 2. 70W with dimming and non dimming options.
 3. 90W, 100W, 135W, 200W only suitable for dimming.
 4. Only 60W, 70W, 90W, 135W, 200W suitable for 347-480V input voltage.



© 2019 Selser Lighting Products All rights reserved.
 Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selser Lighting Products reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.



Selser Lighting Products
 Po Box 45160
 Baton Rouge, La. 70895
 Phone # (225) 412-0025