


GR-LED-HET	Cat. #		SELSER™ LIGHTING PRODUCTS
	Job	Type	
	Approvals		



5 Year
Warranty


MOUNTING OPTIONS

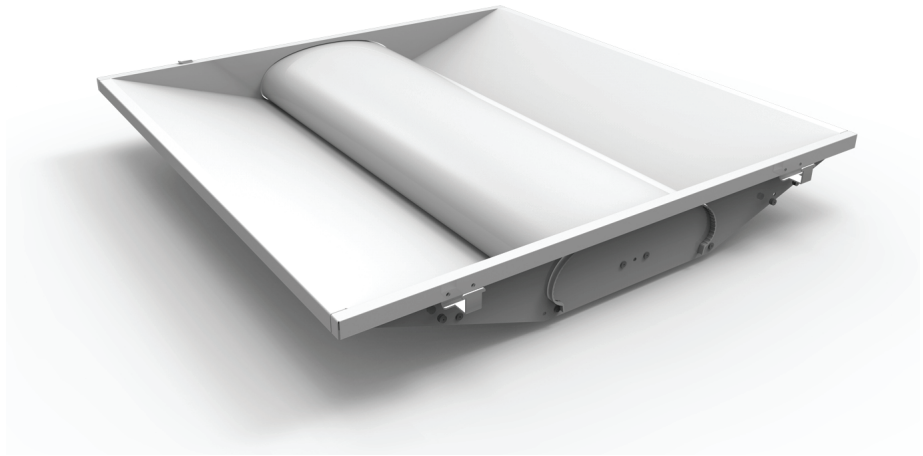


DIMENSIONS

unit: mm/inch

2' x 2'



2' x 4'

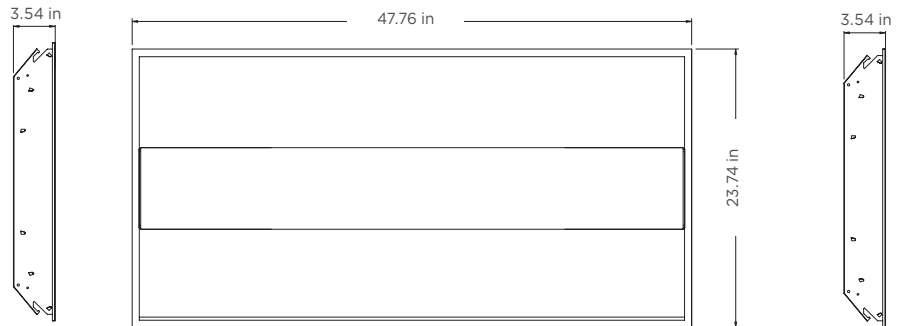

© 2019 Selsler Lighting Products All rights reserved.
Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selsler Lighting Products reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

SELSER™
LIGHTING PRODUCTS

Selsler Lighting Products
Po Box 45160
Baton Rouge, La. 70895
Phone # (225) 412-0025

LED Wattage and Lumen Values

Watts	Lumens	Lumens per watt
20w	2835	140 l/w
30w	4200	140 l/w
40w	5600	140 l/w
50w	7000	140 l/w

Designed to replace recessed fluorescent troffers, Mills LIGHTING troffers adopt state-of-the-art optical and LED lighting technology for use in classroom, workplace, hospital applications. Mills recessed troffers provide light uniformity, eliminating shadows. High efficiency 140 lumens per watt. Cost effective, Easy to install. Excellent heat dissipation. 50,000 hours. UL listed for damp locations. DLC 4.2 Qualified. 0-10v Dimming Technology.

FEATURES

The perfect LED replacement solution for recessed fluorescent troffers.

- » Perfect light uniformity
- » No shadow, no dark area
- » SMD 2835 up to 140lm/W
- » Cost effective, easy to install
- » CRI≥80 PF>0.9 THD<20%
- » High quality PC cover, light transmittance up to 90%, Anti-UV
- » Integrated design, superior cold-roll steel plate, excellent heat dissipation and strength support
- » Expected service life is over 100,000 hrs and 10 year limited warranty
- » UL Wet location listed and DLC qualified

ORDER MATRIX

FIXTURE TYPE	PANEL SIZE	WATTAGE	VOLTAGE	CCT	SENSOR (Option)	MOUNTING	PHOTOMETRY	SURGE PROTECTION (Option)
GR-LED-HET	2'x2' = 22 2'x4' = 24	20 watts = 20W 30 watts = 30W 40 watts = 40W 50 watts = 50W	120-277 = UNV	3000K= 3000K 3500K= 3500K 4000K= 4000K 4500K= 4500K 5000K= 5000K	White= W	82 CRI= 82	Internal = I	0-10v = D



© 2019 Selser Lighting Products All rights reserved.

Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selser Lighting Products reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

SELSE[™]
LIGHTING PRODUCTS

Selser Lighting Products
Po Box 45160
Baton Rouge, La. 70895
Phone # (225) 412-0025