

Weaver

Community Hammock Structure


KAMMOK

Setup Instructions^{3.0}

Parts Included

Poles (24 total)

- **V** x14



- **W** x2



- **X** x2




- **Y** x2



- **Z** x4



Joints x 12



Hammock straps x16




Hardware


- **5/16" 2.5" bolts x48**
(with x48 nuts and x48 washers)

What You'll Need

- **1/2" wrench**



- **1/2" socket wrench**



Designed in Austin, Texas | Made in USA




Adventure grade. Better made.

Flip for Instructions ►


PLEASE NOTE:

All of the bolts should be assembled as shown right. There should be a washer on each side and the bolt should come from the outside into the inside of the structure.

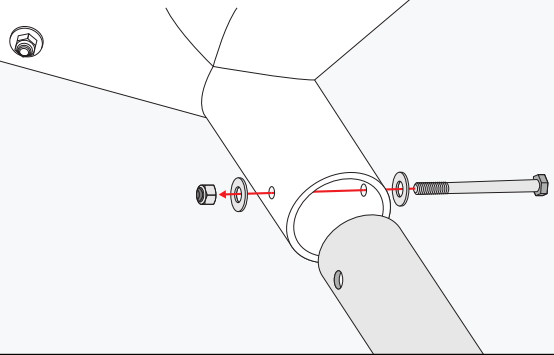

1 Layout Weaver base


Place 6 joints and 6 "V" pipes to make the base.

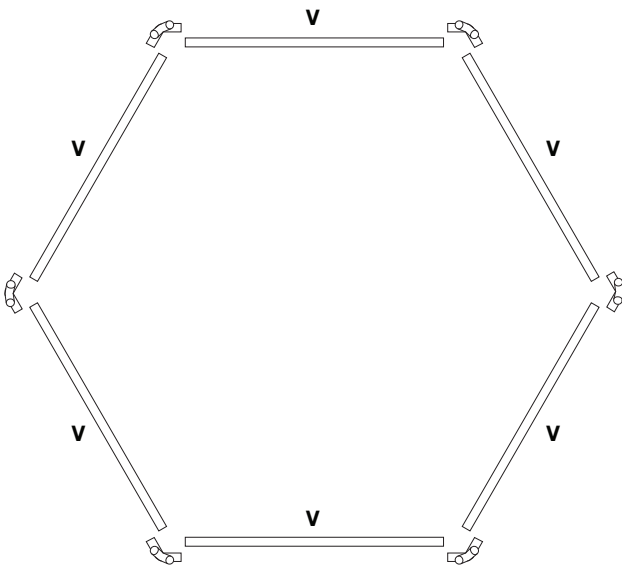

2 Assemble Weaver base

Join the 6 joints and 6 "V" pipes with bolts.







Note: Now is the easiest time to adjust the location of the Weaver.

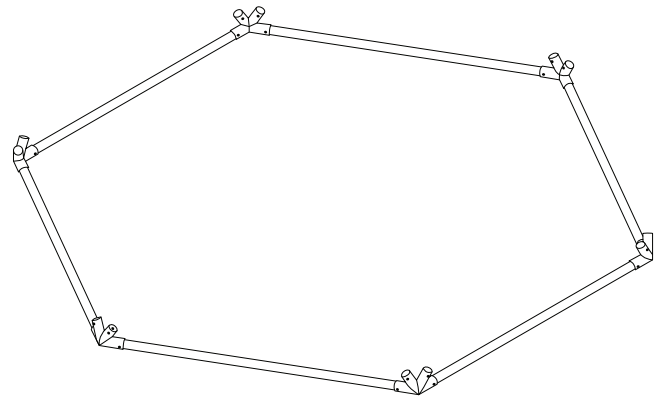

3 Create "A" frames


Assemble 6 "A" frames with joints.

Ensure that two have a W and a V pipe, two have a V and an X pipe, and two have two V pipes.




4 Place the “A” frames

Arrange the “A” frames around the weaver as shown above. Ensure that the bottom hooks on “A₁” frame and “A₂” frame point at each other and that duplicate frames face opposite one another.

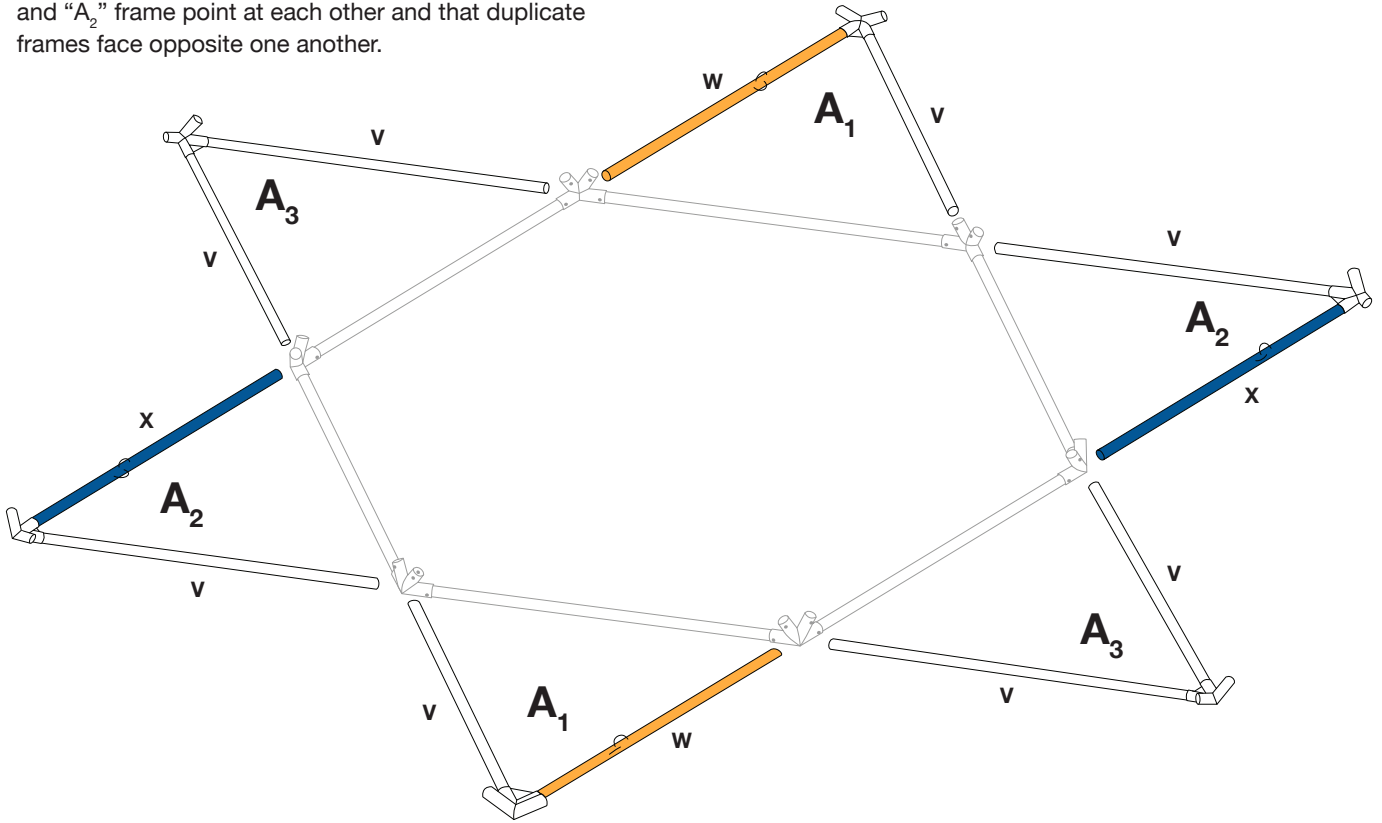


5_A Assemble the “A” frames to the base

Place one “A” frame into the base as shown. This is most easily done with 3 (or more) people, one on each side of the “A” frame and one (or more) placing the bolts into the joints as the “A” frame is lowered into place.

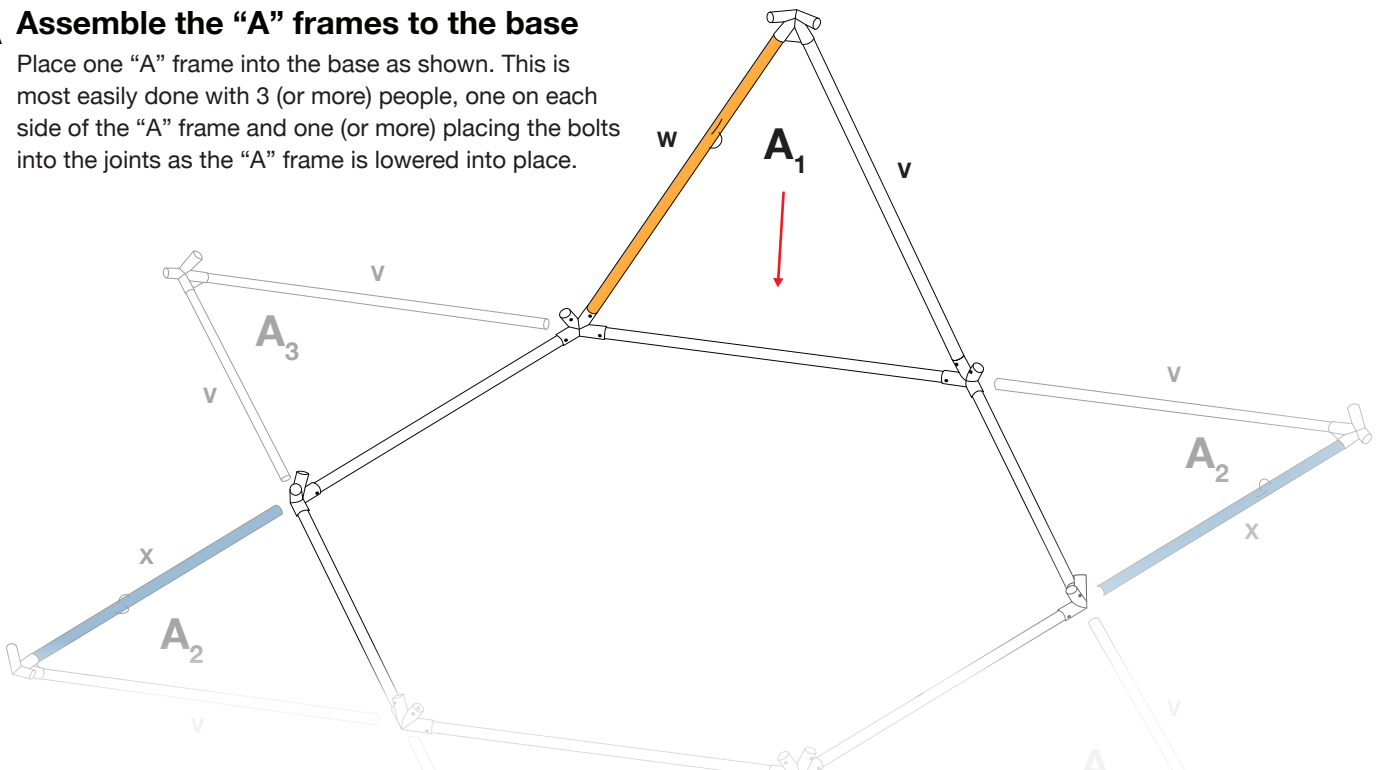


5_B Repeat process

Continue to work your way around the Weaver, raising and installing the “A” frames.

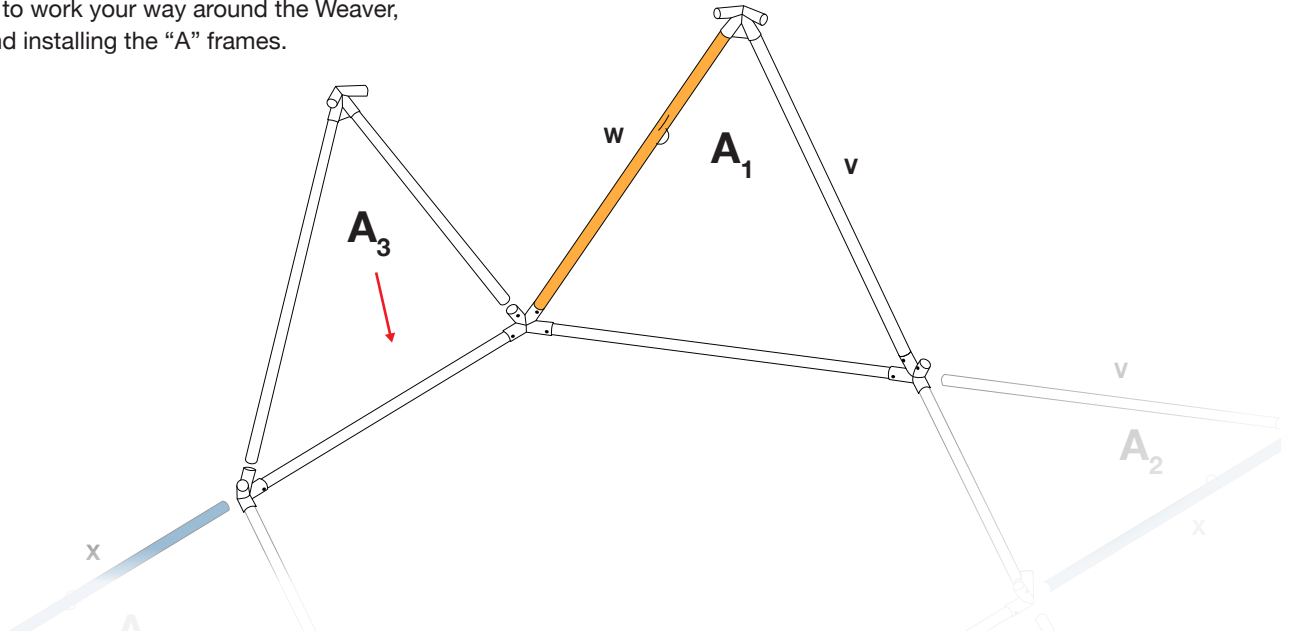



5_C Finish assembling the “A” frames to the base

This is what the Weaver will look like once you finish installing the “A” frames.

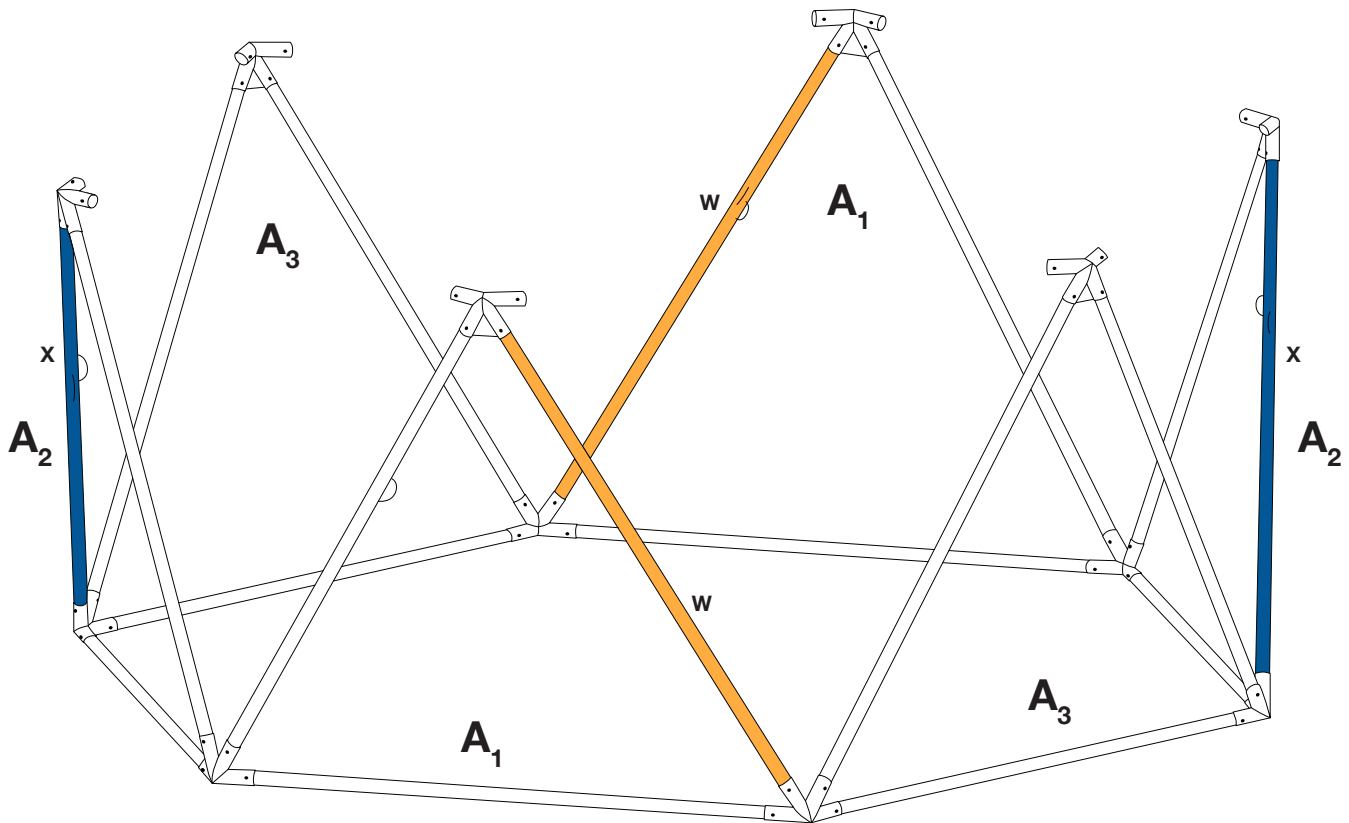


6_A Assemble the top

Begin with the top by placing a Y pole between a A_1 and A_2 frames. Make sure the hooks on Y are facing towards the inside of the Weaver. This is easily done with one or two people holding the pole and one or more others helping align the pole into the joint, securing with a bolt.

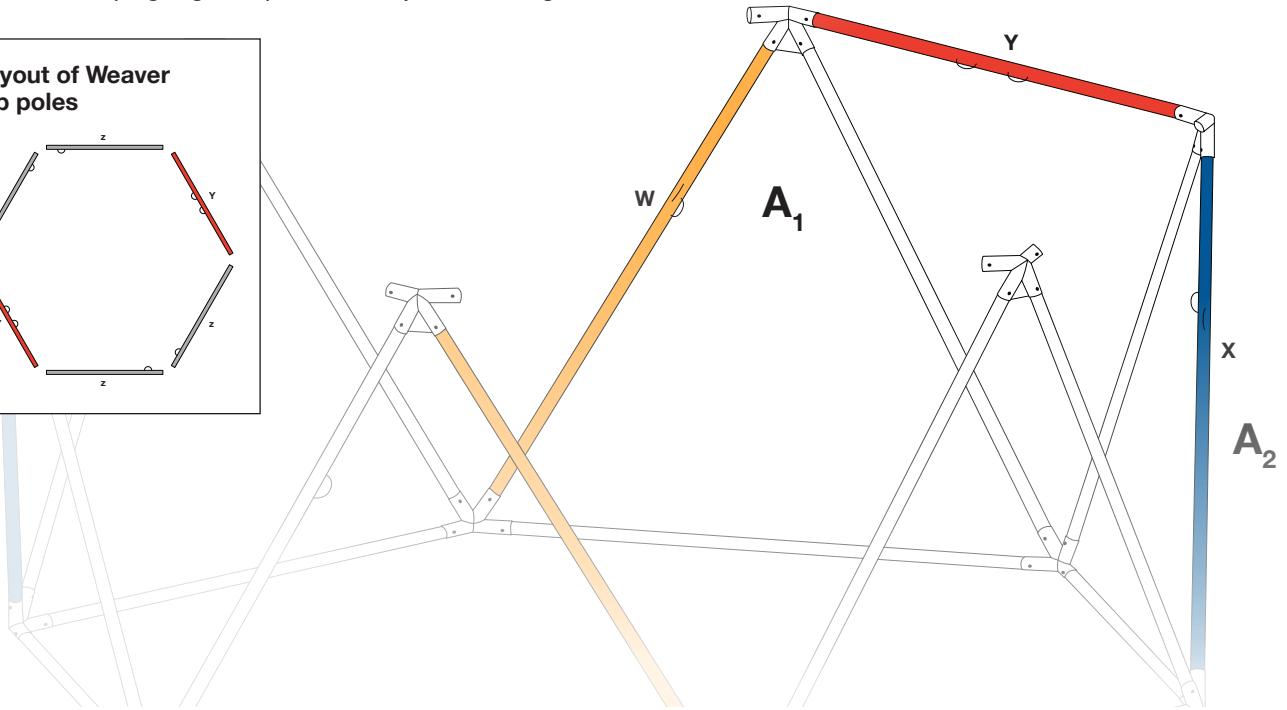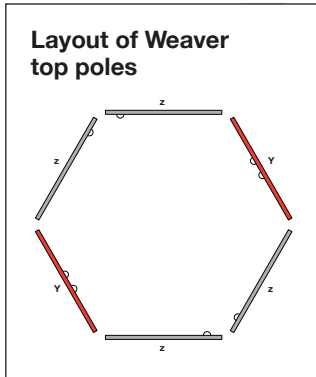


6_B Assemble the top

Next place a Z pole between the A_2 and A_3 frames with the hook closest to the A_3 frame. Then place another Z pole between the A_3 frame and the A_1 frame with the hook closest to the A_3 frame.

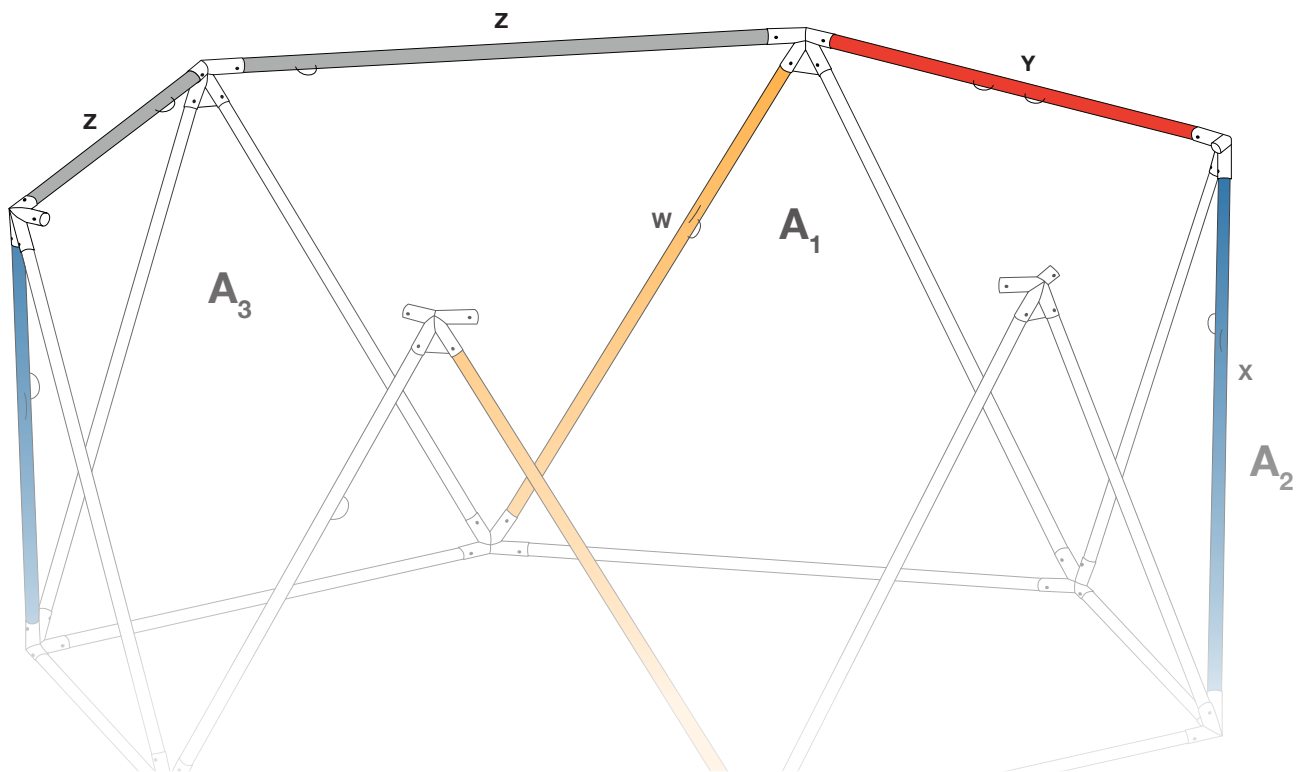

6_c Assemble the top

Repeat the previous two steps to finish the top. The final product should look like the picture below. Ensure that the two Y poles are across from each other.

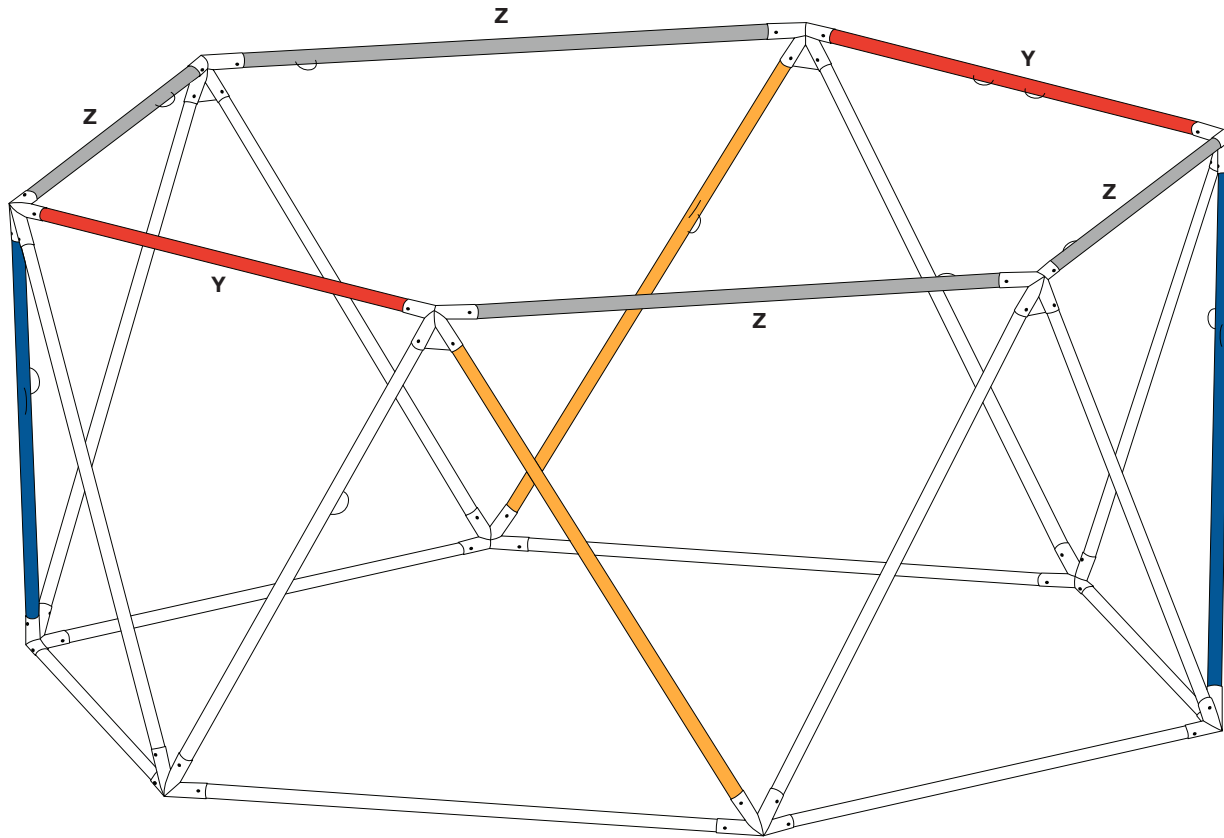

7 Install the hammocks

On the bottom layer, place hammocks on the hooks facing towards each other. The bottom hooks go together and the top hooks go together.

Using the short straps provided, loop the strap through itself on the last loop and pull through (as shown below). Then clip in the hammock, making sure that the hammocks don't rub the ground.

Congratulations! Now hop in a hammock. You deserve it!

