



EXTENDED FAMILY

FIT RECESSED_160

FIT 48V_174

FIT



					P	CCT	Beam	I	Flux	LOR
FIT Ø80	A357-0-	Ø -11-	WT	NT	19W	3000K	19°	550mA	2500Lm	90%
	A357-0-	Ø -12-	WT	NT	19W	4000K	19°	550mA	2540Lm	90%
	A357-0-	Ø -21-	WT	NT	19W	3000K	28°	550mA	2500Lm	84%
	A357-0-	Ø -22-	WT	NT	19W	4000K	28°	550mA	2540Lm	84%
	A357-0-	Ø -31-	WT	NT	19W	3000K	37°	550mA	2500Lm	85%
	A357-0-	Ø -32-	WT	NT	19W	4000K	37°	550mA	2540Lm	85%


220-240 V~ |
 IP20 |
 CRI>90 |
 L80B10 > 60.000 h |
 MacAdam Step 2 |
 OPTIONS* |
 INCL |
 TRACK 3L |
 360° |
 90° |
 19°/28°/37°

Ø	*OPTIONS
1	No DIM
2	DIM DALI

ACCESSORY

FIT Ø80 Anti-glare Honeycomb Louver ** A357-00-00

NOT SOLD SEPARATELY

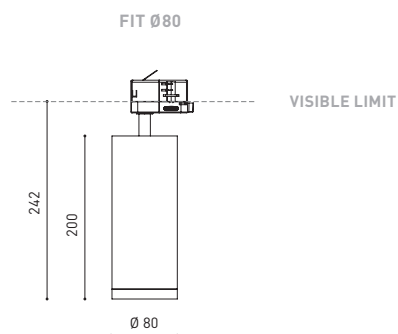

COLOUR | WT RAL 9016 | NT RAL 9005 |

MATERIAL | AL | PC |

TRACK 3L » 226

** ACCESSORY AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT



					P	CCT	Beam	I	Flux	LOR
FIT Ø65	A356-01-11-	WT	NT		10,3W	3000K	18°	300mA	1300Lm	90%
	A356-01-12-	WT	NT		10,3W	4000K	18°	300mA	1320Lm	90%
	A356-01-21-	WT	NT		10,3W	3000K	26°	300mA	1300Lm	88%
	A356-01-22-	WT	NT		10,3W	4000K	26°	300mA	1320Lm	88%
	A356-01-31-	WT	NT		10,3W	3000K	36°	300mA	1300Lm	84%
	A356-01-32-	WT	NT		10,3W	4000K	36°	300mA	1320Lm	84%

| 220 V~ | IP20 | CRI>90 | L80B10 > 60.000 h |
 MacAdam Step 2 | INCL | TRACK 3L | 360° | 90° | 18°/26°/36°


					P	CCT	Beam	I	Flux	LOR
FIT Ø65	A356-02-11-	WT	NT		10,3W	3000K	18°	300mA	1300Lm	90%
	A356-02-12-	WT	NT		10,3W	4000K	18°	300mA	1320Lm	90%
	A356-02-21-	WT	NT		10,3W	3000K	26°	300mA	1300Lm	88%
	A356-02-22-	WT	NT		10,3W	4000K	26°	300mA	1320Lm	88%
	A356-02-31-	WT	NT		10,3W	3000K	36°	300mA	1300Lm	84%
	A356-02-32-	WT	NT		10,3W	4000K	36°	300mA	1320Lm	84%

| 220 V~ | IP20 | CRI>90 | L80B10 > 60.000 h |
 MacAdam Step 2 | DALI | INCL | TRACK 3L | 360° | 90° | 18°/26°/36°

ACCESSORY

FIT Ø65 Anti-glare Honeycomb Louver ** A356-00-00

NOT SOLD SEPARATELY

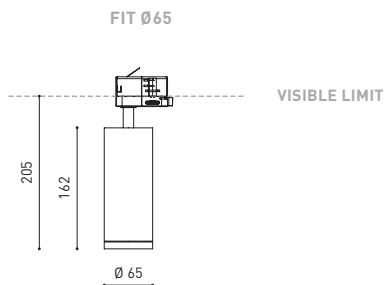

COLOUR | WT RAL 9016 | NT RAL 9005 |

MATERIAL | AL | PC |

TRACK 3L » 226

** ACCESSORY AFFECTS THE LIGHTING PARAMETERS

» PLEASE CONSULT

