

Specifications

LED Module: Tridonic | Osram | Vossloh Schwabe | Samsung
Lumen Maintenance & Life Expectancy: L80 B10 >50,000h
Lumen Output Range: 1100 - 4800lm/m
Profile Dimensions: W90mm x H100mm
Protection Rate: IP20 | IP54 on request
CRI: Ra80 | Ra90 on request
Colour Temperature: 3000K | 4000K | 27-57K Tunable White
Colour Stability: 3 Step MacAdam
Distribution: Direct
Diffuser: Ice
Dimming: Non-dim | DALI | 0-10V | Switch-dim
Warranty: 5 Years | Extended on request

Features: Mitered Corners | No visible fixings | Removable gear plates | Socket End Caps to prevent light leakage | Independent test reports

How to Specify

Follow the steps below to specify your requirements:

1 Select Profile & Colour	2 Select length	3 Select distribution	4 Select Kelvin & CRI	5 Select control	6 Select installation	7 Select extras
TUBE—## (Colour Suffix)	Specify in mm	Direct (DIR)	3000K 80Ra (3K)	Non Dim (ND)	Ceiling Surface (CS)	Emergency (EM)
TUBE—CC (Custom Colour)			4000K 80Ra (4K)	DALI (DALI)	Wall Surface (WS)	DALI Sensor (DS)
				1-10V (10V)	Rod Suspension (RSP)	LED Downlights (DL)
				Switch (SW)	Wire Suspension (WSP)	LED Spotlights (SL)

Specification Examples:

TUBE-WT-1200-DIR[2]-3K-DALI-CS
 TUBE-MB-2000-DIR[3]-4K-ND-WSP-EM

Lumen Maintenance & Life Expectancy

- All LED modules are selected from within 3 MacAdams.
- Independent LM79, LM80 and TM21 test reports are available on request.
- Independent photometric files are available on request.
- L80 B10 >50,000h

Lumen Output Suffix

Suffix	Lm/m	L80 B10
1	1100	50,000h
2	1600	50,000h
3	2600	50,000h
4	3700	50,000h
5	4800	50,000h


More outputs available on request

Colour Options



Custom colours and anodized finishes on request

Mounting Options

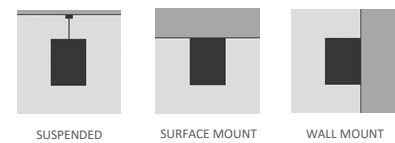

Dimensions & Construction

