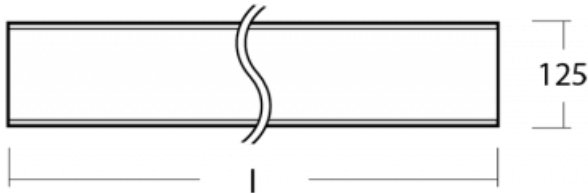



Zuli

Assembly

Light distribution


Energy class

A++, A+, A

Marks


Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
121-301K-10GEE/840, W	580 × 50 × 125	16.2	2120	4000	-
121-301K-10GGE/840, W	580 × 50 × 125	26.6	3330	4000	-
121-301K-10GHE/840, W	580 × 50 × 125	40.6	4830	4000	-
121-301K-15GEE/840, W	855 × 50 × 125	24.2	3180	4000	-
121-301K-15GGE/840, W	855 × 50 × 125	39.7	4990	4000	-
121-301K-15GHE/840, W	855 × 50 × 125	60.9	7250	4000	-

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white
	Optic system	Opal diffuser
	Connection of the luminaires	ON/OFF DALI ON/OFF + 1h emergency ON/OFF + 3h emergency
	Ra	80

Luminaires come complete with all necessary accessories.