

The Round is a suspended or surface mounted LED fitting, available with direct only or direct/indirect light output.

This versatile luminaire is an ideal solution to suit any space with its wide range of sizes, ranging from Ø450mm through to Ø1200mm. The Round can be custom coloured and is available in a number of dimming and colour temperature options.



Specifications

Lumen Maintenance & Life Expectancy: L80 B10>50,000h

Lumen Output Range: 3254 - 14,645Lm

Height Dimensions: 105mm

CRI: Ra90

Colour Temperature: 3000K | 4000K


Distribution: Direct | Direct/Indirect (option for suspended)

Distribution: Varying outputs to achieve the desired % of uplight | Uplight can be run separate to downlight

Diffuser Options: Opal PMMA | Micro Prismatic

Material: Cast Aluminium

Dimming: Non-dim | DALI | 0-10V | Mains Dimmable



How to Specify

Follow the steps below to specify your requirements:

1 Select Size & Colour	2 Select Distribution	3 Select Kelvin	4 Select Control	5 Select Installation
Round600-## (Colour Suffix)	Direct (DIR)	3000K (3K)	Non Dim (ND)	Surface Mounted (SM)
	Direct/Indirect (DIR/IND)	4000K (4K)	DALI (DALI)	Suspended (SUS)
			1-10V (10V)	
			MAINS (MD)	

Specification Examples:

Round450-DIR-4K-MD-SUS-BT

Round900-DIR/IND-3K-ND-SM-WT

Colour Options




Custom colours on request

Diffuser Options



Dimensions

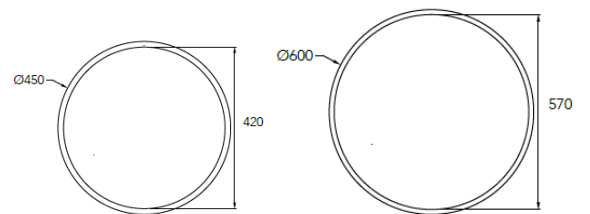

Size and Output

Size	Wattage	Lumen Output
450mm	28W	± 3254Lm
600mm	46W	± 5288Lm
900mm	86W	± 9763Lm
1200mm	129W	± 14,645Lm