

The Round is a surface mounted or suspended LED fitting, available with direct only or direct/indirect light output.

This versatile luminaire is an ideal solution to suit any space with its wide range of sizes, ranging from Ø450mm through to Ø1200mm. The Round can be custom coloured and is available in a number of dimming and colour temperature options.



Specifications

Lumen Maintenance & Life Expectancy: L80 B10 >50,000h

Lumen Output Range: 3254 - 14,645Lm

Height Dimensions: 105mm

CRI: Ra80

Colour Temperature: 3000K | 4000K | 6000K

Distribution: Direct | Direct/Indirect

Diffuser: Opal PMMA

Material: Cast Aluminium

Dimming: Non-dim | DALI | 0-10V | Mains Dimmable

How to Specify

Follow the steps below to specify your requirements:

1 Select Size & Colour	2 Select Distribution	3 Select Kelvin	4 Select Control	5 Select Installation
Round720-## (Colour Suffix)	Direct (DIR)	3000K (3K)	Non Dim (ND)	Surface Mounted (SM)
	Direct/Indirect (DIR/IND)	4000K (4K)	DALI (DALI)	Suspended (SUS)
		6000K (6K)	1-10V (10V)	
			MAINS (MD)	

Specification Examples:

Round450-BT-DIR-4K-MD-SUS


Round900-WT-DIR/IND-3K-ND-SM

Colour Options



Custom colours on request

Dimensions Examples

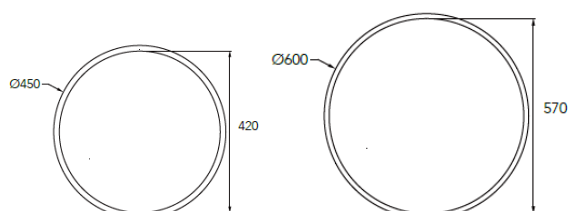

Size and Output

Size	Wattage	Lumen Output
Ø380mm	21W	2,400Lm
Ø450mm	28W	3,254Lm
Ø600mm	46W	5,288Lm
Ø720mm	64W	7,322Lm
Ø900mm	86W	9,763Lm
Ø1200mm	129W	14,645Lm