

**Order options**

**SYSTEM POWER**

9W  
10W  
13W

**COLOUR TEMPERATURE**

2700K  
3000K  
4000K

**COLOUR RENDERING INDEX**

CRI 80  
CRI 90


**ELECTRICAL**

non DIM  
phase DIM  
1-10V  
DALI

**LENS**



**PRIMARY REFLECTOR**



**TRIM**



**TRIMLESS**



**ANTI-GLARE ACCESSORY**



Honeycomb mesh

**SECONDARY REFLECTOR**




Specular Chrome Black White



Matt Black Gold


**SRA68**

**3000K**  
(Standard)

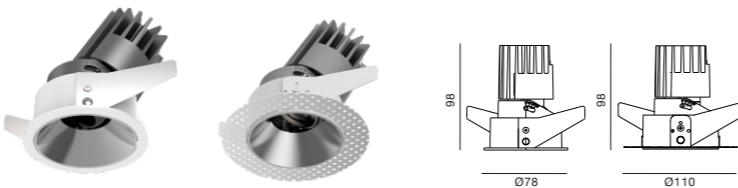

**Light distribution for 3000K**

**7.5 W 600lm-650lm**

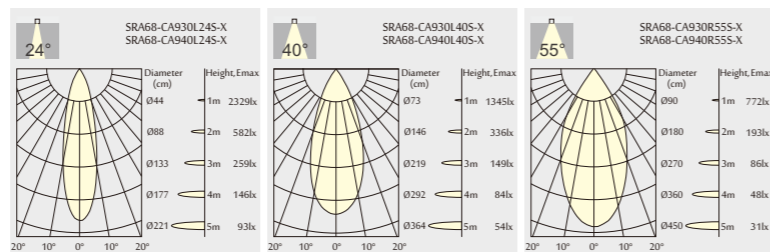


**Order Information**

**SRA68 600-650 Lm MODELS** (White trim, CITIZEN LED, Specular reflector)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
SRA68-CA930L24S-X	850 lm	600 lm	31 V	250mA	7.5 W	9 W	90	3000K	24°
SRA68-CA940L24S-X	900 lm	650 lm	31 V	250mA	7.5 W	9 W	90	4000K	24°
SRA68-CA930L40S-X	850 lm	600 lm	31 V	250mA	7.5 W	9 W	90	3000K	40°
SRA68-CA940L40S-X	900 lm	650 lm	31 V	250mA	7.5 W	9 W	90	4000K	40°
SRA68-CA930R55S-X	850 lm	500 lm	31 V	250mA	7.5 W	9 W	90	3000K	55°
SRA68-CA940R55S-X	900 lm	550 lm	31 V	250mA	7.5 W	9 W	90	4000K	55°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

**11 W 800lm-850lm**

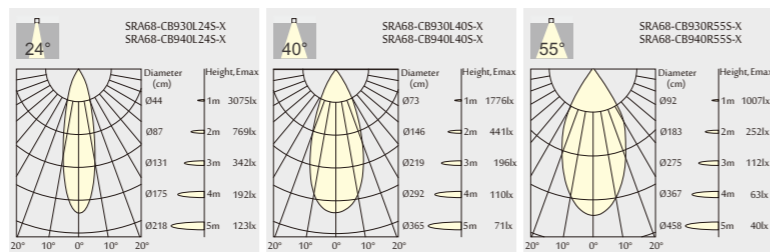


**Order Information**

**SRA68 800-850 Lm MODELS** (White trim, CITIZEN LED, Specular reflector)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
SRA68-CB930L24S-X	1100 lm	800 lm	31 V	350mA	11 W	13 W	90	3000K	24°
SRA68-CB940L24S-X	1200 lm	850 lm	31 V	350mA	11 W	13 W	90	4000K	24°
SRA68-CB930L40S-X	1100 lm	800 lm	31 V	350mA	11 W	13 W	90	3000K	40°
SRA68-CB940L40S-X	1200 lm	850 lm	31 V	350mA	11 W	13 W	90	4000K	40°
SRA68-CB930R55S-X	1100 lm	650 lm	31 V	350mA	11 W	13 W	90	3000K	55°
SRA68-CB940R55S-X	1200 lm	700 lm	31 V	350mA	11 W	13 W	90	4000K	55°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

**8.5 W 350lm-380lm Narrow Spot Beam Version**

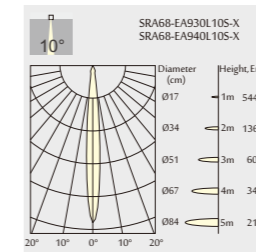

**Order Information**

**SRA68 350-380 Lm MODELS** (White trim, CREE LED, Specular reflector)

Code	LED output	Module output	CD	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
SRA68-EA930L10S-X	600 lm	350 lm	5444 cd	12 V	700mA	8.5 W	10 W	90	3000K	10°
SRA68-EA940L10S-X	650 lm	380 lm	5666 cd	12 V	700mA	8.5 W	10 W	90	4000K	10°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

