

Order options

SYSTEM POWER

28W
42W

COLOUR TEMPERATURE

2700K
3000K
4000K


COLOUR RENDERING INDEX

CRI 80
CRI 90

ELECTRICAL

non DIM
phase DIM
1-10V
DALI

PRIMARY REFLECTOR



20° Beam 35° Beam 50° Beam

TRIM



Trim (Standard)

TRIMLESS



EiVersion

ANTI-GLARE ACCESSORY



Honeycomb mesh

SECONDARY REFLECTOR




Specular Chrome Black White



Matt Black Gold


SRA150

3000K
(Standard)

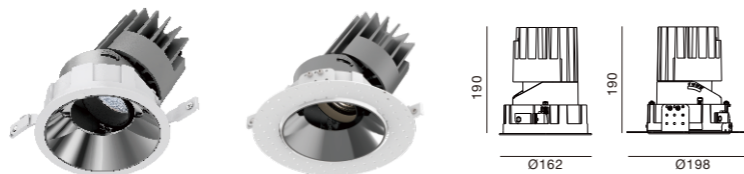

Light distribution for 3000K

25W 1800lm-1900lm

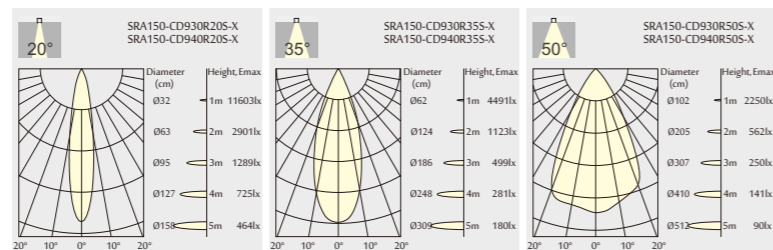


Order Information

SRA150 1800-1900 Lm MODELS (White trim, CITIZEN LED, Specular reflector)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
SRA150-CD930R20S-X	2700 lm	1800 lm	36 V	700mA	25 W	28 W	90	3000K	20°
SRA150-CD940R20S-X	2800 lm	1900 lm	36 V	700mA	25 W	28 W	90	4000K	20°
SRA150-CD930R35S-X	2700 lm	1800 lm	36 V	700mA	25 W	28 W	90	3000K	35°
SRA150-CD940R35S-X	2800 lm	1900 lm	36 V	700mA	25 W	28 W	90	4000K	35°
SRA150-CD930R50S-X	2700 lm	1800 lm	36 V	700mA	25 W	28 W	90	3000K	50°
SRA150-CD940R50S-X	2800 lm	1900 lm	36 V	700mA	25 W	28 W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

38 W 2500lm-2700lm

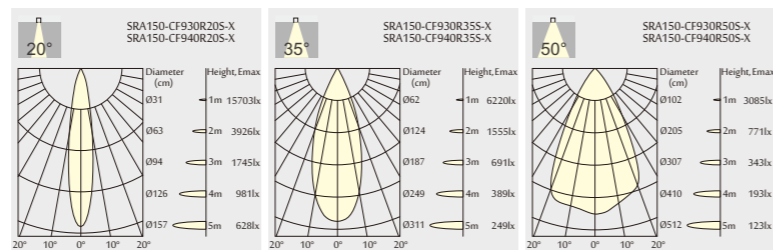

Order Information

SRA150 2500-2700 Lm MODELS (White trim, CITIZEN LED, Specular reflector)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
SRA150-CF930R20S-X	3700 lm	2500 lm	36 V	1050mA	38 W	42 W	90	3000K	20°
SRA150-CF940R20S-X	3900 lm	2700 lm	36 V	1050mA	38 W	42 W	90	4000K	20°
SRA150-CF930R35S-X	3700 lm	2500 lm	36 V	1050mA	38 W	42 W	90	3000K	35°
SRA150-CF940R35S-X	3900 lm	2700 lm	36 V	1050mA	38 W	42 W	90	4000K	35°
SRA150-CF930R50S-X	3700 lm	2500 lm	36 V	1050mA	38 W	42 W	90	3000K	50°
SRA150-CF940R50S-X	3900 lm	2700 lm	36 V	1050mA	38 W	42 W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

