


IP54 CE CB F UGR < 19

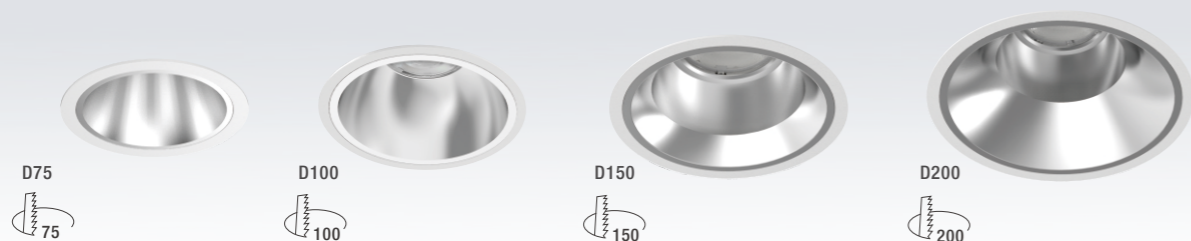

Quickinfo

GENERAL

recessed
IP 54

LED

COB LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Bining < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50,000h

OPTICAL

direct illumination
beam angle 18°, 25°, 30°, 50°, 60°

PHYSICAL

aluminium
powder coating

Function

Small size with cutout of 100mm. Integrated mechanicals of heatsink and mounting ring to reduce components. Deep recessed design achieves super eye comfort. Attractive appearance with efficiency and functionality. Passive management ensures durability.

Optimal lens technologies with medium and flood beam angles guarantee light quality. Interchangeable reflectors of matt, white and black colors provide maximum design freedom. Applicable to all typical downlight contexts.

Features



- Focus on every detail
- Low glare for optimal eye comfort

Order options

SYSTEM POWER

9W
13W

COLOUR TEMPERATURE

2700K
3000K
4000K


COLOUR RENDERING INDEX

CRI 80
CRI 90

ELECTRICAL

Non-Dim
Phase Dim
1-10V
DALI

LENS



25° Beam 50° Beam

REFLECTOR



Matt White Black


D75

3000K
(Standard)



Light distribution for 3000K

7.5W 700 lm-750 lm

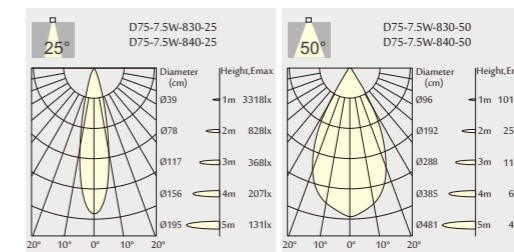


Order Information

D75-7.5W 700-750 Lm MODELS (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
D75-7.5W-830-25	1000 lm	700 lm	31 V	250 mA	7.5W	9W	83	3000K	25°
D75-7.5W-840-25	1100 lm	750 lm	31 V	250 mA	7.5W	9W	83	4000K	25°
D75-7.5W-830-50	1000 lm	700 lm	31 V	250 mA	7.5W	9W	83	3000K	50°
D75-7.5W-840-50	1100 lm	750 lm	31 V	250 mA	7.5W	9W	83	4000K	50°

11W 900 lm-950 lm

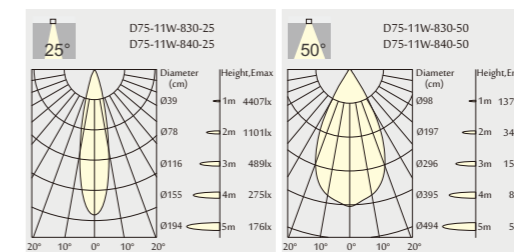

Order Information

D75-11W 900-950 Lm MODELS (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
D75-11W-830-25	1300 lm	900 lm	31 V	350 mA	11W	13W	83	3000K	25°
D75-11W-840-25	1400 lm	950 lm	31 V	350 mA	11W	13W	83	4000K	25°
D75-11W-830-50	1300 lm	900 lm	31 V	350 mA	11W	13W	83	3000K	50°
D75-11W-840-50	1400 lm	950 lm	31 V	350 mA	11W	13W	83	4000K	50°