

Order options

SYSTEM POWER

11W
15W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI 80
CRI 90

ELECTRICAL

Non-Dim
Phase Dim
1-10V
DALI

LENS



REFLECTOR




D100

3000K
(Standard)



Light distribution for 3000K

9W 1000 lm-1200 lm

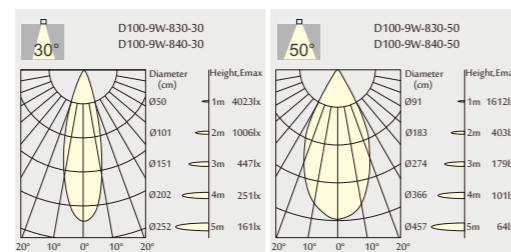


Order Information

D100-9W 1000-1200 Lm MODELS (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
D100-9W-830-30	1300 lm	1100 lm	36 V	260 mA	9 W	11 W	83	3000K	30°
D100-9W-840-30	1400 lm	1200 lm	36 V	260 mA	9 W	11 W	83	4000K	30°
D100-9W-830-50	1300 lm	1000 lm	36 V	260 mA	9 W	11 W	83	3000K	50°
D100-9W-840-50	1400 lm	1100 lm	36 V	260 mA	9 W	11 W	83	4000K	50°

13W 1300 lm-1600 lm

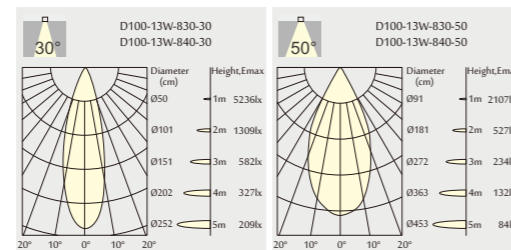

Order Information

D100-13W 1300-1600 Lm MODELS (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
D100-13W-830-30	1800 lm	1500 lm	36 V	350 mA	13 W	15 W	83	3000K	30°
D100-13W-840-30	1900 lm	1600 lm	36 V	350 mA	13 W	15 W	83	4000K	30°
D100-13W-830-50	1800 lm	1300 lm	36 V	350 mA	13 W	15 W	83	3000K	50°
D100-13W-840-50	1900 lm	1400 lm	36 V	350 mA	13 W	15 W	83	4000K	50°

Order options

SYSTEM POWER

21W
28W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI 80
CRI 90

ELECTRICAL

Non-Dim
Phase Dim
1-10V
DALI

LENS



REFLECTOR




D150

3000K
(Standard)



Light distribution for 3000K

18W 2000 lm-2500 lm

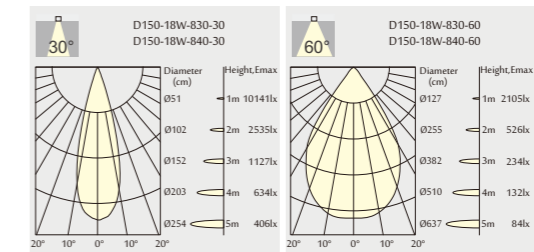


Order Information

D150-18W 2000-2500 Lm MODELS (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
D150-18W-830-30	2800 lm	2300 lm	36 V	500 mA	18 W	21 W	83	3000K	30°
D150-18W-840-30	3000 lm	2500 lm	36 V	500 mA	18 W	21 W	83	4000K	30°
D150-18W-830-60	2800 lm	2000 lm	36 V	500 mA	18 W	21 W	83	3000K	60°
D150-18W-840-60	3000 lm	2200 lm	36 V	500 mA	18 W	21 W	83	4000K	60°

25W 2700 lm-3300 lm

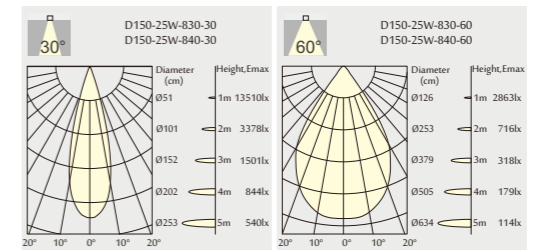

Order Information

D150-25W 2700-3300 Lm MODELS (CITIZEN LED)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
D150-25W-830-30	3800 lm	3100 lm	36 V	700 mA	25 W	28 W	83	3000K	30°
D150-25W-840-30	4000 lm	3300 lm	36 V	700 mA	25 W	28 W	83	4000K	30°
D150-25W-830-60	3800 lm	2700 lm	36 V	700 mA	25 W	28 W	83	3000K	60°
D150-25W-840-60	4000 lm	2900 lm	36 V	700 mA	25 W	28 W	83	4000K	60°