





**START/SRF**  
LED Downlight-Fixed



SRF125 18 W 500mA

3000K


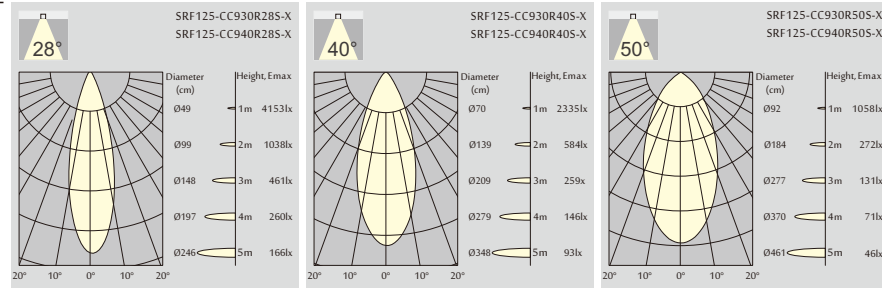


Order Information

SRF125 1300-1400 Lm MODELS (White trim, CITIZEN LED, Specular Reflector)


Code	LED output	Downlight output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
SRF125-CC930R28S-X	1800 lm	1300 lm	36V	500mA	18 W	21 W	90	3000K	28°
SRF125-CC940R28S-X	2000 lm	1400 lm	36V	500mA	18 W	21 W	90	4000K	28°
SRF125-CC930R40S-X	1800 lm	1300 lm	36V	500mA	18 W	21 W	90	3000K	40°
SRF125-CC940R40S-X	2000 lm	1400 lm	36V	500mA	18 W	21 W	90	4000K	40°
SRF125-CC930R50S-X	1800 lm	1300 lm	36V	500mA	18 W	21 W	90	3000K	50°
SRF125-CC940R50S-X	2000 lm	1400 lm	36V	500mA	18 W	21 W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)



SRF150 25 W 700mA

3000K (Standard)

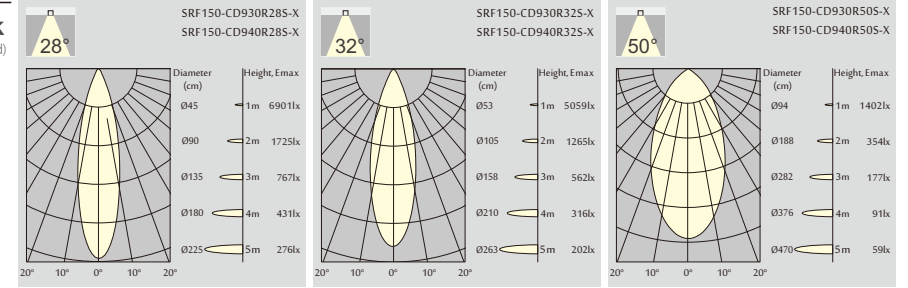

Order Information


SRF150 1800-1900 Lm MODELS (White trim, CITIZEN LED, Specular Reflector)

Code	LED output	Downlight output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
SRF150-CD930R28S-X	2500 lm	1800 lm	36V	700mA	25 W	28 W	90	3000K	28°
SRF150-CD940R28S-X	2700 lm	1900 lm	36V	700mA	25 W	28 W	90	4000K	28°
SRF150-CD930R32S-X	2500 lm	1800 lm	36V	700mA	25 W	28 W	90	3000K	32°
SRF150-CD940R32S-X	2700 lm	1900 lm	36V	700mA	25 W	28 W	90	4000K	32°
SRF150-CD930R50S-X	2500 lm	1800 lm	36V	700mA	25 W	28 W	90	3000K	50°
SRF150-CD940R50S-X	2700 lm	1900 lm	36V	700mA	25 W	28 W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

SRF125 25 W 700mA

3000K (Standard)

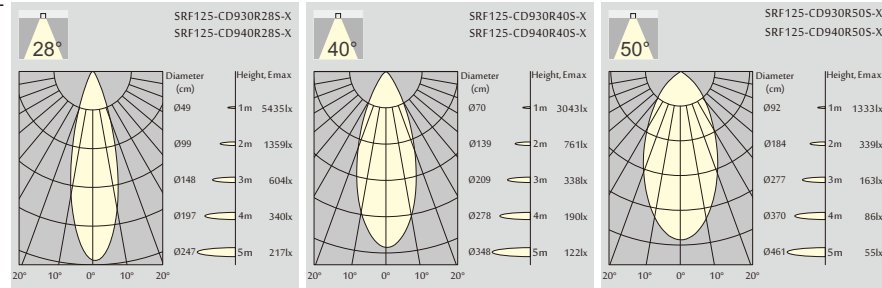

Order Information


SRF125 1600-1700 Lm MODELS (White trim, CITIZEN LED, Specular Reflector)

Code	LED output	Downlight output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
SRF125-CD930R28S-X	2400 lm	1600 lm	36V	700mA	25 W	28 W	90	3000K	28°
SRF125-CD940R28S-X	2600 lm	1700 lm	36V	700mA	25 W	28 W	90	4000K	28°
SRF125-CD930R40S-X	2400 lm	1600 lm	36V	700mA	25 W	28 W	90	3000K	40°
SRF125-CD940R40S-X	2600 lm	1700 lm	36V	700mA	25 W	28 W	90	4000K	40°
SRF125-CD930R50S-X	2400 lm	1600 lm	36V	700mA	25 W	28 W	90	3000K	50°
SRF125-CD940R50S-X	2600 lm	1700 lm	36V	700mA	25 W	28 W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

SRF150 38 W 1050mA

3000K (Standard)

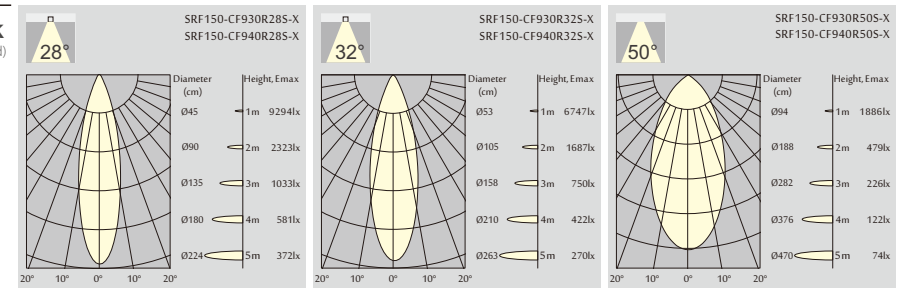

Order Information

SRF150 2200-2400 Lm MODELS (White trim, CITIZEN LED, Specular Reflector)

Code	LED output	Downlight output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
SRF150-CF930R28S-X	3500 lm	2400 lm	36V	1050mA	38 W	42 W	90	3000K	28°
SRF150-CF940R28S-X	3700 lm	2600 lm	36V	1050mA	38 W	42 W	90	4000K	28°
SRF150-CF930R32S-X	3500 lm	2400 lm	36V	1050mA	38 W	42 W	90	3000K	32°
SRF150-CF940R32S-X	3700 lm	2600 lm	36V	1050mA	38 W	42 W	90	4000K	32°
SRF150-CF930R50S-X	3500 lm	2400 lm	36V	1050mA	38 W	42 W	90	3000K	50°
SRF150-CF940R50S-X	3700 lm	2600 lm	36V	1050mA	38 W	42 W	90	4000K	50°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

