

White




- **Housing**  
The design of the outer case and the internal heat sink combination to induce forced convection transfer for excellent heat dissipation.
- **Reflector**  
Black NGR finish.
- **Mounting Track**  
Standard or recessed mounting version available.  
For the three-circuit track system.

Black




Standard Track (ON/OFF)

Dimension W62 X L230 X H175  
 Power Consumption(SMPS included) 15W  
 Operating Voltage AC100-240V  
 Material AL, PC  
 Weight 0.85kg

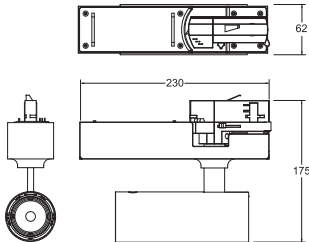


Control Track (1-10V, DALI)

Dimension W62 X L242 X H175  
 Power Consumption(SMPS included) 15W  
 Operating Voltage AC100-240V  
 Material AL, PC  
 Weight 0.85kg

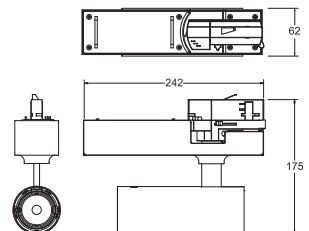


MODEL NO.	CONTROL	POWER CONSUMPTION	LAMP LUMINOUS(lm)	LOR	COLOR RENDERING INDEX(RA)	COLOR TEMPERATURE(K)	BEAM ANGLE	BODY COLOR	REFLECTOR FINISH
18310W-827C-015-019	○	15W	1800	0.70	80	2700	19	White	Black
18310D-827C-015-019	○	15W	1800	0.70	80	2700	19	Black	Black
18310W-827C-015-025	○	15W	1800	0.67	80	2700	25	White	Black
18310D-827C-015-025	○	15W	1800	0.67	80	2700	25	Black	Black
18310W-827C-015-036	○	15W	1800	0.67	80	2700	36	White	Black
18310D-827C-015-036	○	15W	1800	0.67	80	2700	36	Black	Black
18310W-827C-015-050	○	15W	1800	0.66	80	2700	50	White	Black
18310D-827C-015-050	○	15W	1800	0.66	80	2700	50	Black	Black
18313W-827C-015-019	○	15W	1800	0.70	80	2700	19	White	Black
18313D-827C-015-019	○	15W	1800	0.70	80	2700	19	Black	Black
18313W-827C-015-025	○	15W	1800	0.67	80	2700	25	White	Black
18313D-827C-015-025	○	15W	1800	0.67	80	2700	25	Black	Black
18313W-827C-015-036	○	15W	1800	0.67	80	2700	36	White	Black
18313D-827C-015-036	○	15W	1800	0.67	80	2700	36	Black	Black
18313W-827C-015-050	○	15W	1800	0.66	80	2700	50	White	Black
18313D-827C-015-050	○	15W	1800	0.66	80	2700	50	Black	Black
18310W-830C-015-019	○	15W	1800	0.70	80	3000	19	White	Black
18310D-830C-015-019	○	15W	1800	0.70	80	3000	19	Black	Black
18310W-830C-015-025	○	15W	1800	0.67	80	3000	25	White	Black
18310D-830C-015-025	○	15W	1800	0.67	80	3000	25	Black	Black
18310W-830C-015-036	○	15W	1800	0.67	80	3000	36	White	Black
18310D-830C-015-036	○	15W	1800	0.67	80	3000	36	Black	Black
18310W-830C-015-050	○	15W	1800	0.66	80	3000	50	White	Black
18310D-830C-015-050	○	15W	1800	0.66	80	3000	50	Black	Black
18313W-830C-015-019	○	15W	1800	0.70	80	3000	19	White	Black
18313D-830C-015-019	○	15W	1800	0.70	80	3000	19	Black	Black
18313W-830C-015-025	○	15W	1800	0.67	80	3000	25	White	Black
18313D-830C-015-025	○	15W	1800	0.67	80	3000	25	Black	Black
18313W-830C-015-036	○	15W	1800	0.67	80	3000	36	White	Black
18313D-830C-015-036	○	15W	1800	0.67	80	3000	36	Black	Black
18313W-830C-015-050	○	15W	1800	0.66	80	3000	50	White	Black
18313D-830C-015-050	○	15W	1800	0.66	80	3000	50	Black	Black
18310W-840C-015-019	○	15W	1800	0.70	80	4000	19	White	Black
18310D-840C-015-019	○	15W	1800	0.70	80	4000	19	Black	Black
18310W-840C-015-025	○	15W	1800	0.67	80	4000	25	White	Black
18310D-840C-015-025	○	15W	1800	0.67	80	4000	25	Black	Black
18310W-840C-015-036	○	15W	1800	0.67	80	4000	36	White	Black
18310D-840C-015-036	○	15W	1800	0.67	80	4000	36	Black	Black
18310W-840C-015-050	○	15W	1800	0.66	80	4000	50	White	Black
18310D-840C-015-050	○	15W	1800	0.66	80	4000	50	Black	Black
18313W-840C-015-019	○	15W	1800	0.70	80	4000	19	White	Black
18313D-840C-015-019	○	15W	1800	0.70	80	4000	19	Black	Black
18313W-840C-015-025	○	15W	1800	0.67	80	4000	25	White	Black
18313D-840C-015-025	○	15W	1800	0.67	80	4000	25	Black	Black
18313W-840C-015-036	○	15W	1800	0.67	80	4000	36	White	Black
18313D-840C-015-036	○	15W	1800	0.67	80	4000	36	Black	Black
18313W-840C-015-050	○	15W	1800	0.66	80	4000	50	White	Black
18313D-840C-015-050	○	15W	1800	0.66	80	4000	50	Black	Black

Standard (ON/OFF) ○ Control System (1-10V, DALI) ○

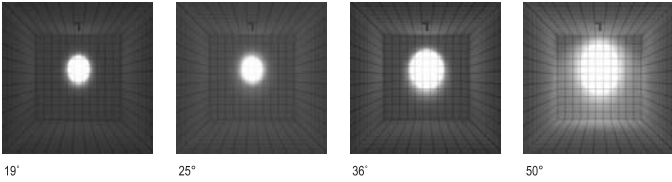

19°      25°      36°      50°

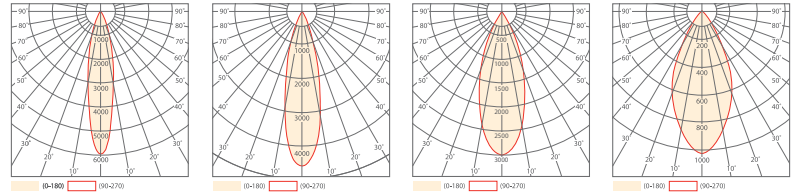

19°		25°		36°		50°	
m	Ø(m)	lux(center)	lux(side)	m	Ø(m)	lux(center)	lux(side)
1	0.37	5938	3034	1	0.47	4499	2225
2	0.74	1485	758	2	0.93	1124	556
3	1.10	660	337	3	1.40	500	247

- |                     |                     |                     |                     |
|---------------------|---------------------|---------------------|---------------------|
| 18310W-827C-015-019 | 18310W-827C-015-025 | 18310W-827C-015-036 | 18310W-827C-015-050 |
| 18310D-827C-015-019 | 18310D-827C-015-025 | 18310D-827C-015-036 | 18310D-827C-015-050 |
| 18313W-827C-015-019 | 18313W-827C-015-025 | 18313W-827C-015-036 | 18313W-827C-015-050 |
| 18313D-827C-015-019 | 18313D-827C-015-025 | 18313D-827C-015-036 | 18313D-827C-015-050 |
| 18310W-830C-015-019 | 18310W-830C-015-025 | 18310W-830C-015-036 | 18310W-830C-015-050 |
| 18310D-830C-015-019 | 18310D-830C-015-025 | 18310D-830C-015-036 | 18310D-830C-015-050 |
| 18313W-830C-015-019 | 18313W-830C-015-025 | 18313W-830C-015-036 | 18313W-830C-015-050 |
| 18313D-830C-015-019 | 18313D-830C-015-025 | 18313D-830C-015-036 | 18313D-830C-015-050 |
| 18310W-840C-015-019 | 18310W-840C-015-025 | 18310W-840C-015-036 | 18310W-840C-015-050 |
| 18310D-840C-015-019 | 18310D-840C-015-025 | 18310D-840C-015-036 | 18310D-840C-015-050 |
| 18313W-840C-015-019 | 18313W-840C-015-025 | 18313W-840C-015-036 | 18313W-840C-015-050 |
| 18313D-840C-015-019 | 18313D-840C-015-025 | 18313D-840C-015-036 | 18313D-840C-015-050 |


Track Option

For MODEL no. 18310  
Standard Track (ON/OFF)



GLOBAL Trac Pro

Standard or recessed mounting version available.  
For the three-circuit track system.

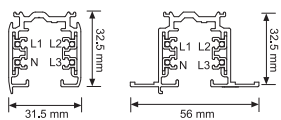


For MODEL no. 18313  
Control Track (1-10V, DALI)



GLOBAL Trac Control

For the three-circuit track for control system. (1-10V, DALI)

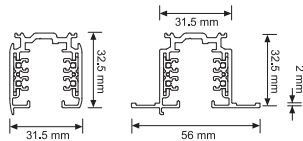

White



- **Housing**  
The design of the outer case and the internal heat sink combination to induce forced convection transfer for excellent heat dissipation.
- **Reflector**  
Black NGR finish.
- **Mounting Track**  
Standard or recessed mounting version available.  
For the three-circuit track system.


Black



Standard Track (ON/OFF)

Control Track (1-10V)


Dimension	W62 X L184 X H186
Power Consumption(SMPS included)	15W
Operating Voltage	AC100-240V
Material	AL, PC
Weight	0.70kg

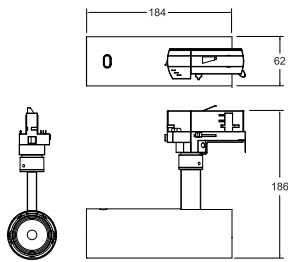


MODEL NO.	CONTROL	POWER CONSUMPTION	LAMP LUMINOUS(lm)	LOR	COLOR RENDERING INDEX(RA)	COLOR TEMPERATURE(K)	BEAM ANGLE	BODY COLOR	REFLECTOR FINISH
18360W-827C-015-019	○	15W	1800	0.70	80	2700	19	White	Black
18360D-827C-015-019	○	15W	1800	0.70	80	2700	19	Black	Black
18360W-827C-015-025	○	15W	1800	0.67	80	2700	25	White	Black
18360D-827C-015-025	○	15W	1800	0.67	80	2700	25	Black	Black
18360W-827C-015-036	○	15W	1800	0.67	80	2700	36	White	Black
18360D-827C-015-036	○	15W	1800	0.67	80	2700	36	Black	Black
18360W-827C-015-050	○	15W	1800	0.66	80	2700	50	White	Black
18360D-827C-015-050	○	15W	1800	0.66	80	2700	50	Black	Black
18363W-827C-015-019	○	15W	1800	0.70	80	2700	19	White	Black
18363D-827C-015-019	○	15W	1800	0.70	80	2700	19	Black	Black
18363W-827C-015-025	○	15W	1800	0.67	80	2700	25	White	Black
18363D-827C-015-025	○	15W	1800	0.67	80	2700	25	Black	Black
18363W-827C-015-036	○	15W	1800	0.67	80	2700	36	White	Black
18363D-827C-015-036	○	15W	1800	0.67	80	2700	36	Black	Black
18363W-827C-015-050	○	15W	1800	0.66	80	2700	50	White	Black
18363D-827C-015-050	○	15W	1800	0.66	80	2700	50	Black	Black
18360W-830C-015-019	○	15W	1800	0.70	80	3000	19	White	Black
18360D-830C-015-019	○	15W	1800	0.70	80	3000	19	Black	Black
18360W-830C-015-025	○	15W	1800	0.67	80	3000	25	White	Black
18360D-830C-015-025	○	15W	1800	0.67	80	3000	25	Black	Black
18360W-830C-015-036	○	15W	1800	0.67	80	3000	36	White	Black
18360D-830C-015-036	○	15W	1800	0.67	80	3000	36	Black	Black
18360W-830C-015-050	○	15W	1800	0.66	80	3000	50	White	Black
18360D-830C-015-050	○	15W	1800	0.66	80	3000	50	Black	Black
18363W-830C-015-019	○	15W	1800	0.70	80	3000	19	White	Black
18363D-830C-015-019	○	15W	1800	0.70	80	3000	19	Black	Black
18363W-830C-015-025	○	15W	1800	0.67	80	3000	25	White	Black
18363D-830C-015-025	○	15W	1800	0.67	80	3000	25	Black	Black
18363W-830C-015-036	○	15W	1800	0.67	80	3000	36	White	Black
18363D-830C-015-036	○	15W	1800	0.67	80	3000	36	Black	Black
18363W-830C-015-050	○	15W	1800	0.66	80	3000	50	White	Black
18363D-830C-015-050	○	15W	1800	0.66	80	3000	50	Black	Black
18360W-840C-015-019	○	15W	1800	0.70	80	4000	19	White	Black
18360D-840C-015-019	○	15W	1800	0.70	80	4000	19	Black	Black
18360W-840C-015-025	○	15W	1800	0.67	80	4000	25	White	Black
18360D-840C-015-025	○	15W	1800	0.67	80	4000	25	Black	Black
18360W-840C-015-036	○	15W	1800	0.67	80	4000	36	White	Black
18360D-840C-015-036	○	15W	1800	0.67	80	4000	36	Black	Black
18360W-840C-015-050	○	15W	1800	0.66	80	4000	50	White	Black
18360D-840C-015-050	○	15W	1800	0.66	80	4000	50	Black	Black
18363W-840C-015-019	○	15W	1800	0.70	80	4000	19	White	Black
18363D-840C-015-019	○	15W	1800	0.70	80	4000	19	Black	Black
18363W-840C-015-025	○	15W	1800	0.67	80	4000	25	White	Black
18363D-840C-015-025	○	15W	1800	0.67	80	4000	25	Black	Black
18363W-840C-015-036	○	15W	1800	0.67	80	4000	36	White	Black
18363D-840C-015-036	○	15W	1800	0.67	80	4000	36	Black	Black
18363W-840C-015-050	○	15W	1800	0.66	80	4000	50	White	Black
18363D-840C-015-050	○	15W	1800	0.66	80	4000	50	Black	Black

Standard (ON/OFF) ○ Control System (1-10V) ○

\* 1-10V Dimming Only

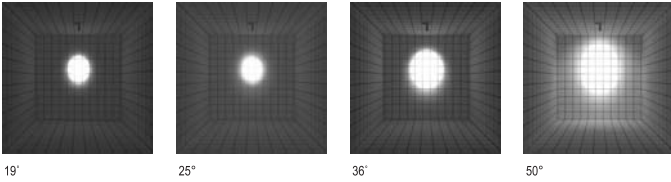

19°      25°      36°      50°

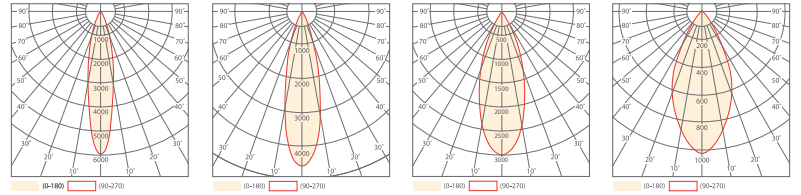

Beam Angle	Beam Diameter (Ø)	Beam Length (L)	lux(center/side)
19°	Ø180	Ø42/70	
25°	Ø180	Ø42/70	
36°	Ø180	Ø42/70	
50°	Ø180	Ø42/70	

m	Ø (mm)	lux(center/side)
1	0.37	5938/3034
2	0.74	1485/758
3	1.10	660/337

m	Ø (mm)	lux(center/side)
1	0.47	4499/2225
2	0.93	1124/556
3	1.40	500/247

m	Ø (mm)	lux(center/side)
1	0.66	3010/1450
2	1.31	752/363
3	1.97	334/161

m	Ø (mm)	lux(center/side)
1	0.91	1842/859
2	1.82	461/215
3	2.72	205/95

- 18360W-827C-015-019
- 18360D-827C-015-019
- 18363W-827C-015-019
- 18363D-827C-015-019
- 18360W-830C-015-019
- 18360D-830C-015-019
- 18363W-830C-015-019
- 18363D-830C-015-019
- 18360W-840C-015-019
- 18360D-840C-015-019
- 18363W-840C-015-019
- 18363D-840C-015-019
- 18360W-827C-015-025
- 18360D-827C-015-025
- 18363W-827C-015-025
- 18363D-827C-015-025
- 18360W-830C-015-025
- 18360D-830C-015-025
- 18363W-830C-015-025
- 18363D-830C-015-025
- 18360W-840C-015-025
- 18360D-840C-015-025
- 18363W-840C-015-025
- 18363D-840C-015-025
- 18360W-827C-015-036
- 18360D-827C-015-036
- 18363W-827C-015-036
- 18363D-827C-015-036
- 18360W-830C-015-036
- 18360D-830C-015-036
- 18363W-830C-015-036
- 18363D-830C-015-036
- 18360W-840C-015-036
- 18360D-840C-015-036
- 18363W-840C-015-036
- 18363D-840C-015-036
- 18360W-827C-015-050
- 18360D-827C-015-050
- 18363W-827C-015-050
- 18363D-827C-015-050
- 18360W-830C-015-050
- 18360D-830C-015-050
- 18363W-830C-015-050
- 18363D-830C-015-050
- 18360W-840C-015-050
- 18360D-840C-015-050
- 18363W-840C-015-050
- 18363D-840C-015-050


Track Option

For MODEL no. 18360  
Standard Track (ON/OFF)




GLOBAL Trac Pro

Standard or recessed mounting version available.  
For the three-circuit track system.

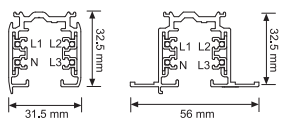

For MODEL no. 18363  
Control Track (1-10V)



GLOBAL Trac Control

For the three-circuit track for control system. (1-10V)

