

White




- **Housing**
The design of the outer case and the internal heat sink combination to induce forced convection transfer for excellent heat dissipation.
- **Reflector**
Black NGR finish.
- **Mounting Track**
Standard or recessed mounting version available.
For the three-circuit track system.

Black




Standard Track (ON/OFF)

Dimension W90 X L230 X H223
 Power Consumption(SMPS included) 20W
 Operating Voltage AC100-240V
 Material AL, PC
 Weight 1.85kg

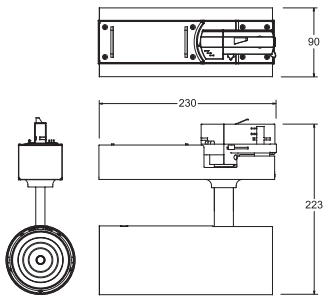


Control Track (1-10V, DALI)

Dimension W90 X L242 X H223
 Power Consumption(SMPS included) 20W
 Operating Voltage AC100-240V
 Material AL, PC
 Weight 1.85kg

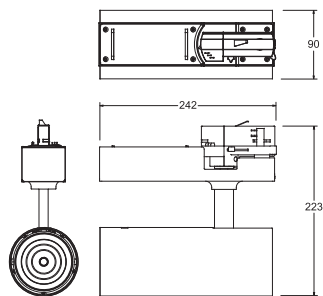


MODEL NO.	CONTROL	POWER CONSUMPTION	LAMP LUMINOUS(lm)	LOR	COLOR RENDERING INDEX(RA)	COLOR TEMPERATURE(K)	BEAM ANGLE	BODY COLOR	REFLECTOR FINISH
18510W-827C-020-012	○	20W	2250	0.82	80	2700	12	White	Black
18510D-827C-020-012	○	20W	2250	0.82	80	2700	12	Black	Black
18510W-827C-020-015	○	20W	2250	0.78	80	2700	15	White	Black
18510D-827C-020-015	○	20W	2250	0.78	80	2700	15	Black	Black
18510W-827C-020-030	○	20W	2250	0.76	80	2700	30	White	Black
18510D-827C-020-030	○	20W	2250	0.76	80	2700	30	Black	Black
18510W-827C-020-040	○	20W	2250	0.76	80	2700	40	White	Black
18510D-827C-020-040	○	20W	2250	0.76	80	2700	40	Black	Black
18513W-827C-020-012	○	20W	2250	0.82	80	2700	12	White	Black
18513D-827C-020-012	○	20W	2250	0.82	80	2700	12	Black	Black
18513W-827C-020-015	○	20W	2250	0.78	80	2700	15	White	Black
18513D-827C-020-015	○	20W	2250	0.78	80	2700	15	Black	Black
18513W-827C-020-030	○	20W	2250	0.76	80	2700	30	White	Black
18513D-827C-020-030	○	20W	2250	0.76	80	2700	30	Black	Black
18513W-827C-020-040	○	20W	2250	0.76	80	2700	40	White	Black
18513D-827C-020-040	○	20W	2250	0.76	80	2700	40	Black	Black
18510W-830C-020-012	○	20W	2250	0.82	80	3000	12	White	Black
18510D-830C-020-012	○	20W	2250	0.82	80	3000	12	Black	Black
18510W-830C-020-015	○	20W	2250	0.78	80	3000	15	White	Black
18510D-830C-020-015	○	20W	2250	0.78	80	3000	15	Black	Black
18510W-830C-020-030	○	20W	2250	0.76	80	3000	30	White	Black
18510D-830C-020-030	○	20W	2250	0.76	80	3000	30	Black	Black
18510W-830C-020-040	○	20W	2250	0.76	80	3000	40	White	Black
18510D-830C-020-040	○	20W	2250	0.76	80	3000	40	Black	Black
18513W-830C-020-012	○	20W	2250	0.82	80	3000	12	White	Black
18513D-830C-020-012	○	20W	2250	0.82	80	3000	12	Black	Black
18513W-830C-020-015	○	20W	2250	0.78	80	3000	15	White	Black
18513D-830C-020-015	○	20W	2250	0.78	80	3000	15	Black	Black
18513W-830C-020-030	○	20W	2250	0.76	80	3000	30	White	Black
18513D-830C-020-030	○	20W	2250	0.76	80	3000	30	Black	Black
18513W-830C-020-040	○	20W	2250	0.76	80	3000	40	White	Black
18513D-830C-020-040	○	20W	2250	0.76	80	3000	40	Black	Black
18510W-840C-020-012	○	20W	2250	0.82	80	4000	12	White	Black
18510D-840C-020-012	○	20W	2250	0.82	80	4000	12	Black	Black
18510W-840C-020-015	○	20W	2250	0.78	80	4000	15	White	Black
18510D-840C-020-015	○	20W	2250	0.78	80	4000	15	Black	Black
18510W-840C-020-030	○	20W	2250	0.76	80	4000	30	White	Black
18510D-840C-020-030	○	20W	2250	0.76	80	4000	30	Black	Black
18510W-840C-020-040	○	20W	2250	0.76	80	4000	40	White	Black
18510D-840C-020-040	○	20W	2250	0.76	80	4000	40	Black	Black
18513W-840C-020-012	○	20W	2250	0.82	80	4000	12	White	Black
18513D-840C-020-012	○	20W	2250	0.82	80	4000	12	Black	Black
18513W-840C-020-015	○	20W	2250	0.78	80	4000	15	White	Black
18513D-840C-020-015	○	20W	2250	0.78	80	4000	15	Black	Black
18513W-840C-020-030	○	20W	2250	0.76	80	4000	30	White	Black
18513D-840C-020-030	○	20W	2250	0.76	80	4000	30	Black	Black
18513W-840C-020-040	○	20W	2250	0.76	80	4000	40	White	Black
18513D-840C-020-040	○	20W	2250	0.76	80	4000	40	Black	Black

Standard (ON/OFF) ○ Control System (1-10V, DALI) ○

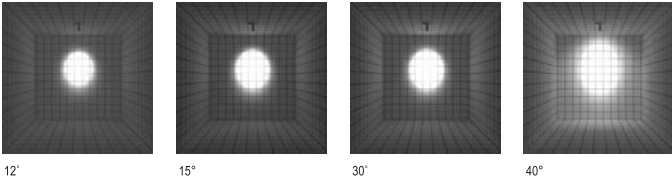

12° 15° 30° 40°

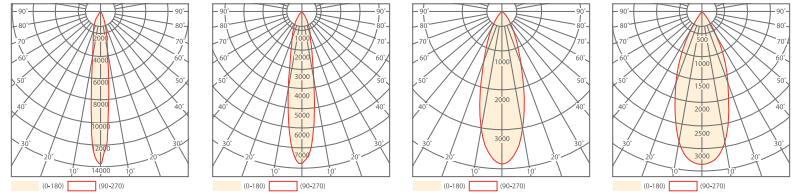

	12°	15°	30°	40°
	Ø(m)	Ø(m)	Ø(m)	Ø(m)
	lux(center/side)	lux(center/side)	lux(center/side)	lux(center/side)
1 m	0.22	0.35	0.58	0.73
2 m	0.45	0.70	1.16	1.46
3 m	0.67	1.05	1.75	2.19

- | | | | |
|---------------------|---------------------|---------------------|---------------------|
| 18510W-827C-020-012 | 18510W-827C-020-015 | 18510W-827C-020-030 | 18510W-827C-020-040 |
| 18510D-827C-020-012 | 18510D-827C-020-015 | 18510D-827C-020-030 | 18510D-827C-020-040 |
| 18513W-827C-020-012 | 18513W-827C-020-015 | 18513W-827C-020-030 | 18513W-827C-020-040 |
| 18513D-827C-020-012 | 18513D-827C-020-015 | 18513D-827C-020-030 | 18513D-827C-020-040 |
| 18510W-830C-020-012 | 18510W-830C-020-015 | 18510W-830C-020-030 | 18510W-830C-020-040 |
| 18510D-830C-020-012 | 18510D-830C-020-015 | 18510D-830C-020-030 | 18510D-830C-020-040 |
| 18513W-830C-020-012 | 18513W-830C-020-015 | 18513W-830C-020-030 | 18513W-830C-020-040 |
| 18513D-830C-020-012 | 18513D-830C-020-015 | 18513D-830C-020-030 | 18513D-830C-020-040 |
| 18510W-840C-020-012 | 18510W-840C-020-015 | 18510W-840C-020-030 | 18510W-840C-020-040 |
| 18510D-840C-020-012 | 18510D-840C-020-015 | 18510D-840C-020-030 | 18510D-840C-020-040 |
| 18513W-840C-020-012 | 18513W-840C-020-015 | 18513W-840C-020-030 | 18513W-840C-020-040 |
| 18513D-840C-020-012 | 18513D-840C-020-015 | 18513D-840C-020-030 | 18513D-840C-020-040 |


Track Option

For MODEL no. 18510
Standard Track (ON/OFF)



GLOBAL Trac Pro

Standard or recessed mounting version available.
For the three-circuit track system.

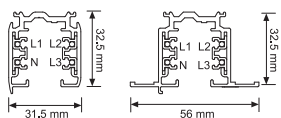


For MODEL no. 18513
Control Track (1-10V, DALI)



GLOBAL Trac Control

For the three-circuit track for control system. (1-10V, DALI)



White



- **Housing**
The design of the outer case and the internal heat sink combination to induce forced convection transfer for excellent heat dissipation.
- **Reflector**
Black NGR finish.
- **Mounting Track**
Standard or recessed mounting version available.
For the three-circuit track system.


Black



Standard Track (ON/OFF)


Control Track (1-10V, DALI)

Dimension	W90 X L227 X H215
Power Consumption(SMPS included)	20W
Operating Voltage	AC100-240V
Material	AL, PC
Weight	1.70kg

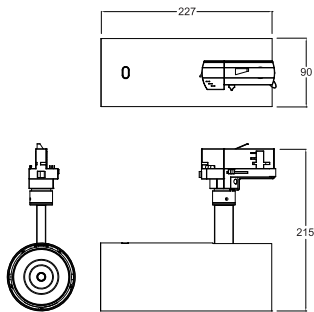


MODEL NO.	CONTROL	POWER CONSUMPTION	LAMP LUMINOUS(lm)	LOR	COLOR RENDERING INDEX(RA)	COLOR TEMPERATURE(K)	BEAM ANGLE	BODY COLOR	REFLECTOR FINISH
18560W-827C-020-012	○	20W	2250	0.82	80	2700	12	White	Black
18560D-827C-020-012	○	20W	2250	0.82	80	2700	12	Black	Black
18560W-827C-020-015	○	20W	2250	0.78	80	2700	15	White	Black
18560D-827C-020-015	○	20W	2250	0.78	80	2700	15	Black	Black
18560W-827C-020-030	○	20W	2250	0.76	80	2700	30	White	Black
18560D-827C-020-030	○	20W	2250	0.76	80	2700	30	Black	Black
18560W-827C-020-040	○	20W	2250	0.76	80	2700	40	White	Black
18560D-827C-020-040	○	20W	2250	0.76	80	2700	40	Black	Black
18563W-827C-020-012	○	20W	2250	0.82	80	2700	12	White	Black
18563D-827C-020-012	○	20W	2250	0.82	80	2700	12	Black	Black
18563W-827C-020-015	○	20W	2250	0.78	80	2700	15	White	Black
18563D-827C-020-015	○	20W	2250	0.78	80	2700	15	Black	Black
18563W-827C-020-030	○	20W	2250	0.76	80	2700	30	White	Black
18563D-827C-020-030	○	20W	2250	0.76	80	2700	30	Black	Black
18563W-827C-020-040	○	20W	2250	0.76	80	2700	40	White	Black
18563D-827C-020-040	○	20W	2250	0.76	80	2700	40	Black	Black
18560W-830C-020-012	○	20W	2250	0.82	80	3000	12	White	Black
18560D-830C-020-012	○	20W	2250	0.82	80	3000	12	Black	Black
18560W-830C-020-015	○	20W	2250	0.78	80	3000	15	White	Black
18560D-830C-020-015	○	20W	2250	0.78	80	3000	15	Black	Black
18560W-830C-020-030	○	20W	2250	0.76	80	3000	30	White	Black
18560D-830C-020-030	○	20W	2250	0.76	80	3000	30	Black	Black
18560W-830C-020-040	○	20W	2250	0.76	80	3000	40	White	Black
18560D-830C-020-040	○	20W	2250	0.76	80	3000	40	Black	Black
18563W-830C-020-012	○	20W	2250	0.82	80	3000	12	White	Black
18563D-830C-020-012	○	20W	2250	0.82	80	3000	12	Black	Black
18563W-830C-020-015	○	20W	2250	0.78	80	3000	15	White	Black
18563D-830C-020-015	○	20W	2250	0.78	80	3000	15	Black	Black
18563W-830C-020-030	○	20W	2250	0.76	80	3000	30	White	Black
18563D-830C-020-030	○	20W	2250	0.76	80	3000	30	Black	Black
18563W-830C-020-040	○	20W	2250	0.76	80	3000	40	White	Black
18563D-830C-020-040	○	20W	2250	0.76	80	3000	40	Black	Black
18560W-840C-020-012	○	20W	2250	0.82	80	4000	12	White	Black
18560D-840C-020-012	○	20W	2250	0.82	80	4000	12	Black	Black
18560W-840C-020-015	○	20W	2250	0.78	80	4000	15	White	Black
18560D-840C-020-015	○	20W	2250	0.78	80	4000	15	Black	Black
18560W-840C-020-030	○	20W	2250	0.76	80	4000	30	White	Black
18560D-840C-020-030	○	20W	2250	0.76	80	4000	30	Black	Black
18560W-840C-020-040	○	20W	2250	0.76	80	4000	40	White	Black
18560D-840C-020-040	○	20W	2250	0.76	80	4000	40	Black	Black
18563W-840C-020-012	○	20W	2250	0.82	80	4000	12	White	Black
18563D-840C-020-012	○	20W	2250	0.82	80	4000	12	Black	Black
18563W-840C-020-015	○	20W	2250	0.78	80	4000	15	White	Black
18563D-840C-020-015	○	20W	2250	0.78	80	4000	15	Black	Black
18563W-840C-020-030	○	20W	2250	0.76	80	4000	30	White	Black
18563D-840C-020-030	○	20W	2250	0.76	80	4000	30	Black	Black
18563W-840C-020-040	○	20W	2250	0.76	80	4000	40	White	Black
18563D-840C-020-040	○	20W	2250	0.76	80	4000	40	Black	Black

Standard (ON/OFF) ○ Control System (1-10V, DALI) ○

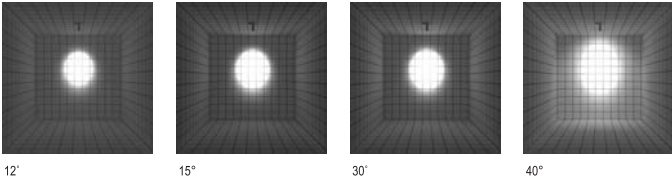

12° 15° 30° 40°

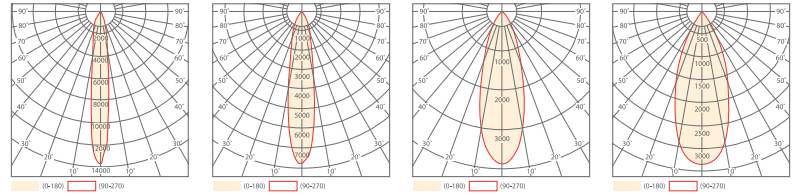

	12°	15°	30°	40°
	θ(m)	θ(m)	θ(m)	θ(m)
	lux(center/side)	lux(center/side)	lux(center/side)	lux(center/side)
1 m	0.22	0.35	0.58	0.73
2 m	0.45	0.70	1.16	1.46
3 m	0.67	1.05	1.75	2.19

- 18560W-827C-020-012
- 18560D-827C-020-012
- 18563W-827C-020-012
- 18563D-827C-020-012
- 18560W-830C-020-012
- 18560D-830C-020-012
- 18563W-830C-020-012
- 18563D-830C-020-012
- 18560W-840C-020-012
- 18560D-840C-020-012
- 18563W-840C-020-012
- 18563D-840C-020-012
- 18560W-827C-020-015
- 18560D-827C-020-015
- 18563W-827C-020-015
- 18563D-827C-020-015
- 18560W-830C-020-015
- 18560D-830C-020-015
- 18563W-830C-020-015
- 18563D-830C-020-015
- 18560W-840C-020-015
- 18560D-840C-020-015
- 18563W-840C-020-015
- 18563D-840C-020-015
- 18560W-827C-020-030
- 18560D-827C-020-030
- 18563W-827C-020-030
- 18563D-827C-020-030
- 18560W-830C-020-030
- 18560D-830C-020-030
- 18563W-830C-020-030
- 18563D-830C-020-030
- 18560W-840C-020-030
- 18560D-840C-020-030
- 18563W-840C-020-030
- 18563D-840C-020-030
- 18560W-827C-020-040
- 18560D-827C-020-040
- 18563W-827C-020-040
- 18563D-827C-020-040
- 18560W-830C-020-040
- 18560D-830C-020-040
- 18563W-830C-020-040
- 18563D-830C-020-040
- 18560W-840C-020-040
- 18560D-840C-020-040
- 18563W-840C-020-040
- 18563D-840C-020-040


Track Option

For MODEL no. 18560
Standard Track (ON/OFF)



GLOBAL Trac Pro

Standard or recessed mounting version available.
For the three-circuit track system.

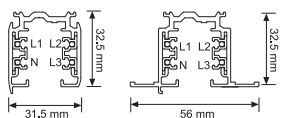


For MODEL no. 18563
Control Track (1-10V, DALI)



GLOBAL Trac Control

For the three-circuit track for control system. (1-10V, DALI)

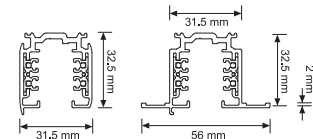

White



■ **Housing**
The design of the outer case and the internal heat sink combination to induce forced convection transfer for excellent heat dissipation.

■ **Reflector**
Black NGR finish.


■ **Mounting Track**
Standard or recessed mounting version available.
For the three-circuit track system.

Black




Standard Track (ON/OFF)

Dimension W90 X L230 X H223
 Power Consumption(SMPS included) 30W
 Operating Voltage AC100-240V
 Material AL, PC
 Weight 1.85kg

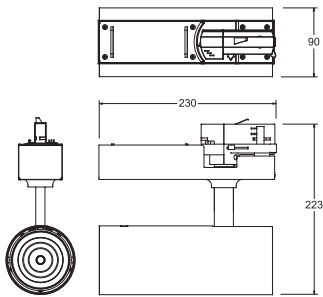


Control Track (1-10V, DALI)

Dimension W90 X L242 X H223
 Power Consumption(SMPS included) 30W
 Operating Voltage AC100-240V
 Material AL, PC
 Weight 1.85kg

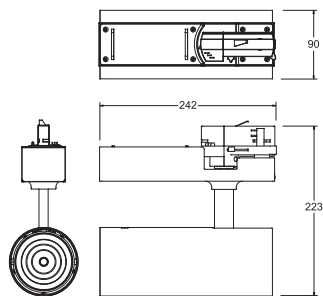


MODEL NO.	CONTROL	POWER CONSUMPTION	LAMP LUMINOUS(lm)	LOR	COLOR RENDERING INDEX(RA)	COLOR TEMPERATURE(K)	BEAM ANGLE	BODY COLOR	REFLECTOR FINISH
18520W-827C-030-012	○	30W	3150	0.79	80	2700	12	White	Black
18520D-827C-030-012	○	30W	3150	0.79	80	2700	12	Black	Black
18520W-827C-030-015	○	30W	3150	0.76	80	2700	15	White	Black
18520D-827C-030-015	○	30W	3150	0.76	80	2700	15	Black	Black
18520W-827C-030-030	○	30W	3150	0.74	80	2700	30	White	Black
18520D-827C-030-030	○	30W	3150	0.74	80	2700	30	Black	Black
18520W-827C-030-040	○	30W	3150	0.74	80	2700	40	White	Black
18520D-827C-030-040	○	30W	3150	0.74	80	2700	40	Black	Black
18523W-827C-030-012	○	30W	3150	0.79	80	2700	12	White	Black
18523D-827C-030-012	○	30W	3150	0.79	80	2700	12	Black	Black
18523W-827C-030-015	○	30W	3150	0.76	80	2700	15	White	Black
18523D-827C-030-015	○	30W	3150	0.76	80	2700	15	Black	Black
18523W-827C-030-030	○	30W	3150	0.74	80	2700	30	White	Black
18523D-827C-030-030	○	30W	3150	0.74	80	2700	30	Black	Black
18523W-827C-030-040	○	30W	3150	0.74	80	2700	40	White	Black
18523D-827C-030-040	○	30W	3150	0.74	80	2700	40	Black	Black
18520W-830C-030-012	○	30W	3150	0.79	80	3000	12	White	Black
18520D-830C-030-012	○	30W	3150	0.79	80	3000	12	Black	Black
18520W-830C-030-015	○	30W	3150	0.76	80	3000	15	White	Black
18520D-830C-030-015	○	30W	3150	0.76	80	3000	15	Black	Black
18520W-830C-030-030	○	30W	3150	0.74	80	3000	30	White	Black
18520D-830C-030-030	○	30W	3150	0.74	80	3000	30	Black	Black
18520W-830C-030-040	○	30W	3150	0.74	80	3000	40	White	Black
18520D-830C-030-040	○	30W	3150	0.74	80	3000	40	Black	Black
18523W-830C-030-012	○	30W	3150	0.79	80	3000	12	White	Black
18523D-830C-030-012	○	30W	3150	0.79	80	3000	12	Black	Black
18523W-830C-030-015	○	30W	3150	0.76	80	3000	15	White	Black
18523D-830C-030-015	○	30W	3150	0.76	80	3000	15	Black	Black
18523W-830C-030-030	○	30W	3150	0.74	80	3000	30	White	Black
18523D-830C-030-030	○	30W	3150	0.74	80	3000	30	Black	Black
18523W-830C-030-040	○	30W	3150	0.74	80	3000	40	White	Black
18523D-830C-030-040	○	30W	3150	0.74	80	3000	40	Black	Black
18520W-840C-030-012	○	30W	3150	0.79	80	4000	12	White	Black
18520D-840C-030-012	○	30W	3150	0.79	80	4000	12	Black	Black
18520W-840C-030-015	○	30W	3150	0.76	80	4000	15	White	Black
18520D-840C-030-015	○	30W	3150	0.76	80	4000	15	Black	Black
18520W-840C-030-030	○	30W	3150	0.74	80	4000	30	White	Black
18520D-840C-030-030	○	30W	3150	0.74	80	4000	30	Black	Black
18520W-840C-030-040	○	30W	3150	0.74	80	4000	40	White	Black
18520D-840C-030-040	○	30W	3150	0.74	80	4000	40	Black	Black
18523W-840C-030-012	○	30W	3150	0.79	80	4000	12	White	Black
18523D-840C-030-012	○	30W	3150	0.79	80	4000	12	Black	Black
18523W-840C-030-015	○	30W	3150	0.76	80	4000	15	White	Black
18523D-840C-030-015	○	30W	3150	0.76	80	4000	15	Black	Black
18523W-840C-030-030	○	30W	3150	0.74	80	4000	30	White	Black
18523D-840C-030-030	○	30W	3150	0.74	80	4000	30	Black	Black
18523W-840C-030-040	○	30W	3150	0.74	80	4000	40	White	Black
18523D-840C-030-040	○	30W	3150	0.74	80	4000	40	Black	Black

Standard (ON/OFF) ○ Control System (1-10V, DALI) ○

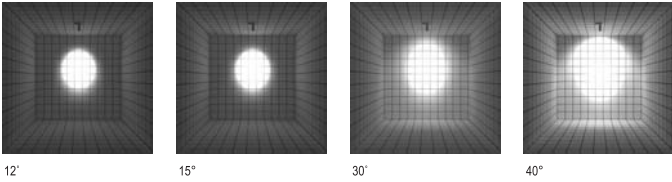

12° 15° 30° 40°

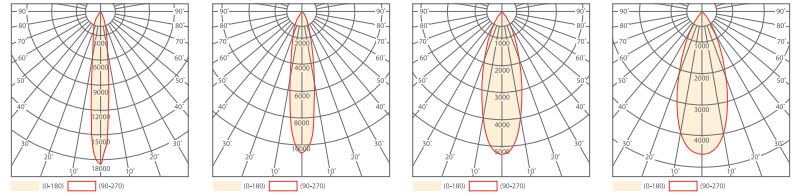

12°		15°		30°		40°	
m	Ø(m)	m	Ø(m)	m	Ø(m)	m	Ø(m)
1	0.22	0.35	0.58	0.73	1	1.16	1.46
2	0.45	0.70	1.16	1.46	2	2.32	2.92
3	0.67	1.05	1.75	2.19	3	3.48	4.38

- | | | | |
|---------------------|---------------------|---------------------|---------------------|
| 18520W-827C-030-012 | 18520W-827C-030-015 | 18520W-827C-030-030 | 18520W-827C-030-040 |
| 18520D-827C-030-012 | 18520D-827C-030-015 | 18520D-827C-030-030 | 18520D-827C-030-040 |
| 18523W-827C-030-012 | 18523W-827C-030-015 | 18523W-827C-030-030 | 18523W-827C-030-040 |
| 18523D-827C-030-012 | 18523D-827C-030-015 | 18523D-827C-030-030 | 18523D-827C-030-040 |
| 18520W-830C-030-012 | 18520W-830C-030-015 | 18520W-830C-030-030 | 18520W-830C-030-040 |
| 18520D-830C-030-012 | 18520D-830C-030-015 | 18520D-830C-030-030 | 18520D-830C-030-040 |
| 18523W-830C-030-012 | 18523W-830C-030-015 | 18523W-830C-030-030 | 18523W-830C-030-040 |
| 18523D-830C-030-012 | 18523D-830C-030-015 | 18523D-830C-030-030 | 18523D-830C-030-040 |
| 18520W-840C-030-012 | 18520W-840C-030-015 | 18520W-840C-030-030 | 18520W-840C-030-040 |
| 18520D-840C-030-012 | 18520D-840C-030-015 | 18520D-840C-030-030 | 18520D-840C-030-040 |
| 18523W-840C-030-012 | 18523W-840C-030-015 | 18523W-840C-030-030 | 18523W-840C-030-040 |
| 18523D-840C-030-012 | 18523D-840C-030-015 | 18523D-840C-030-030 | 18523D-840C-030-040 |


Track Option

For MODEL no. 18520
Standard Track (ON/OFF)



GLOBAL Trac Pro

Standard or recessed mounting version available.
For the three-circuit track system.




For MODEL no. 18523
Control Track (1-10V, DALI)



GLOBAL Trac Control

For the three-circuit track for control system. (1-10V, DALI)



White



- **Housing**
The design of the outer case and the internal heat sink combination to induce forced convection transfer for excellent heat dissipation.
- **Reflector**
Black NGR finish.
- **Mounting Track**
Standard or recessed mounting version available.
For the three-circuit track system.


Black



Standard Track (ON/OFF)


Control Track (1-10V, DALI)

Dimension	W90 X L227 X H215
Power Consumption(SMPS included)	30W
Operating Voltage	AC100-240V
Material	AL, PC
Weight	1.70kg

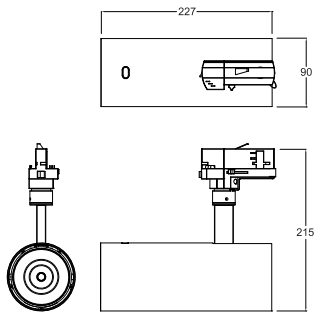

MODEL NO.	CONTROL	POWER CONSUMPTION	LAMP LUMINOUS(lm)	LOR	COLOR RENDERING INDEX(RA)	COLOR TEMPERATURE(K)	BEAM ANGLE	BODY COLOR	REFLECTOR FINISH
18570W-827C-030-012	○	30W	3150	0.79	80	2700	12	White	Black
18570D-827C-030-012	○	30W	3150	0.79	80	2700	12	Black	Black
18570W-827C-030-015	○	30W	3150	0.76	80	2700	15	White	Black
18570D-827C-030-015	○	30W	3150	0.76	80	2700	15	Black	Black
18570W-827C-030-030	○	30W	3150	0.74	80	2700	30	White	Black
18570D-827C-030-030	○	30W	3150	0.74	80	2700	30	Black	Black
18570W-827C-030-040	○	30W	3150	0.74	80	2700	40	White	Black
18570D-827C-030-040	○	30W	3150	0.74	80	2700	40	Black	Black
18573W-827C-030-012	○	30W	3150	0.79	80	2700	12	White	Black
18573D-827C-030-012	○	30W	3150	0.79	80	2700	12	Black	Black
18573W-827C-030-015	○	30W	3150	0.76	80	2700	15	White	Black
18573D-827C-030-015	○	30W	3150	0.76	80	2700	15	Black	Black
18573W-827C-030-030	○	30W	3150	0.74	80	2700	30	White	Black
18573D-827C-030-030	○	30W	3150	0.74	80	2700	30	Black	Black
18573W-827C-030-040	○	30W	3150	0.74	80	2700	40	White	Black
18573D-827C-030-040	○	30W	3150	0.74	80	2700	40	Black	Black
18570W-830C-030-012	○	30W	3150	0.79	80	3000	12	White	Black
18570D-830C-030-012	○	30W	3150	0.79	80	3000	12	Black	Black
18570W-830C-030-015	○	30W	3150	0.76	80	3000	15	White	Black
18570D-830C-030-015	○	30W	3150	0.76	80	3000	15	Black	Black
18570W-830C-030-030	○	30W	3150	0.74	80	3000	30	White	Black
18570D-830C-030-030	○	30W	3150	0.74	80	3000	30	Black	Black
18570W-830C-030-040	○	30W	3150	0.74	80	3000	40	White	Black
18570D-830C-030-040	○	30W	3150	0.74	80	3000	40	Black	Black
18573W-830C-030-012	○	30W	3150	0.79	80	3000	12	White	Black
18573D-830C-030-012	○	30W	3150	0.79	80	3000	12	Black	Black
18573W-830C-030-015	○	30W	3150	0.76	80	3000	15	White	Black
18573D-830C-030-015	○	30W	3150	0.76	80	3000	15	Black	Black
18573W-830C-030-030	○	30W	3150	0.74	80	3000	30	White	Black
18573D-830C-030-030	○	30W	3150	0.74	80	3000	30	Black	Black
18573W-830C-030-040	○	30W	3150	0.74	80	3000	40	White	Black
18573D-830C-030-040	○	30W	3150	0.74	80	3000	40	Black	Black
18570W-840C-030-012	○	30W	3150	0.79	80	4000	12	White	Black
18570D-840C-030-012	○	30W	3150	0.79	80	4000	12	Black	Black
18570W-840C-030-015	○	30W	3150	0.76	80	4000	15	White	Black
18570D-840C-030-015	○	30W	3150	0.76	80	4000	15	Black	Black
18570W-840C-030-030	○	30W	3150	0.74	80	4000	30	White	Black
18570D-840C-030-030	○	30W	3150	0.74	80	4000	30	Black	Black
18570W-840C-030-040	○	30W	3150	0.74	80	4000	40	White	Black
18570D-840C-030-040	○	30W	3150	0.74	80	4000	40	Black	Black
18573W-840C-030-012	○	30W	3150	0.79	80	4000	12	White	Black
18573D-840C-030-012	○	30W	3150	0.79	80	4000	12	Black	Black
18573W-840C-030-015	○	30W	3150	0.76	80	4000	15	White	Black
18573D-840C-030-015	○	30W	3150	0.76	80	4000	15	Black	Black
18573W-840C-030-030	○	30W	3150	0.74	80	4000	30	White	Black
18573D-840C-030-030	○	30W	3150	0.74	80	4000	30	Black	Black
18573W-840C-030-040	○	30W	3150	0.74	80	4000	40	White	Black
18573D-840C-030-040	○	30W	3150	0.74	80	4000	40	Black	Black

Standard (ON/OFF) ○ Control System (1-10V, DALI) ○

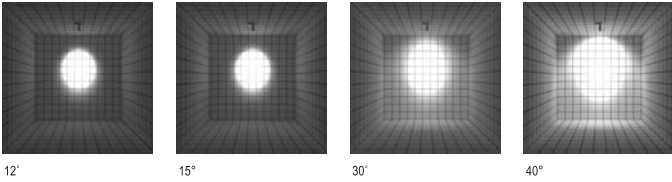


12°

15°

30°

40°

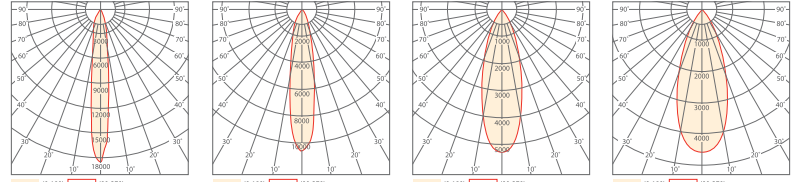

m	Ø(m)	lux(center/side)
1	0.22	18565/9754
2	0.45	4641/2438
3	0.67	2063/1084

m	Ø(m)	lux(center/side)
1	0.35	10673/5903
2	0.70	2668/1476
3	1.05	1186/656

m	Ø(m)	lux(center/side)
1	0.58	5276/2582
2	1.16	1319/646
3	1.75	586/287

m	Ø(m)	lux(center/side)
1	0.73	4550/2151
2	1.46	1140/538
3	2.19	507/239

- 18570W-827C-030-012
- 18570D-827C-030-012
- 18573W-827C-030-012
- 18573D-827C-030-012
- 18570W-830C-030-012
- 18570D-830C-030-012
- 18573W-830C-030-012
- 18573D-830C-030-012
- 18570W-840C-030-012
- 18570D-840C-030-012
- 18573W-840C-030-012
- 18573D-840C-030-012

- 18570W-827C-030-015
- 18570D-827C-030-015
- 18573W-827C-030-015
- 18573D-827C-030-015
- 18570W-830C-030-015
- 18570D-830C-030-015
- 18573W-830C-030-015
- 18573D-830C-030-015
- 18570W-840C-030-015
- 18570D-840C-030-015
- 18573W-840C-030-015
- 18573D-840C-030-015

- 18570W-827C-030-030
- 18570D-827C-030-030
- 18573W-827C-030-030
- 18573D-827C-030-030
- 18570W-830C-030-030
- 18570D-830C-030-030
- 18573W-830C-030-030
- 18573D-830C-030-030
- 18570W-840C-030-030
- 18570D-840C-030-030
- 18573W-840C-030-030
- 18573D-840C-030-030

- 18570W-827C-030-040
- 18570D-827C-030-040
- 18573W-827C-030-040
- 18573D-827C-030-040
- 18570W-830C-030-040
- 18570D-830C-030-040
- 18573W-830C-030-040
- 18573D-830C-030-040
- 18570W-840C-030-040
- 18570D-840C-030-040
- 18573W-840C-030-040
- 18573D-840C-030-040


Track Option

For MODEL no. 18570
Standard Track (ON/OFF)



GLOBAL Trac Pro

Standard or recessed mounting version available.
For the three-circuit track system.



For MODEL no. 18573
Control Track (1-10V, DALI)



GLOBAL Trac Control

For the three-circuit track for control system. (1-10V, DALI)

