RM-10-HC 08/10/20 Item # 13546

WxDxH 25" x 22.75" x 54.5"















One Coelien

Dimensions / Capacity	One Section RM-10-HC
Interior Storage Capacity (CF)	8.74 ft³
Overall Width x Depth	25" x 22.75"
Height	54.5"
Depth with Door Open	46.7"
Adjustable Shelves	3
Shelf Dimensions (W x D)	21" x 17.5"
Crated Shipping Weight	230 lbs.
Crated Width x Depth x Height	30" x 28" x 60"
Electrical / Refrigeration	One Section
Lieutiivai / Neiliyelativii	RM-10-HC
Voltage	115/60/1
-	
Voltage	115/60/1
Voltage HACR Breaker	115/60/1 15.0 Amps
Voltage HACR Breaker Electrical Connection (NEMA)	115/60/1 15.0 Amps 5-15P 🕦
Voltage HACR Breaker Electrical Connection (NEMA) Voltage Range	115/60/1 15.0 Amps 5-15P ••• 104-126
Voltage HACR Breaker Electrical Connection (NEMA) Voltage Range Ambient Temp. Range	115/60/1 15.0 Amps 5-15P 104-126 60° to 86°F
Voltage HACR Breaker Electrical Connection (NEMA) Voltage Range Ambient Temp. Range Control Setpoint Range	115/60/1 15.0 Amps 5-15P •• 104-126 60° to 86°F 28° to 40°F
Voltage HACR Breaker Electrical Connection (NEMA) Voltage Range Ambient Temp. Range Control Setpoint Range Amperage	115/60/1 15.0 Amps 5-15P 104-126 60° to 86°F 28° to 40°F 1.8

Options

☐ Organizer shelf (HS-5446)	☐ 4" Casters (HS-5288)
☐ Price tag holder (HS-5290)	☐ 2.25" Casters (HS-5037)
☐ Epoxy Shelf (HS-5447)	

Warranty

* 3 Year - Parts and Labor on entire machine. 5 Year - Parts on Compressor Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #:	_
Project:	_
Qty:	_
AIA#:	_

Features

- Curved vertical corners with silver aluminum exterior provide enhanced product display
- Forced air evaporator for quick temperature pull down
- Energy saving hot gas loop on front edge of cabinet helps prevent condensation
- Listed under NSF/ANSI Standard 7 for the storage and/or display of packaged or bottled products.
- · Large glass door is energy efficient Low-E multi pane
- Door is mounted on heavy duty hinges with selfclosing mechanism
- Energy efficient vertical LED interior lights illuminate products on display
- Silver painted aluminum exterior with NSF approved white steel interior and stainless steel floor
- Environmentally friendly CFC-Free Polyurethane insulation with cyclopentane blowing agent.
- (3) white epoxy coated shelves per section with product stops are standard
- Stackable (two units high) to conserve warehouse floor space
- Stainless steel shelf clips adjustable in ½" increments on anodized aluminum supports
- Refrigerant flow is controlled with a capillary tube
- 8 Foot cord and plug
- · 2 inch leveling legs standard


Capacity:


20 oz. bottles: 168 12 oz. bottles: 384

Container Qty: 54




FRONT VIEW SIDE VIEW

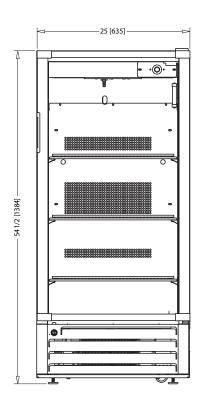

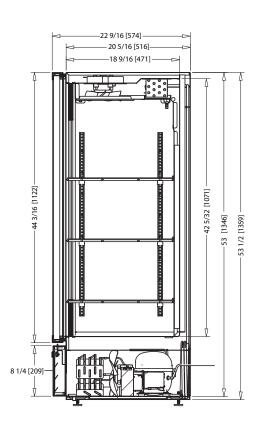

PLAN VIEW HEADER DIMS





Graphic Requirements:

- 360 dpi resolution. Scale 1=1
- Colors for CMYK process
- Image with 1/4" of excess by side
- Graphics must be saved in photoshop (with layers)
 - (or your sign company file type requirements)
- Include a full color print out

Material Requirements:

• 3M exterior grade UV resistant vinyl adhesive

Note: Texts and important parts of the image should be within the visible area. The visible area is illustrated by dotted lines when it applies.