

delta

Single Bike Wall Mount Rack

Assembly instructions

- 1 Locate stud beneath wallboard and mark position of desired height to hang bike.
- 2 Use back plate to mark positions for drilling pilot holes for mounting screws. Drill holes.



IMPORTANT SAFETY NOTE

Beware of drilling into electrical wire or pipes within wall!

Use spirit level to ensure plate is horizontal when drilling holes for mounting screws.

(for Model RS4007 (with Tire Tray))


- 3 Hang bike on hook to determine lower plate height.
- 4 Position bottom plate in line with top plate, remove backing tape and adhere to wall.

Tools Required

Phillips Head
Screwdriver





Hand Drill 1/8"
(3mm)



Spirit Level



Way of locating studs within the wall
(see hardware store for advice)

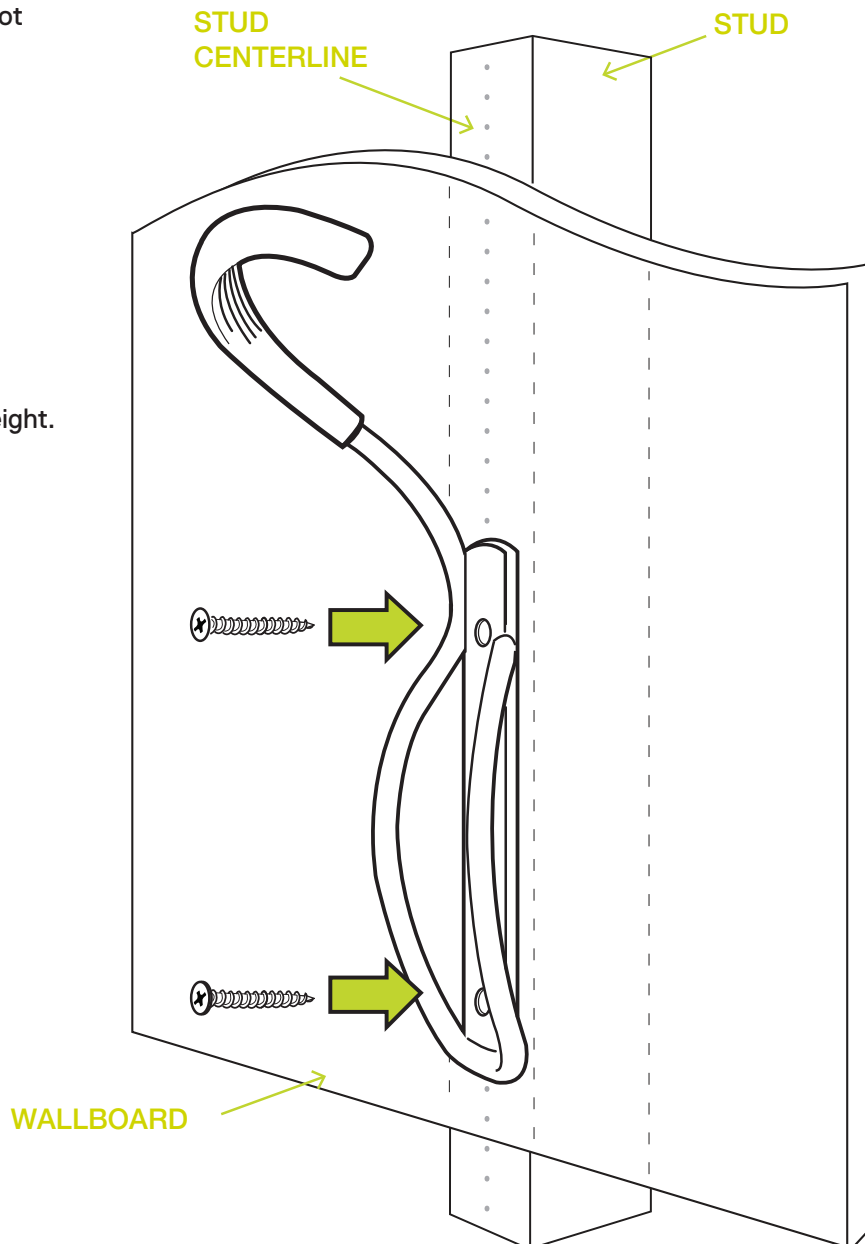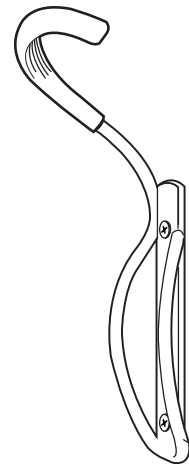


WARNING

Do not exceed maximum total weight limit of 18kg/40lbs. Incorrect wall mounting could result in items falling and injury to persons. Avoid mounting in a position where personal injury could result from walking into protruding rack. Do not allow children to play or hang from Rack.

delta


Single Bike Wall Mount Rack

Wall Elevation Dimension

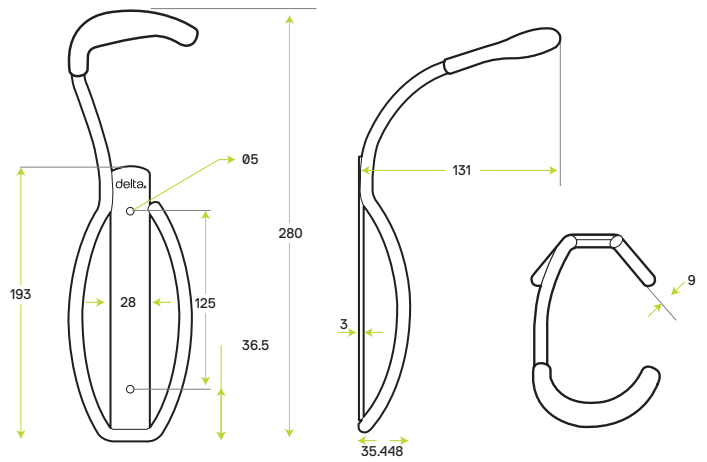


OPTION A

All bicycles hanging from front wheel
(most common application)

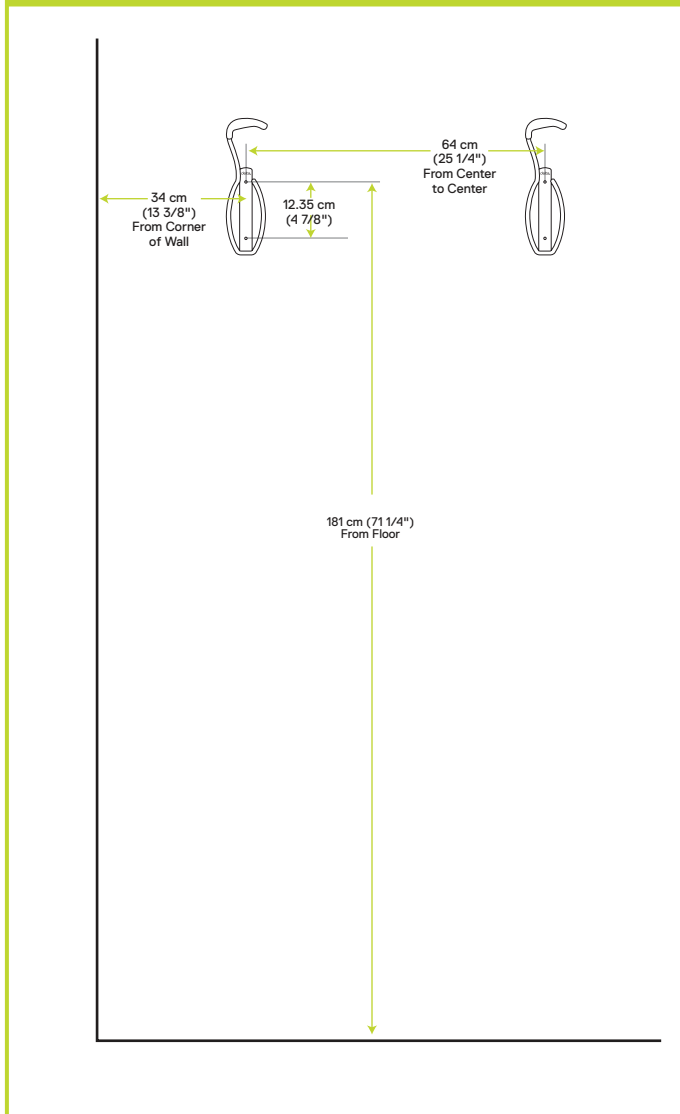

OPTION B

Alternate hanging of bicycles
from front wheel to back wheel
(for maximum number of bicycles on a wall)

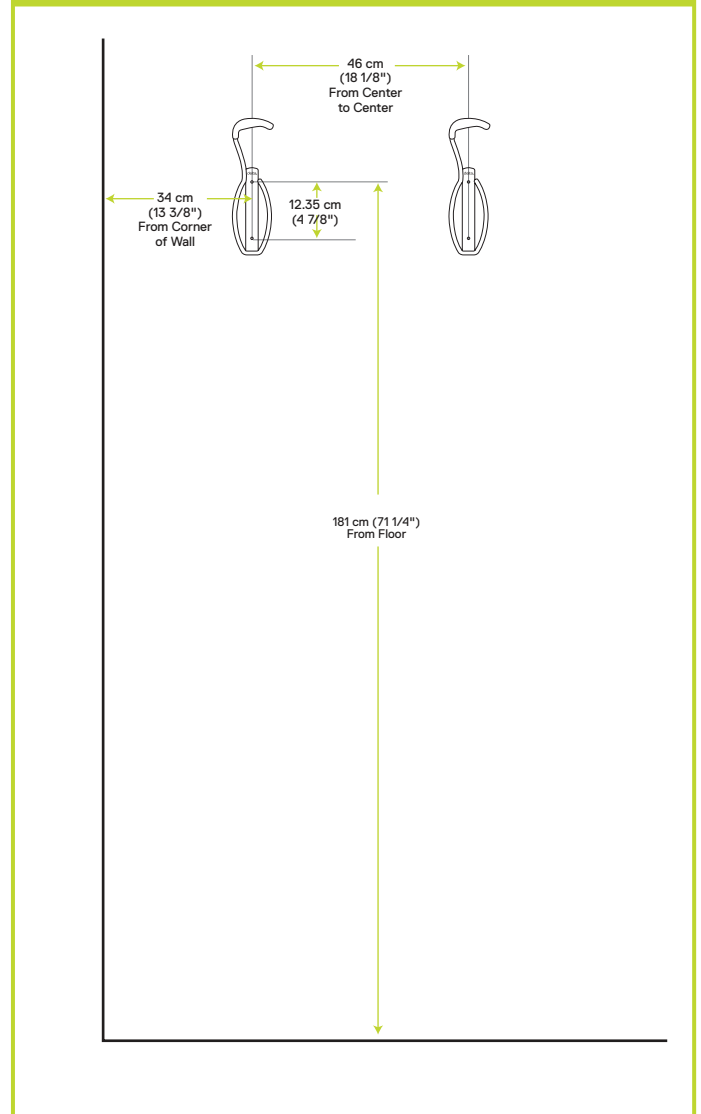

WARNING

Do not exceed maximum total weight limit of 18kg/40lbs. Incorrect wall mounting could result in items falling and injury to persons. Avoid mounting in a position where personal injury could result from walking into protruding rack. Do not allow children to play or hang from Rack.