
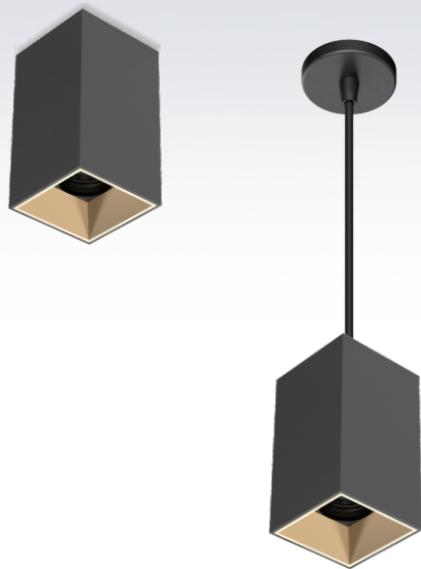




Quickinfo

GENERAL

surface mounted / suspension
square

LED

COB/SMD LED module
2700K, 3000K, 4000K
CRI > 80, CRI > 90
Binning < 3-Step MacAdam

ESTIMATED LED LIFETIME

L80 / 50.000h

OPTICAL

direct illumination
beam angle 18°, 24°, 30°, 55°

PHYSICAL

aluminium
wet painting
secondary reflector plastic

Order options

SYSTEM POWER

9W
10W
13W

COLOUR TEMPERATURE

2700K
3000K
4000K

COLOUR RENDERING INDEX

CRI 80
CRI 90

ELECTRICAL

non DIM
phase DIM
1-10V
DALI

LENS



FRONT RING ACCESSORY



Honeycomb mesh

SECONDARY REFLECTOR



Specular

Chrome Black White




Matt

Black

Gold

COLOR




Black

White


Silver

Brick-68S1



Light distribution for 3000K

9 W 600lm-650lm

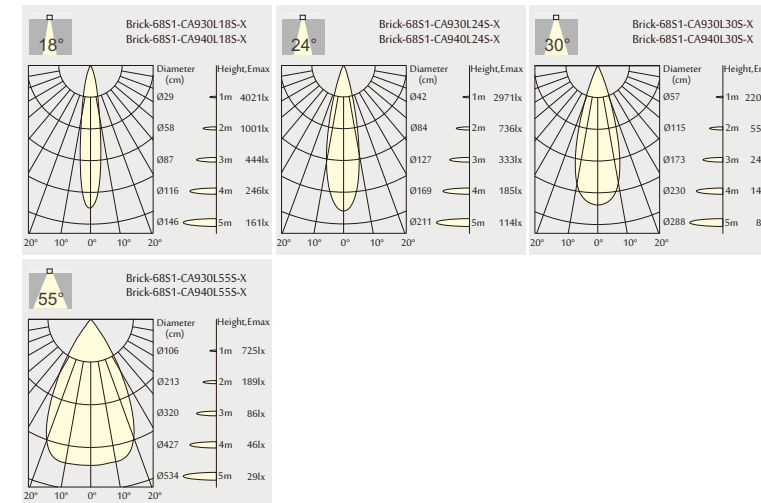

Order Information

Brick-68S1-9W 600-650 Lm MODELS (White trim, CITIZEN LED, Specular reflector)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
Brick-68S1-CA930L18S-X	850 lm	600 lm	31 V	250 mA	7.5W	9W	90	3000K	18°
Brick-68S1-CA940L18S-X	900 lm	650 lm	31 V	250 mA	7.5W	9W	90	4000K	18°
Brick-68S1-CA930L24S-X	850 lm	600 lm	31 V	250 mA	7.5W	9W	90	3000K	24°
Brick-68S1-CA940L24S-X	900 lm	650 lm	31 V	250 mA	7.5W	9W	90	4000K	24°
Brick-68S1-CA930L30S-X	850 lm	600 lm	31 V	250 mA	7.5W	9W	90	3000K	30°
Brick-68S1-CA940L30S-X	900 lm	650 lm	31 V	250 mA	7.5W	9W	90	4000K	30°
Brick-68S1-CA930L55S-X	850 lm	600 lm	31 V	250 mA	7.5W	9W	90	3000K	55°
Brick-68S1-CA940L55S-X	900 lm	650 lm	31 V	250 mA	7.5W	9W	90	4000K	55°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)


Brick-68S1

3000K
(Standard)



Light distribution for 3000K

13 W 800lm-850lm

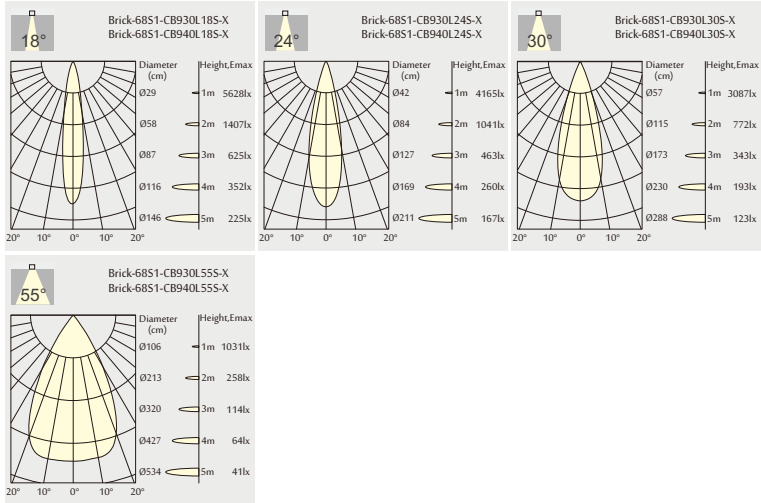

Order Information


Brick-68S1-13W 800-850 Lm MODELS (White trim, CITIZEN LED, Specular reflector)

Code	LED output	Module output	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
Brick-68S1-CB930L18S-X	1100 lm	800 lm	31 V	350 mA	11W	13W	90	3000K	18°
Brick-68S1-CB940L18S-X	1200 lm	850 lm	31 V	350 mA	11W	13W	90	4000K	18°
Brick-68S1-CB930L24S-X	1100 lm	800 lm	31 V	350 mA	11W	13W	90	3000K	24°
Brick-68S1-CB940L24S-X	1200 lm	850 lm	31 V	350 mA	11W	13W	90	4000K	24°
Brick-68S1-CB930L30S-X	1100 lm	800 lm	31 V	350 mA	11W	13W	90	3000K	30°
Brick-68S1-CB940L30S-X	1200 lm	850 lm	31 V	350 mA	11W	13W	90	4000K	30°
Brick-68S1-CB930L55S-X	1100 lm	800 lm	31 V	350 mA	11W	13W	90	3000K	55°
Brick-68S1-CB940L55S-X	1200 lm	850 lm	31 V	350 mA	11W	13W	90	4000K	55°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

Light distribution for 3000K

8.5 W 350lm-380lm Narrow Spot Beam Version



Order Information

Brick-68S1 350-380 Lm MODELS (White trim, CREE LED, Specular reflector)

Code	LED output	Module output	CD	LED Voltage	LED Current	LED Power	System Power	CRI	CCT	BEAM
Brick-68S1-EA930L10S-X	600 lm	350 lm	5268 cd	12 V	700mA	8.5 W	10 W	90	3000K	10°
Brick-68S1-EA940L10S-X	650 lm	380 lm	5385 cd	12 V	700mA	8.5 W	10 W	90	4000K	10°

Remark: X=F (ON-OFF) X=P (Phase Dim) X=A (1-10V Dim) X=D (DALI Dim) X=N (Without Driver)

