

48V SYSTEM
SIX 48V



		+RE	P	CCT	Beam	I	Flux	LOR
SIX L 48V	A329-0- ∅ -10-	WT NT -S	24,5W	2700K	17°	700mA	2850Lm	93%
	A329-0- ∅ -11-	WT NT -S	24,5W	3000K	17°	700mA	2950Lm	93%
	A329-0- ∅ -12-	WT NT -S	24,5W	4000K	17°	700mA	3000Lm	93%
	A329-0- ∅ -30-	WT NT -S	24,5W	2700K	26°	700mA	2850Lm	93%
	A329-0- ∅ -31-	WT NT -S	24,5W	3000K	26°	700mA	2950Lm	93%
	A329-0- ∅ -32-	WT NT -S	24,5W	4000K	26°	700mA	3000Lm	93%
	A329-0- ∅ -20-	WT NT -S	24,5W	2700K	34°	700mA	2850Lm	90%
	A329-0- ∅ -21-	WT NT -S	24,5W	3000K	34°	700mA	2950Lm	90%
	A329-0- ∅ -22-	WT NT -S	24,5W	4000K	34°	700mA	3000Lm	90%

LED | 48 V | IP20 | CRI>90 | L80B10 >60.000h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V OPTIONS RE

360°

310°

17° / 26° / 34°


∅	*OPTIONS
1	No DIM
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
∅	Track 48V	A3290110WT
-S	Track 48V Short	A3290110WT-S

ACCESSORY

SIX L High Chromatic LED**

NOT SOLD SEPARATELY

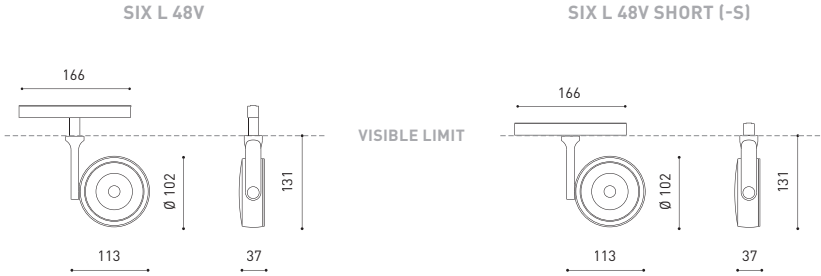

COLOUR | WT RAL 9016 | NT RAL 9005 | MATERIAL | AL | PC | » 48

** ACCESSORY & COLOURS AFFECT THE LIGHTING PARAMETERS
*RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT





							+RE	P	CCT	Beam	I	Flux	LOR
SIX M 48V	A330-0-	∅	-10-	WT	NT	-S	17W	2700K	19°	500mA	2050Lm	93%	
	A330-0-	∅	-11-	WT	NT	-S	17W	3000K	19°	500mA	2130Lm	93%	
	A330-0-	∅	-12-	WT	NT	-S	17W	4000K	19°	500mA	2160Lm	93%	
	A330-0-	∅	-20-	WT	NT	-S	17W	2700K	28°	500mA	2050Lm	91%	
	A330-0-	∅	-21-	WT	NT	-S	17W	3000K	28°	500mA	2130Lm	91%	
	A330-0-	∅	-22-	WT	NT	-S	17W	4000K	28°	500mA	2160Lm	91%	
	A330-0-	∅	-30-	WT	NT	-S	17W	2700K	38°	500mA	2050Lm	93%	
	A330-0-	∅	-31-	WT	NT	-S	17W	3000K	38°	500mA	2130Lm	93%	
	A330-0-	∅	-32-	WT	NT	-S	17W	4000K	38°	500mA	2160Lm	93%	

LED

48 V

01

CE

III

IP20

CRI>90

L80B10
> 60.000h

MacAdam
Step 2

OPTIONS*


INCL

TRACK 48V
OPTIONS RE

360°

310°

19° / 28° / 38°

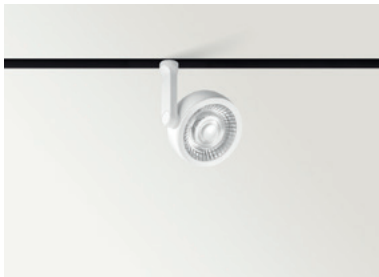

							+RE	P	CCT	Beam	I	Flux	LOR
SIX S 48V	A333-0-	∅ -10-	WT	NT	-S		8,5W	2700K	17°	500mA	1030Lm	86%	
	A333-0-	∅ -11-	WT	NT	-S		8,5W	3000K	17°	500mA	1070Lm	86%	
	A333-0-	∅ -12-	WT	NT	-S		8,5W	4000K	17°	500mA	1100Lm	86%	
	A333-0-	∅ -20-	WT	NT	-S		8,5W	2700K	24°	500mA	1030Lm	84%	
	A333-0-	∅ -21-	WT	NT	-S		8,5W	3000K	24°	500mA	1070Lm	84%	
	A333-0-	∅ -22-	WT	NT	-S		8,5W	4000K	24°	500mA	1100Lm	84%	
	A333-0-	∅ -30-	WT	NT	-S		8,5W	2700K	34°	500mA	1030Lm	89%	
	A333-0-	∅ -31-	WT	NT	-S		8,5W	3000K	34°	500mA	1070Lm	89%	
	A333-0-	∅ -32-	WT	NT	-S		8,5W	4000K	34°	500mA	1100Lm	89%	

LED

48 V

01

CE

III

IP20

CRI>90

L80B10
> 60.000h

MacAdam
Step 2

OPTIONS*

INCL

TRACK 48V
OPTIONS RE

360°

310°

17° / 24° / 34°

ACCESSORIES


SIX M High Chromatic LED**

SIX S High Chromatic LED**

NOT SOLD SEPARATELY



∅	*OPTIONS	+RE	REF. ENDING	EXAMPLE
1	No DIM	∅	Track 48V	A3300110WT
2	DIM DALI	-S	Track 48V Short	A3300110WT-S

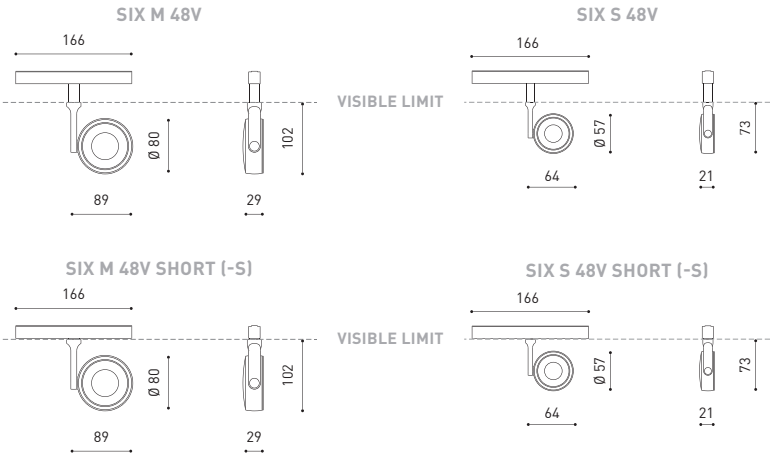

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 | MATERIAL | AL | PC |

** ACCESSORY & COLOURS AFFECT THE LIGHTING PARAMETERS
+RE >> THE PRODUCTS FOR THE *TRACK 48V SHORT*, ADD “-S” AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).



								+RE	P	CCT	Beam	I	Flux	LOR	
SIX XS 48V	A335-0-	∅	-10-		WT		NT		-S	4,5W	2700K	17°	500mA	470Lm	90%
	A335-0-	∅	-11-		WT		NT		-S	4,5W	3000K	17°	500mA	500Lm	90%
	A335-0-	∅	-12-		WT		NT		-S	4,5W	4000K	17°	500mA	530Lm	90%
	A335-0-	∅	-20-		WT		NT		-S	4,5W	2700K	23°	500mA	470Lm	86%
	A335-0-	∅	-21-		WT		NT		-S	4,5W	3000K	23°	500mA	500Lm	86%
	A335-0-	∅	-22-		WT		NT		-S	4,5W	4000K	23°	500mA	530Lm	86%
	A335-0-	∅	-30-		WT		NT		-S	4,5W	2700K	34°	500mA	470Lm	88%
	A335-0-	∅	-31-		WT		NT		-S	4,5W	3000K	34°	500mA	500Lm	88%
	A335-0-	∅	-32-		WT		NT		-S	4,5W	4000K	34°	500mA	530Lm	88%

LED

48 V

01

CE

III

IP20

CRI>90

L80B10
> 60.000h

MacAdam
Step 2

OPTIONS*

INCL

TRACK 48V
OPTIONS RE

360°

310°

17° / 23° / 34°



							+RE	P	CCT	Beam	I	Flux	LOR
SIX XS 48V Double	A335-1- ∅ -10- WT NT -S	9W	2700K	17°	500mA	2 X 470Lm	90%						
	A335-1- ∅ -11- WT NT -S	9W	3000K	17°	500mA	2 X 500Lm	90%						
	A335-1- ∅ -12- WT NT -S	9W	4000K	17°	500mA	2 X 530Lm	90%						
	A335-1- ∅ -20- WT NT -S	9W	2700K	23°	500mA	2 X 470Lm	86%						
	A335-1- ∅ -21- WT NT -S	9W	3000K	23°	500mA	2 X 500Lm	86%						
	A335-1- ∅ -22- WT NT -S	9W	4000K	23°	500mA	2 X 530Lm	86%						
	A335-1- ∅ -30- WT NT -S	9W	2700K	34°	500mA	2 X 470Lm	88%						
	A335-1- ∅ -31- WT NT -S	9W	3000K	34°	500mA	2 X 500Lm	88%						
	A335-1- ∅ -32- WT NT -S	9W	4000K	34°	500mA	2 X 530Lm	88%						

LED

48 V

01

CE

III

IP20

CRI>90

L80B10
> 60.000h

MacAdam
Step 2

OPTIONS*

INCL

TRACK 48V
OPTIONS RE

360°

310°

17° / 23° / 34°


ACCESSORY

SIX XS High Chromatic LED**

NOT SOLD SEPARATELY



∅	*OPTIONS	+RE	REF. ENDING	EXAMPLE
1	No DIM	∅	Track 48V	A3350110WT
2	DIM DALI	-S	Track 48V Short	A3350110WT-S

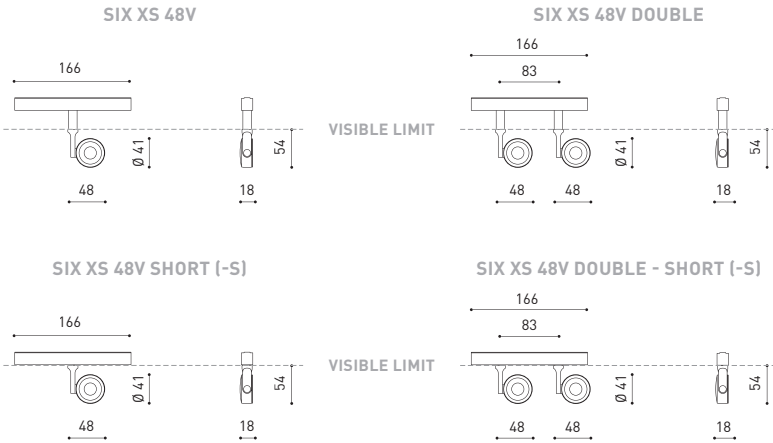

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 | MATERIAL | AL | PC |

** ACCESSORY & COLOURS AFFECT THE LIGHTING PARAMETERS
+RE >> THE PRODUCTS FOR THE *TRACK 48V SHORT*, ADD “-S” AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

48V SYSTEM

FIT 48V



								+RE	P	CCT	Beam	I	Flux	LOR	
FIT Ø50 48V	A346-0-	⊙	-10-		WT		NT		-S	12W	2700K	15°	1050mA	1040Lm	85%
	A346-0-	⊙	-11-		WT		NT		-S	12W	3000K	15°	1050mA	1120Lm	85%
	A346-0-	⊙	-20-		WT		NT		-S	12W	2700K	28°	1050mA	1040Lm	82%
	A346-0-	⊙	-21-		WT		NT		-S	12W	3000K	28°	1050mA	1120Lm	82%
	A346-0-	⊙	-30-		WT		NT		-S	12W	2700K	47°	1050mA	1040Lm	80%
	A346-0-	⊙	-31-		WT		NT		-S	12W	3000K	47°	1050mA	1120Lm	80%

LED

48 V

CE

III

IP20

CRI>90

L80B10
>60.000h

MacAdam
Step 2

OPTIONS*

INCL

TRACK 48V
OPTIONS RE

360°

90°

15°/28°/47°


Ø	*OPTIONS
1	No DIM
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
Ø	Track 48V	A3460110WT
-S	Track 48V Short	A3460110WT-S

ACCESSORY

FIT Ø50 Anti-glare Honeycomb Louver **	A346-00-00
--	------------

NOT SOLD SEPARATELY

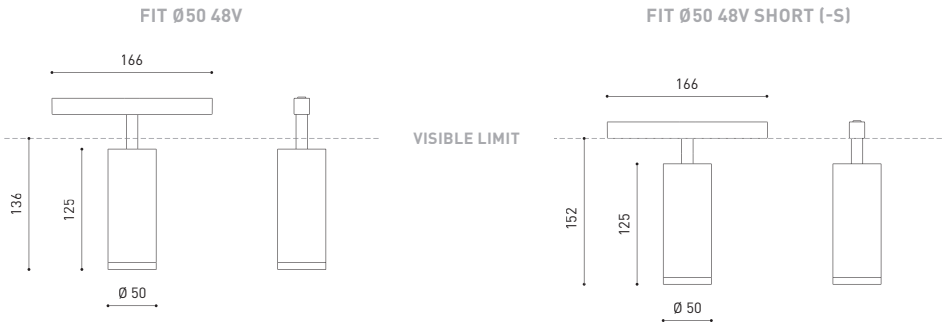

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 | MATERIAL | AL | PC | ⓘ » 48

** ACCESSORY AFFECTS THE LIGHTING PARAMETERS
+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT





ACCESSORY

FIT Ø35 Anti-glare Honeycomb Louver **

A345-00-00


NOT SOLD SEPARATELY



							+RE	P	CCT	Beam	I	Flux	LOR
FIT Ø35 48V	A345-0-	⊙	-10-	WT	NT	-S	5,5W	2700K	19°	500mA	590Lm	82%	
	A345-0-	⊙	-11-	WT	NT	-S	5,5W	3000K	19°	500mA	630Lm	82%	
	A345-0-	⊙	-20-	WT	NT	-S	5,5W	2700K	29°	500mA	590Lm	80%	
	A345-0-	⊙	-21-	WT	NT	-S	5,5W	3000K	29°	500mA	630Lm	80%	
	A345-0-	⊙	-30-	WT	NT	-S	5,5W	2700K	38°	500mA	590Lm	80%	
	A345-0-	⊙	-31-	WT	NT	-S	5,5W	3000K	38°	500mA	630Lm	80%	
LED 48 V CE III IP20 CRI>90 L80B10 >60.000 h							 MacAdam Step 2	 OPTIONS*	 INCL	 TRACK 48V OPTIONS RE	 360°	 90°	 19°/29°/38°


							+RE	P	CCT	Beam	I	Flux	LOR			
FIT Ø35 48V Double	A345-1-	Ⓢ	-10-		WT		NT		-S	11W	2700K	19°	500mA	2 x 590Lm	82%	
	A345-1-	Ⓢ	-11-		WT		NT		-S	11W	3000K	19°	500mA	2 x 630Lm	82%	
	A345-1-	Ⓢ	-20-		WT		NT		-S	11W	2700K	29°	500mA	2 x 590Lm	80%	
	A345-1-	Ⓢ	-21-		WT		NT		-S	11W	3000K	29°	500mA	2 x 630Lm	80%	
	A345-1-	Ⓢ	-30-		WT		NT		-S	11W	2700K	38°	500mA	2 x 590Lm	80%	
	A345-1-	Ⓢ	-31-		WT		NT		-S	11W	3000K	38°	500mA	2 x 630Lm	80%	
Ⓢ 48 V ⒸⒺ Ⓢ IP20 CRI>90 L80B10 >60.000 h										 MacAdam Step 2	 OPTIONS*	 INCL	 TRACK 48V OPTIONS RE	 360°	 90°	 19°/29°/38°

	*OPTIONS	+RE	REF. ENDING	EXAMPLE
1	No DIM		Track 48V	A3450110WT
2	DIM DALI	-S	Track 48V Short	A3450110WT-S

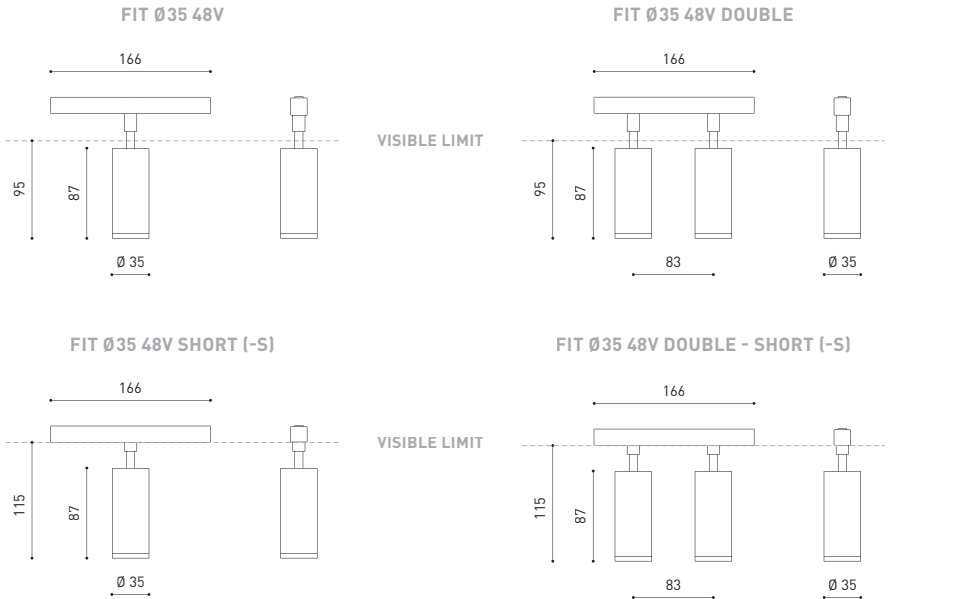

COLOUR | WT  RAL 9016 | NT  RAL 9005 | MATERIAL |  AL |  PC |  » 48


** ACCESSORY AFFECTS THE LIGHTING PARAMETERS
+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).  » PLEASE CONSULT

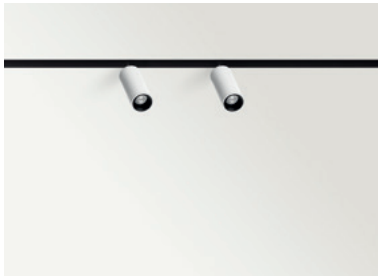

										+RE	P	CCT	Beam	I	Flux	LOR
FIT Ø20 48V	A344-0-  -10- WT NT -S										2,1W	2700K	12°	700mA	127Lm	87%
	A344-0-  -11- WT NT -S										2,1W	3000K	12°	700mA	150Lm	87%
	A344-0-  -20- WT NT -S										2,1W	2700K	30°	700mA	127Lm	88%
	A344-0-  -21- WT NT -S										2,1W	3000K	30°	700mA	150Lm	88%
	A344-0-  -30- WT NT -S										2,1W	2700K	54°	700mA	127Lm	81%
	A344-0-  -31- WT NT -S										2,1W	3000K	54°	700mA	150Lm	81%
 48 V   IP20 CRI>90 L80B10 >50.000 h  MacAdam Step 3  OPTIONS*  INCL  TRACK 48V OPTIONS RE  360°  90°  12°/30°/54°																

							+RE	P	CCT	Beam	I	Flux	LOR
FIT Ø20 48V Double	A344-1-	⊙	-10-	WT NT	-S		4,2W	2700K	12°	700mA	2 x 127Lm	87%	
	A344-1-	⊙	-11-	WT NT	-S		4,2W	3000K	12°	700mA	2 x 150Lm	87%	
	A344-1-	⊙	-20-	WT NT	-S		4,2W	2700K	30°	700mA	2 x 127Lm	88%	
	A344-1-	⊙	-21-	WT NT	-S		4,2W	3000K	30°	700mA	2 x 150Lm	88%	
	A344-1-	⊙	-30-	WT NT	-S		4,2W	2700K	54°	700mA	2 x 127Lm	81%	
	A344-1-	⊙	-31-	WT NT	-S		4,2W	3000K	54°	700mA	2 x 150Lm	81%	

	*OPTIONS	+RE	REF. ENDING	EXAMPLE
1	No DIM		Track 48V	A3440110WT
2	DIM DALI	-S	Track 48V Short	A3440110WT-S

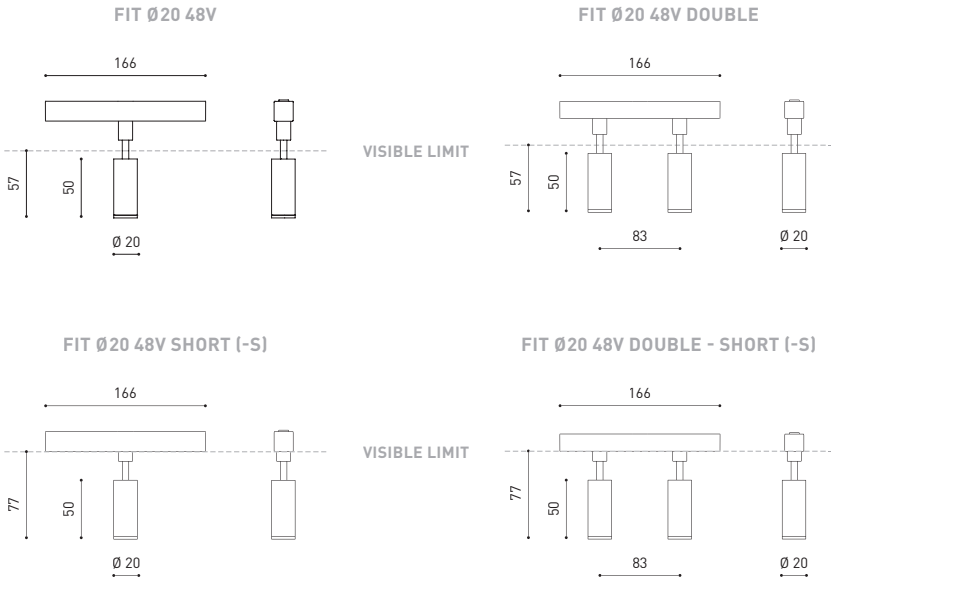

COLOUR | WT  RAL 9016 | NT  RAL 9005 | MATERIAL |  AL |  PC |  » 48

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).  » PLEASE CONSULT

48V SYSTEM

PLUS 48V



ACCESSORIES

PLUS High Chromatic LED**

PLUS MINI High Chromatic LED**

NOT SOLD SEPARATELY



		+RE	P	CCT	Beam	I	Flux	LOR
PLUS 48V	A323-00-	⓪ -0- WT NT -S	18W	2700K	12°-51°	500mA	1920Lm	26-40%
	A323-00-	⓪ -1- WT NT -S	18W	3000K	12°-51°	500mA	2000Lm	26-40%
	A323-00-	⓪ -2- WT NT -S	18W	4000K	12°-51°	500mA	2030Lm	26-40%

LED | 48 V | CE | III | IP20 | CRI>90 | L80B10 >60.000 h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V OPTIONS RE

360°

180°

12°-51°

12°-51°

		+RE	P	CCT	Beam	I	Flux	LOR
PLUS Mini 48V	A326-00-	⓪ -0- WT NT -S	6,5W	2700K	10°-41°	700mA	630Lm	20-40%
	A326-00-	⓪ -1- WT NT -S	6,5W	3000K	10°-41°	700mA	660Lm	20-40%
	A326-00-	⓪ -2- WT NT -S	6,5W	4000K	10°-41°	700mA	680Lm	20-40%

LED | 48 V | CE | III | IP20 | CRI>90 | L80B10 >60.000 h

MacAdam Step 2

OPTIONS*

INCL

TRACK 48V OPTIONS RE

360°


180°

10°-41°

10°-41°

⓪	*OPTIONS
1	No DIM
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
⌀	Track 48V	A3230010WT
-S	Track 48V Short	A3230010WT-S

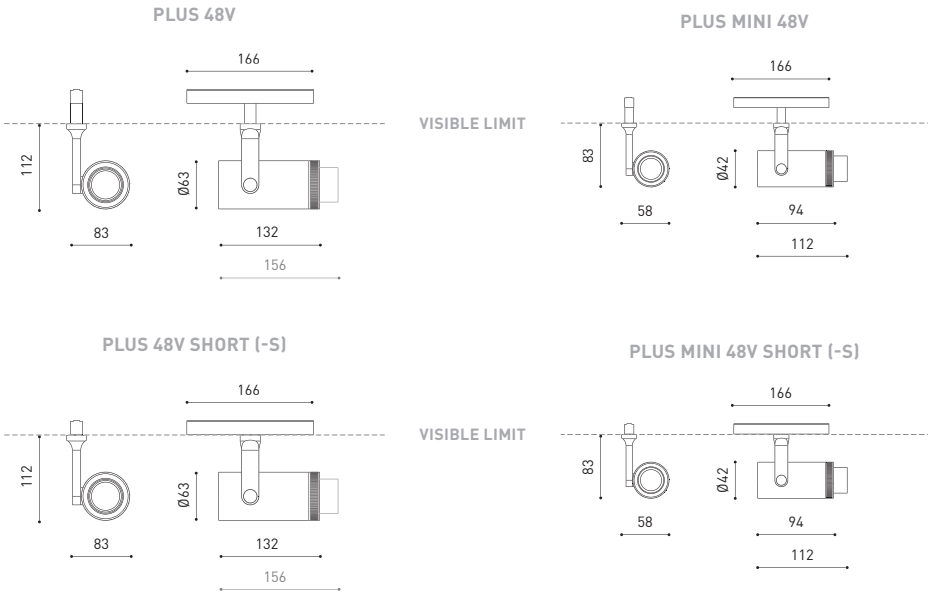

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 | MATERIAL | AL | OPTICAL GLASS || OPTICAL PMMA | » 48

** ACCESSORY AFFECTS THE LIGHTING PARAMETERS

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT

48V SYSTEM

ZEN TUBE 48V



		+RE	P	CCT	I	Flux	LOR
ZEN TUBE 48V 1	A341-11-	⓪ -0- WT NT -S	12W	2700K	350mA	1580Lm	90%
	A341-11-	⓪ -1- WT NT -S	12W	3000K	350mA	1640Lm	90%
ZEN TUBE 48V 2	A341-12-	⓪ -0- WT NT -S	17W	2700K	500mA	2130Lm	90%
	A341-12-	⓪ -1- WT NT -S	17W	3000K	500mA	2220Lm	90%
ZEN TUBE 48V 3	A341-13-	⓪ -0- WT NT -S	23W	2700K	700mA	3070Lm	90%
	A341-13-	⓪ -1- WT NT -S	23W	3000K	700mA	3190Lm	90%
	A341-23-	⓪ -0- WT NT -S	23W	2700K	700mA	3070Lm	90%
	A341-23-	⓪ -1- WT NT -S	23W	3000K	700mA	3190Lm	90%

LED | 48 V | CE | III | IP20 | CRI>90 | L80B10 >60.000 h

MacAdam Step 2

INCL

TRACK 48V

355°

270°

16° / 24° / 42°


⓪	BEAM OPTIONS
1	16°
2	24°
3	42°

+RE	REF. ENDING	EXAMPLE
⌀	Track 48V	A3411110WT
-S	Track 48V Short	A3411110WT-S

ACCESSORIES

NOT SOLD SEPARATELY


ZEN High Chromatic LED*

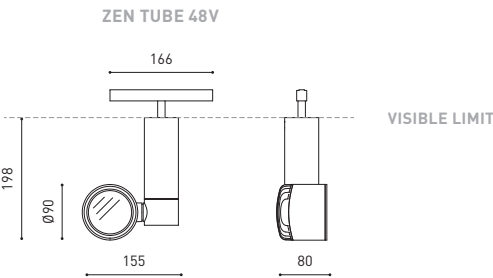

ZEN Anti-glare Honeycomb Louver * 0702-02-00



ZEN Elliptical Refractor * 0700-08-00

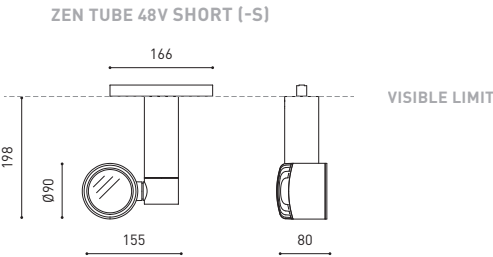

ZEN Beam Mixer Diffuser* 0805-02-00



COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 | MATERIAL | AL | GL-TRANS | » 48

* AFFECTS THE LIGHTING PARAMETERS

+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT

iO 48V



							+RE	P	CCT	Beam	I	Flux	LOR
iD 48V	A348-0-	④	-10-	WT	NT	-S	4,5W	2700K	20°	500mA	485Lm	92%	
	A348-0-	④	-11-	WT	NT	-S	4,5W	3000K	20°	500mA	505Lm	92%	
	A348-0-	④	-20-	WT	NT	-S	4,5W	2700K	30°	500mA	485Lm	89%	
	A348-0-	④	-21-	WT	NT	-S	4,5W	3000K	30°	500mA	505Lm	89%	
	A348-0-	④	-30-	WT	NT	-S	4,5W	2700K	56°	500mA	485Lm	86%	
	A348-0-	④	-31-	WT	NT	-S	4,5W	3000K	56°	500mA	505Lm	86%	



*OPTIONS	
1	No DIM
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
Ø	Track 48V	A3480110WT
-S	Track 48V Short	A3480110WT-S


NOT SOLD SEPARATELY

i0 High Chromatic LED**

iO Anti-glare Honeycomb Louver**	0806-00-00	WT	NT
----------------------------------	------------	----	----



i0 Beam Mixer Diffuser**	0805-01-00
--------------------------	------------

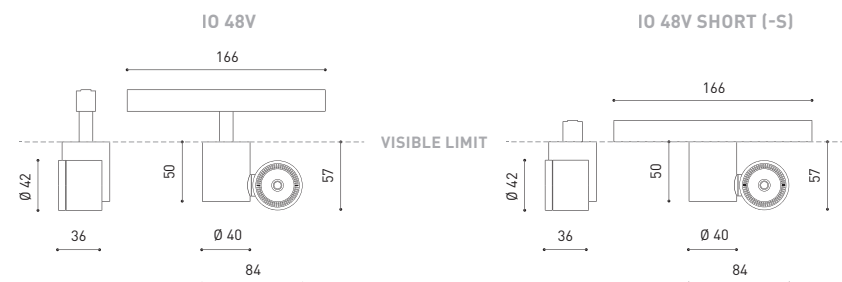

COLOUR | WT ☐ RAL 9016 | NT ☒ RAL 9005

MATERIAL | AL | PC

i >> 48

** AFFECTS THE LIGHTING PARAMETERS

+RE >> THE PRODUCTS FOR THE *TRACK 48V SHORT*, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).

» PLEASE CONSULT



Private residence (Spain) | Design: Manuel García Asociados | Photography: Diego Opazo Fotografía

48V SYSTEM



TOP 48V



			+RE	P	CCT	Beam	I	Flux	LOR			
TOP 48V	A339-0-	⊗ -10-	WT NT -S	6,5W	2700K	20°	700mA	610Lm	92%			
	A339-0-	⊗ -11-	WT NT -S	6,5W	3000K	20°	700mA	640Lm	92%			
	A339-0-	⊗ -20-	WT NT -S	6,5W	2700K	30°	700mA	610Lm	89%			
	A339-0-	⊗ -21-	WT NT -S	6,5W	3000K	30°	700mA	640Lm	89%			
	A339-0-	⊗ -30-	WT NT -S	6,5W	2700K	56°	700mA	610Lm	86%			
	A339-0-	⊗ -31-	WT NT -S	6,5W	3000K	56°	700mA	640Lm	86%			
LED	48 V	CE	III	IP20	CRI>90	L80B10 >60.000h	 MacAdam Step 2	 OPTIONS*	 INCL	 TRACK 48V OPTIONS RE	 UGR <19	 20° / 30° / 56°

⊗	*OPTIONS
1	No DIM
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
∅	Track 48V	A3390110WT
-S	Track 48V Short	A3390110WT-S

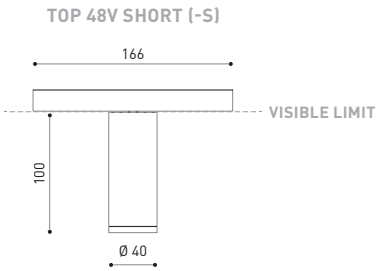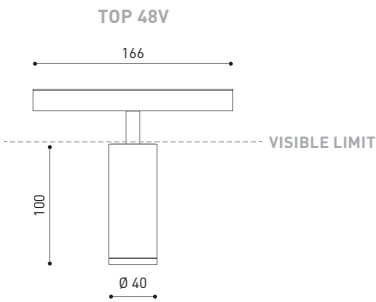

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 | MATERIAL | AL | PC | » 48



** AFFECTS THE LIGHTING PARAMETERS
+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).
» PLEASE CONSULT



										+RE	P	CCT	Beam	I	Flux	LOR			
TOP MINI 48V	A340-0-  -10- WT NT -S									6,5W	2700K	20°	700mA	610Lm	92%				
	A340-0-  -11- WT NT -S									6,5W	3000K	20°	700mA	640Lm	92%				
	A340-0-  -20- WT NT -S									6,5W	2700K	30°	700mA	610Lm	89%				
	A340-0-  -21- WT NT -S									6,5W	3000K	30°	700mA	640Lm	89%				
	A340-0-  -30- WT NT -S									6,5W	2700K	56°	700mA	610Lm	86%				
	A340-0-  -31- WT NT -S									6,5W	3000K	56°	700mA	640Lm	86%				
	48 V			IP20	CRI>90	 L80B10 > 60.000 h			MacAdam Step 2		OPTIONS*		INCL		TRACK 48V OPTIONS RE		UGR <19		20° / 30° / 56°

⊗	*OPTIONS
1	No DIM
2	DIM DALI

+RE	REF. ENDING	EXAMPLE
∅	Track 48V	A3400110WT
-S	Track 48V Short	A3400110WT-S

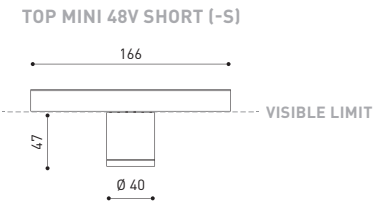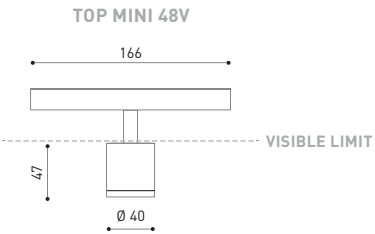

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 | MATERIAL | AL | PC | » 48

** AFFECTS THE LIGHTING PARAMETERS
+RE >> THE PRODUCTS FOR THE TRACK 48V SHORT, ADD "-S" AT THE END OF THE SALES REFERENCE (AFTER THE LETTERS WHICH INDICATE THE COLOUR OF THE PRODUCT).
» PLEASE CONSULT

ACCESSORIES

NOT SOLD SEPARATELY

TOP High Chromatic LED**



TOP Beam Mixer Diffuser** 0805-01-00



TOP Anti-glare Honeycomb Louver** 0807-00-00 | WT | NT |



ACCESSORIES

NOT SOLD SEPARATELY

TOP High Chromatic LED**



TOP Beam Mixer Diffuser** 0805-01-00



TOP Anti-glare Honeycomb Louver** 0807-00-00 | WT | NT |

