
Dimplex®

Built-in Fireplace

33" Slim Line Built-in Electric Firebox

BFSL33

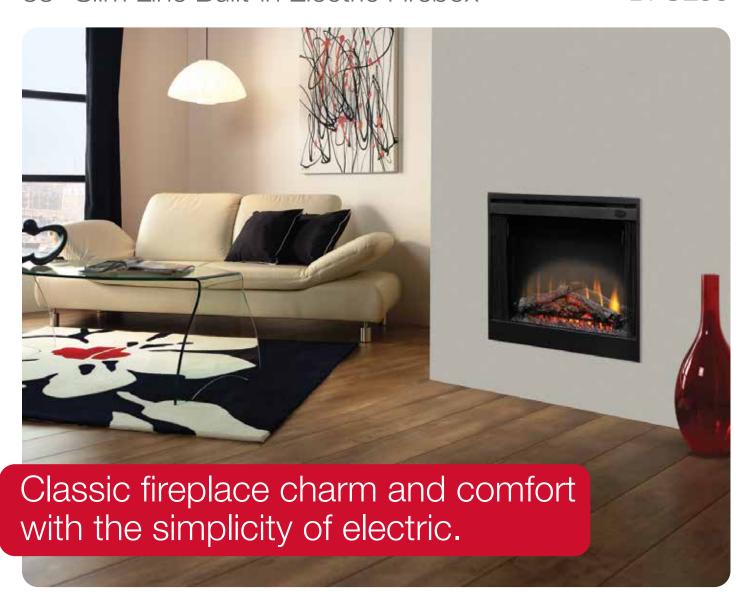

BF Series fireboxes solve design challenges, add exceptional value, and look great doing it. Their exceptional versatility means they can be installed virtually anywhere, especially in locations and buildings that are impossible for a combustion fireplace. And as with all Dimplex fireplaces, The BF Series offer realism that continues to set the bar in the industry and ensures that everyone – from the designer and contractor, to homeowner – is happy with the results.



Built-in Fireplace

33" Slim Line Built-in Electric Firebox

BFSL33



120 Volts | 1,223 Watts | 4,173 BTU 208 Volts | 1,823 Watts | 6,220 BTU 240 Volts | 2,423 Watts | 8,267 BTU

| Model # | Description | Lbs / Kg | UPC | Wty.† | Carton Dimensions (Wx | nsions (WxHxD) | | Cube | |
|----------------------|--|-----------|---------------|-------|--------------------------|--------------------|------|------|--|
| | | | | | Inches | cm | ft³ | m³ | |
| BFSL33 | 33" Slim Line Electric Firebox, with trim kit | 68 / 30.9 | 781052 064478 | 2 yr. | 38-1/8 x 29-3/4 x 13-3/8 | 96.8 x 75.4 x 33.8 | 8.7 | 0.2 | |
| Optional Accessories | | | | | | | | | |
| BFSL33DOOR | 33" Single Pane, tamperproof glass door | 17 / 7.7 | 781052 063778 | | 36-7/8 x 4-1/4 x 25 | 93.6 x 10.5 x 63.5 | 1.77 | 0.1 | |
| WRCPF-KIT | Wall switch remote control | 1.5 / 0.7 | 781052 056787 | | 6-3/8 x 5-1/2 x 3-1/4 | 16.2 x 14.1 x 8.1 | 0.07 | 0.00 | |
| TS521W | Wall thermostat - white | 0.5 / 0.2 | 781052 042407 | | 2-3/4 x 4-3/4 x 2 | 7.2 x 12.3 x 5.0 | 0.02 | 0.00 | |
| BFPLUGE | Plug kit | 0.6 / 0.3 | 781052 040748 | 1 yr | 6-3/4 x 6-1/2 x 6-3/4 | 17.1 x 16.5 x 17.1 | 0.2 | 0.00 | |

Specifications, finishes and dimensions are subject to change. † Limited warranty. @2020 Glen Dimplex Americas.

Features

The Original Dimplex Flame Effect™

A blend of technology, artistry and craftsmanship that sets the standard for realism.

Patented Inner Glow Logs

Individually molded and hand-finished logs pulse and glow from within for the look of natural burning logs.

Primary Heating

Option to use 240 volt supply for up to 9,200 BTU - use as part of primary heating plan.

Three-stage Remote

Enjoy flames with half-heat, full-heat or flames only.

Wired, Seamless Design

Designed for built-in installations wired directly to a dedicated circuit for a clean, custom appearance (Optional plug kit available).

Reduces Liability

Ideal for public spaces in commercial installations; meets the strictest building codes.

All-season Flames

Enjoy the unique charm of a fireplace 365 days a year using the flames without the heat.

S Economical

Economical to operate costing only pennies per hour.*

Low Carbon Footprint

The most sustainable fireplace option; no emissions and 100% efficient.

LED Lighting

Flame and lights use brilliant, low-energy LED's that require zero maintenance.

^{*} Based on national average residential electricity rate. Rates vary.



Built-in Fireplace

33" Slim Line Built-in Electric Firebox

BFSL33

Accessories



BFSL33DOOR
- Single pane, tamperproof glass door Dimensions:
29-1/8" W x 18-1/4" H x 1/2" D (74.0 cm x 46.4 cm x 1.27 cm)



WRCPF-KIT
- Wall switch
remote control



TS521W
- Wall thermostat



BFPLUGE - Plug kit

