In Common With

Alien Surface Mount, Plug-in *Technical Specifications*





Alien Surface Mount, Plug- in

Technical Specifications

Materials	Ceramic, steel or brass	
Product weight	4.25 lbs	
Lead time	12 weeks	
Bulbs included (3)	E12 / 120 V / 4.5 W / 450 lm 2000 K - 2800 K / dimmable	
Dimmer	Optional in-line dimmer switch	
Cord length	16 feet	
Max wattage	30 W	
Certifications	UL listed, damp-rated	




Notes

- 1. This fixture can be ordered with an on/off switch or an inline dimmer; see additional details below.
- 2. Fixtures ordered with painted metal hardware and an on/off switch come with a 16-foot black fabric cord. The on/off switch is located 8 feet from the plug.
- Fixtures ordered with painted metal hardware and an inline dimmer have a 16foot black nylon cord. The dimmer switch is our black painted metal finish and is located 8 feet from the plug.
- 4. Fixtures ordered with brass hardware and an on/off switch come with a 16-foot chocolate brown fabric cord. The on/off switch is located 8 feet from the plug.
- Fixtures ordered with brass hardware and an inline dimmer have a 16-foot chocolate brown fabric cord. The dimmer switch is our black painted metal finish and is located 8 feet from the plug.
- 6. Custom cord color can be specified for an additional cost; please inquire.
- This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship.
- 8. Dimensions may vary within one inch.

Updated July 26, 2023

In Common With

Technical Drawings

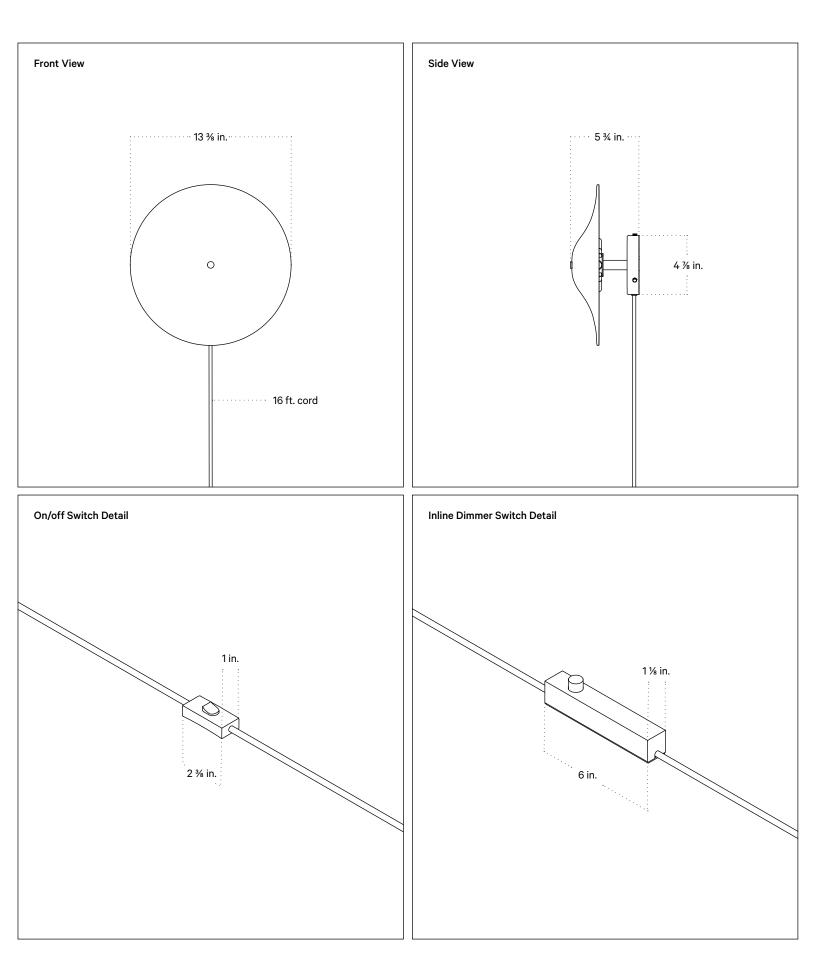

In Common With

Finish Options

Brass, glass, and ceramic samples made or finished by hand may exhibit variability. Available for purchase at <u>incommonwith.com/finishes</u>.

Ceramic				
Tan Clay	White Clay	Terracotta		
Painted Metal				
	•		•	
Black	Bone	Oxide Red	Reed Green	Peach
Brass				
		•		
Brass	Patina Brass	Blackened Brass	Pewter	