

RETRO SERIES

5 YEARS WARRANTY **66** IP RATING **10** IK RATING **>75** CRI

- » Efficacy 130lm/W
- » IP66 Waterproof, IK10 Impact resistant and anti-corrosion body.
- » Type-II, Type-III distribution
- » Very low Unified Glare Rating (UGR)
- » High-Performance driver.



ETG-RSL40



ETG-RSL80



ETG-RSL120



ETG-RSL160



ETG-RSL200




ETG-RSL240




ETG-RSL280

RETRO SERIES


MODEL NUMBER	ETG-RSL40	ETG-RSL80	ETG-RSL120	ETG-RSL160	ETG-RSL200	ETG-RSL240	ETG-RSL280
Power	40W	80W	120W	160W	200W	240W	280W
Lumen (lm)	5200lm	10,400lm	15,600lm	20,800lm	26,000lm	31,200lm	36,400lm
IP Rating	IP66						
IK Rating	IK10						
PF	PF>0.9						
CRI	70, 80 (90 Optional)						
Luminous Efficacy	130lm/W						
Operating Temperature	-30°C ~ +50°C						
Voltage	100- 480 VAC (50-60Hz)						
DC Suport	12V	24V	24V	-	-	-	-
Material	Die-cast Aluminum, Mitshubishi PC Lens						
Beam Angle	Type- II & Type III						
Color Temperature	3000-3500k / 4000-4500k / 6000-6500k						
Light Source	PHILIPS LUXEON T						
Dimension	495 x 300 x 107mm	576 x 300 x 107mm	657 x 300 x 107mm	738 x 300 x 107mm	819 x 300 x 107mm	900x 300 x 107mm	981 x 300 x 107mm
Net Weight	5.8kg	7.2kg	8.6kg	9.7kg	10.9kg	12.3kg	15.8kg
Life span	More than 50000 Hrs						
Warranty	5 Years						




ETG-RSL40




ETG-RSL80




ETG-RSL120

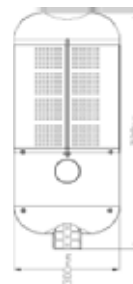


ETG-RSL160

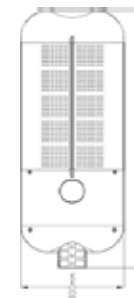

ETG-RSL200

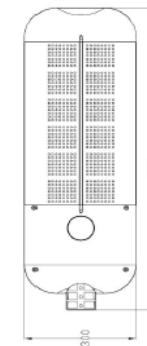

ETG-RSL240

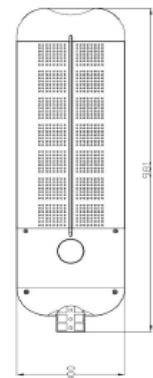

ETG-RSL280