

EARTHLIGHT
ECO TRIDENT SERIES
 BATTEN LIGHT



FEATURES

- » Over 50% energy saving compared to conventional fluorescent lights.
- » Ideal for surface mounted or suspended lighting application
- » Light weight made easy to mount on any kind of ceiling surface

APPLICATIONS

- Supermarket
- Warehouse
- Parking lots
- Bus stations
- Train stations
- Airport
- Gas stations
- Factory
- Schools








GENERAL SPECIFICATIONS

Models	ETG-ETS1200
Power	40W
Light Source	SMD2835
CCT(K)	5000K/6000K
AC Input	220-240V 50/60Hz
Operating Temperature	-20° ~ +40°C
Efficiency	90~100lm/w
Power Factor	≥0.93
Lumen (frost)	4000lm
IP Rating	IP20
CRI	80
Beam Angle	120°
Dimming	No
Body Color	White
Warranty	5 Years



ECO Trident Installation Guide

1 Power OFF

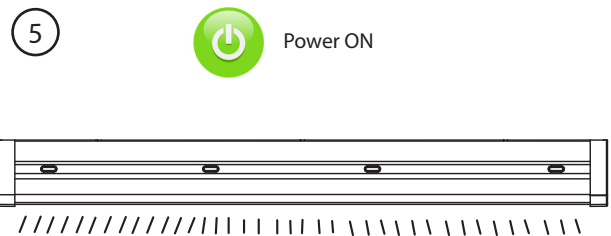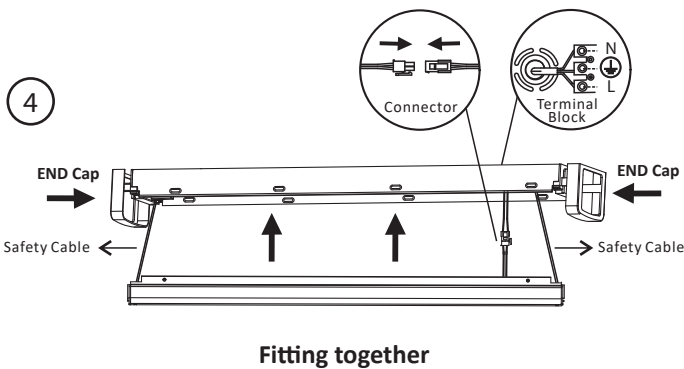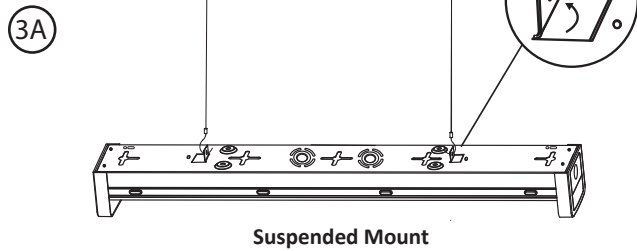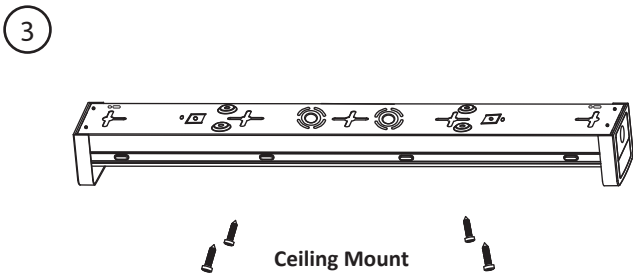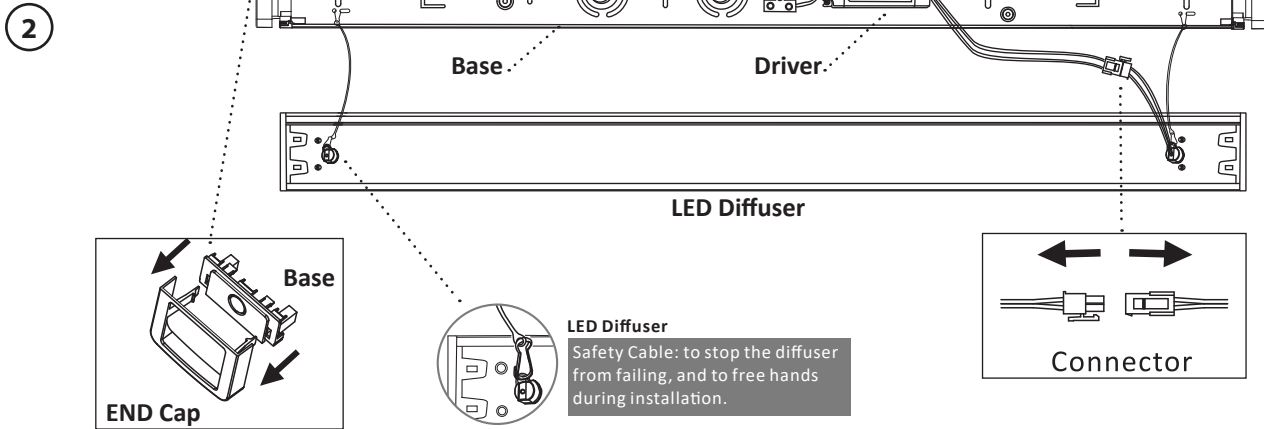

- ALWAYS turn off and isolate the electrical supply before and during installation.
- MUST be installed by licensed electricians.
- Protect against steam and corrosion