



FEATURES

- » 36W LED replaces a 72W fluorescent fitting
- » Seamless flat panel
- » High efficiency LED Panel lights
- » Robot double side soldering
- » No light leakage, No bugs gap
- » Lasts for over 50,000 hours

GENERAL SPECIFICATIONS

Models	ETG-SPL6030 / ETG-SPL12060 ETG-SPL6060 / ETG-SPL12030
Input Voltage	90-277VAC (50/60Hz)
IP Rate	IP44
Lumen Efficiency	110 lm/w
Lumen Range	2640lm ~ 6480lm
CCT	4000K, 5000K, 6000Kv
Light Angle	120°
Lifespans	>50,000Hrs



RoHS **CE**

APPLICATIONS


- Office
- Meeting room
- Laboratories
- Libraries
- Studios
- Hospital
- Retail store
- Super market
- House
- Hotels
- Rooms
- Any Interior Ceilings

SPECIFICATION

Model	ETG-SPL6030	ETG-SPL6060	ETG-SPL12030	ETG-SPL12060
Power	24W	40W	40W	72W
Approvals	SAA/C-tick, RoHS, CE	SAA/C-tick, RoHS, CE	SAA/C-tick, RoHS, CE	SAA/C-tick, RoHS, CE
Lm/W	110 lm/W	110 lm/W	110 lm/W	110 lm/W
Lumen (lm)	2640 lm	4400 lm	4400 lm	6480 lm
IP Rating	IP44	IP44	IP44	IP44
Voltage	AC 90-277V	AC 90-277V	AC 90-277V	AC 90-277V
Power factor	>0.9	>0.9	>0.9	>0.9
Ra	>80	>80	>80	>80
LED Color Temp	4000K, 5000K, 6000K			
Beam Angle	120°	120°	120°	120°
Warranty	3 Years	3 Years	3 Years	3 Years
Replaces	T8 Fluorescent 3X18W	T8 Fluorescent 3X18W	T8 Fluorescent 4X36W	T8 Fluorescent 4X36W
Installation Height	3 - 8 Meter			
Dimension	600 x 300 x 9 (mm)	600 x 600 x 9 (mm)	1200 x 300 x 9 (mm)	1200 x 600 x 9 (mm)
Life Span	50,000 Hrs			
Connection	1.2m Power Cable with SAA Plug			
Dimension	White	White	White	White

* The actual effects of the lumen output will depend on the application and environment, replacement wattage is approximate.
 * Note: Sizes designed to fit T-Bar ceiling grid.

DIMENSIONS

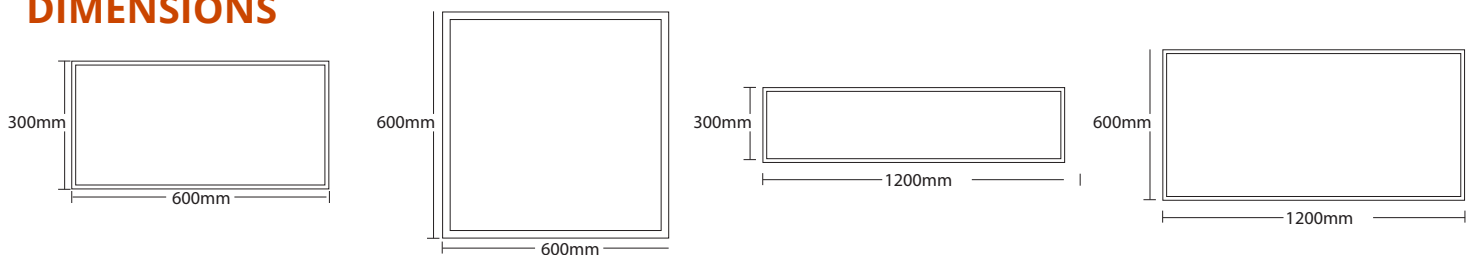

OPTIONAL FRAMES



DISCLAIMER

Important Statement of warranty.

Earthtrack reserves the right to change or discontinue a product and/or specification without notice. All warranty periods only cover faulty workmanship and/or material components. Any claims on misused or disassembled products will not be recognized by Earthtrack. All information enclosed in this catalogue, to our knowledge, was correct at time of print.