

PSA Oxygen Generator

Onyx Series



Specifically designed for reliability, energy efficiency, and ease-of-use, there are thousands of Onyx PSA Oxygen Generators currently in use throughout the world. The Onyx's reliability, low noise level, and ability to deliver up to 95.5% oxygen concentration make it a perfect fit for many applications.

Features

- Self-contained (internal air compressor)
- Transportable roller base design
- Advanced Engineering
- Easy to install and maintain
- Low operating cost
- Time-proven reliability
- High-impact polystyrene enclosure

Typical Applications

Manufacturing

- Jewelry/Brazing/Soldering

Artistic

- Glass Work/Blowing

Environmental

- Ozone (Generator) Feed Gas
- Environmental Remediation



Additional

- Fish Farming
- Laboratory Experiments
- Aquaponics
- Hydroponics

Specifications

	Onyx	Onyx Plus	Onyx Ultra
Product Characteristics			
Product Flow ¹	6 LPM (12 SCFH)	8 LPM (17 SCFH)	10 LPM (21 SCFH)
Product Pressure	9 psig (62 kPa)	20 psig (138 kPa)	20 psig (138 kPa)
Product Concentration (nominal)	93%	93%	93%
Product Dew Point	-100°F (-73°C)	-100°F (-73°C)	-100°F (-73°C)
Dimensions (W x D x H) (nominal)	16 x 15 x 29 in (40 x 37 x 72 cm)	16 x 15 x 29 in (40 x 37 x 72 cm)	16 x 15 x 29 in (40 x 37 x 72 cm)
Weight	51 lb (23 kg) [Add 1 lb (0.4 kg) for 220 V ~ unit]	54 lb (24 kg) [Add 1 lb (0.4 kg) for 220 V ~ unit]	56 lb (25 kg) [Add 1 lb (0.4 kg) for 220 V ~ unit]
Physical Connection Product Gas Outlet	¼" FNPT JIC-8	¼" FNPT JIC-8	¼" FNPT JIC-8
Ambient Operating Conditions	Locate the oxygen generator in a well-ventilated area that is protected from weather elements and remains between 40°F (4°C) and 112°F (44°C)		
Control Power Requirements (Single Phase)	120 V ~ ±10%, 60 Hz, 5.0 A 220 V ~ ±10%, 50 Hz, 2.5 A 220 V ~ ±10%, 60 Hz, 2.3 A	120 V ~ ±10%, 60 Hz, 5.5 A 220 V ~ ±10%, 50 Hz, 2.8 A 220 V ~ ±10%, 60 Hz, 2.5 A	120 V ~ ±10%, 60 Hz, 6.0 A 220 V ~ ±10%, 50 Hz, 3.0 A 220 V ~ ±10%, 60 Hz, 2.8 A

¹ LPM (Liters per minute) gas measured at 1 atmosphere and 21°C / SCF (Standard cubic foot) gas measured at 1 atmosphere and 70°F

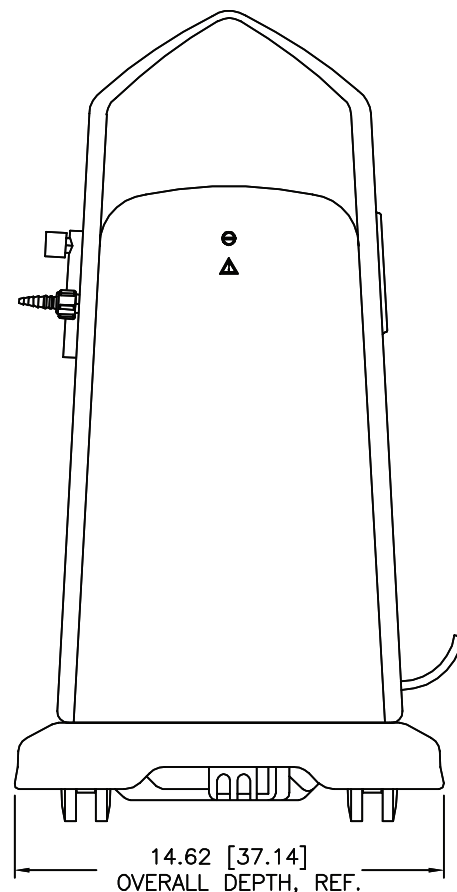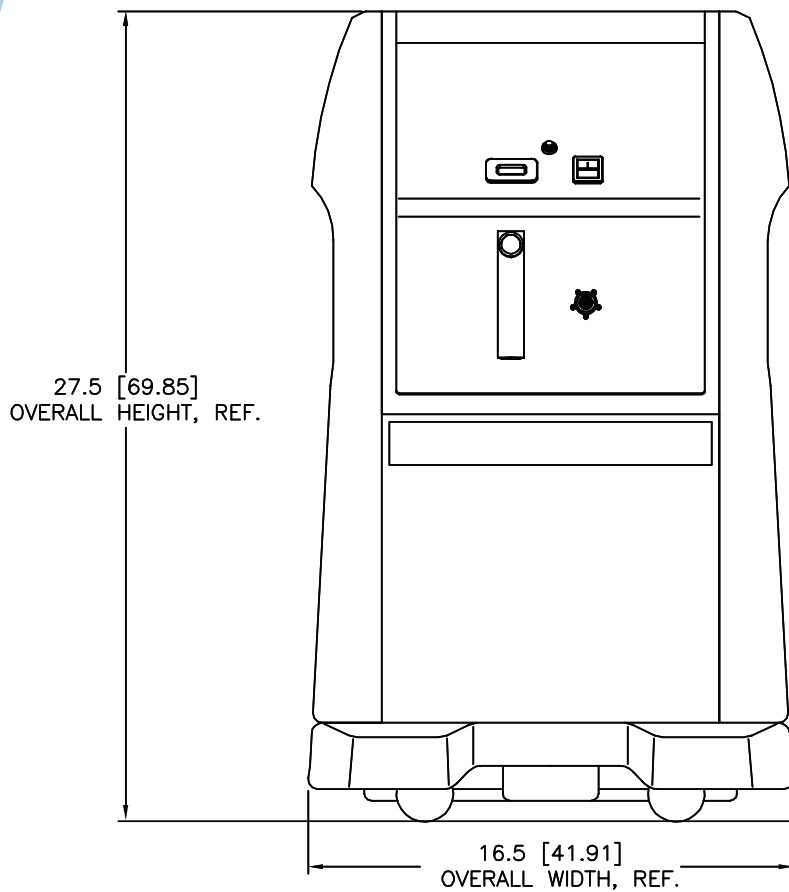

Note: All dimensions are nominal.

Ordering Information

Model	Part Number	Description	
Onyx	AS016-1	120 V ~ ±10%, 60 Hz	
	AS016-2	220 V ~ ±10%, 50 Hz	
	AS016-6	220 V ~ ±10%, 60 Hz	
Onyx Plus	AS017-1	120 V ~ ±10%, 60 Hz	
	AS017-2	220 V ~ ±10%, 50 Hz	
	AS017-6	220 V ~ ±10%, 60 Hz	
Onyx Ultra	AS121-1	120 V ~ ±10%, 60 Hz	
	AS121-2	220 V ~ ±10%, 50 Hz	
Shipping Information	Onyx	Onyx Plus	Onyx Ultra
Class	92.5	92.5	92.5
Commodity Classification Number	8421.39.8040	8421.39.8040	8421.39.8040
Dimensions (W x D x H)	17 x 16 x 34 in (44 x 40 x 85 cm)	17 x 16 x 34 in (44 x 40 x 85 cm)	17 x 16 x 34 in (44 x 40 x 85 cm)
Gross Weight	60 lb (27 kg)	63 lb (29 kg)	66 lb (30 kg)

Warranty: 1 Year Parts and Factory Labor*

* An unprotected or inadequately ventilated environment, or improper control power may cause damage to the oxygen generator not covered under warranty.

All performance ratings based on an ambient temperature up to 100°F (38°C), up to 1,000 feet elevation, and 80% relative humidity.

Copyright (C) 2015 Chart Industries
CAIRE Inc./Chart SeQual Technologies Inc./Chart Inc./AirSep Corp. reserves the right to discontinue its products, or change the prices, materials, equipment, quality, descriptions, specifications and/or processes to its products at any time without prior notice and with no further obligation or consequence.
All rights not expressly stated herein are reserved by us, as applicable.

AIRSEP[®]

A Chart Industries Company

260 Creekside Drive

Buffalo, NY 14228-2075 U.S.A.

Tel: (716) 691-0202 • Fax: (716) 691-1255

www.airsepcpd.com • cpd@airsep.com

ML-IND0002 C