


Brush machine TB 200/300

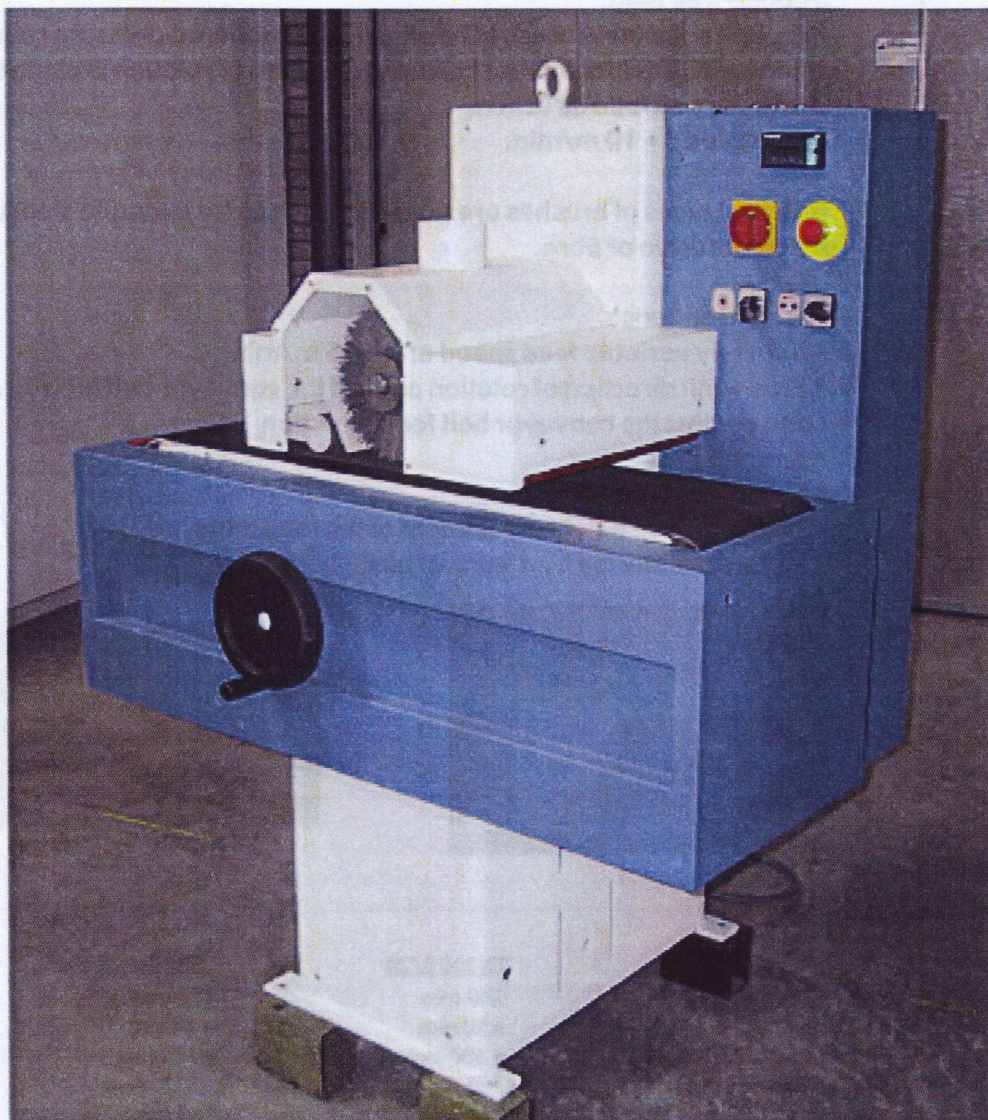

Perfection in sanding

Boere Machinefabriek bv
Brugweg 121
P.O. Box 8
2740 AA Waddinxveen, Holland
Tel +31.(0)182.614400
Fax +31.(0)182.618349
E-mail info@boere.nl
Internet www.boere.nl

Brush machine TB 200/300

Brush machine in 200 of 300 mm working width with 1 or 2 brush units.

Easy adjustable and exchangeable brush.

Before and after the brush unit rubbered pressure rollers provide for a trouble-free feed.

In height adjustable brush in relation to the rubbered pressure rollers.


In standard equipment the brush unit direction of rotation is along the conveyor belt feed direction.

Feed speed 5 + 10 m/min.

Different types of brushes are possible, such as for example steel wire, nylon abrasive or fibre.

Possible options :

- Infinitely variable feed speed of 3 - 15 m/min
- Brush unit direction of rotation against the conveyor belt feed direction or both along and against the conveyor belt feed direction
- Ammeter
- Electronic digital counter
- Electromotive height adjustment of the feed table
- Motors are started by means of push-buttons

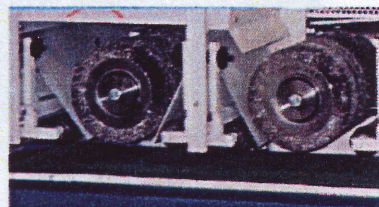

Technical details

	<u>TB 200 B/2B</u>	<u>TB 300 B/2B</u>
Working width	: 200 mm	300 mm
Ø Shaft brush	: Ø 50 mm	Ø 50 mm
Max. diameter brush	: Ø 200 mm	Ø 200 mm
Min. length work pieces at a brush Ø 200 mm	: 240 mm	240 mm
Max. workpiece height	: 200 mm	200 mm
Working height	: 720-920 mm	720-920 mm
Brush motor	: 4 kW/2x 4 kW	5,5 kW/2x 5,5 kW
Feed motor	: 0,75 kW	0,75 kW
Diameter exhaust hood	: Ø120mm/Ø150 mm	Ø150mm/Ø180 mm
Weight	: approx. 550 kg/850 kg	approx. 800 kg/1300 kg

Measurements, weights and construction changes are subject to reserve.

Perfection in sanding

Boere Machinefabriek BV
Brugweg 121
P.O. Box 8
2740 AA Waddinxveen, Holland
Tel +31.(0)182.614400
Fax +31.(0)182.618349
E-mail info@boere.nl
Internet www.boere.nl