


Primozone

GM1-4

Datasheet

KEY FEATURES

- Highest concentration 20 % wt
- Less energy, lower OpEx
- Safe, quiet, reliable
- Re-thinking redundancy
- Modular
- Compact design

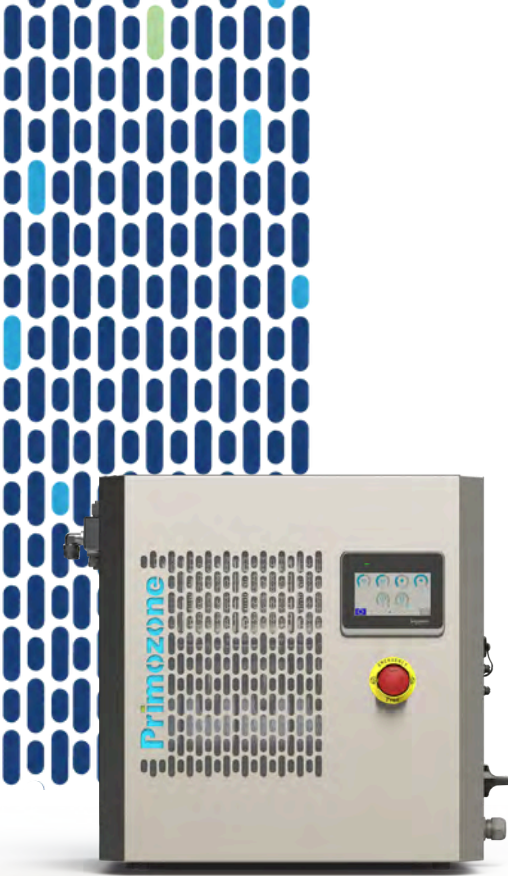

Technical data

Dimension (W x D x H)	603 x 437 x 517 mm / 23.7 x 17.2 x 20.3 in
Gas Connector	8/6 mm push-on fitting
Water Connector	12/10 mm push-in fitting

	Ozone Concentration		Max Ozone Production		Max Oxygen Consumption			Max Power (kW)	Weight
	g /m ³	%	g/hour	lbs/day	m ³ /h*	l/min*	SCFH*		
GM1	150	10 %	60	3.2	0.41	6.8	15	0.60	36 kg 79.3 lbs
	200	13 %	50	2.6	0.25	4.2	9.5		
	250	17 %	40	2.1	0.16	2.6	6.0		
	300	20 %	27	1.4	0.098	1.6	3.7		
GM2	150	10 %	120	6.3	0.81	14	31	1.2	45 kg 99.2 lbs
	200	13 %	100	5.3	0.50	8.4	19		
	250	17 %	80	4.2	0.32	5.3	12		
	300	20 %	54	2.9	0.20	3.3	7.4		
GM3	150	10 %	180	9.5	1.2	20	46	1.8	52 kg 114.6 lbs
	200	13 %	150	7.9	0.75	13	29		
	250	17 %	120	6.3	0.48	7.9	18		
	300	20 %	81	4.3	0.29	4.9	11		
GM4	150	10 %	440	13	1.6	27	62	2.4	60 kg 132.2 lbs
	200	13 %	200	11	1.0	17	38		
	250	17 %	160	8.3	0.63	11	24		
	300	20 %	110	5.7	0.39	6.5	15		

The above figures vary +10 % and apply under the cooling conditions recommended by Primozone

*These values assume gas properties are standardized at 0 °C 68 °F and atmospheric pressure

Primozone Production AB
Terminalvägen 2
246 42 Löddeköpinge Sweden

Primozone Inc.,
5245 West Irlo Bronson
Memorial Highway, Unit #1
Kissimmee, FL 34746

Phone: +46-46-70 45 70
info@primozone.com
www.primozone.com