




PRODUCT FEATURES

- Split doors and Upright series.
- Stainless steel interior and exterior.
- Programmable electronic controller and display
- Standard with 8 x shelves.
- 2 years parts and labour warranty.
- Comes standard with 4 x lockable (115 mm) castors (not legs).

TECHNICAL DRAWING

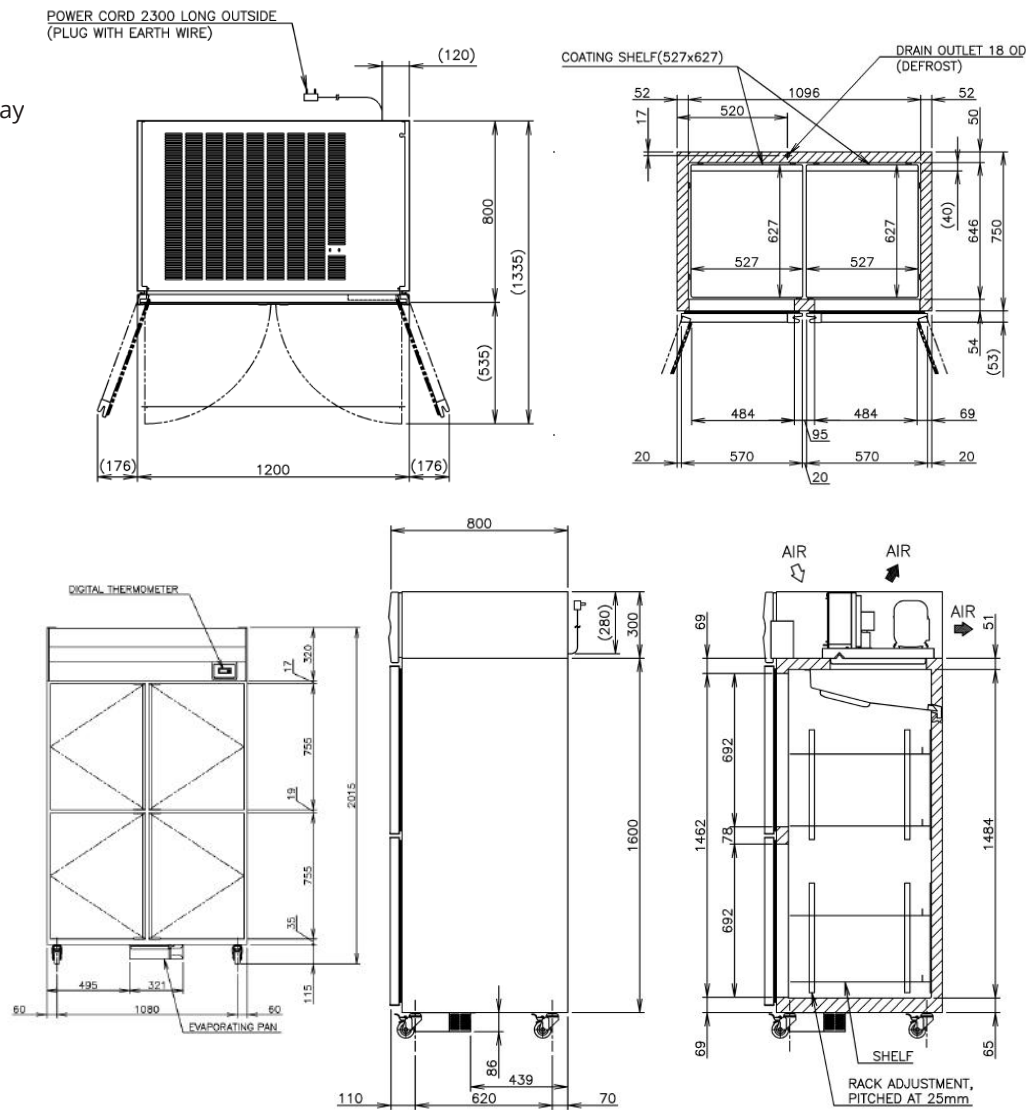

PRODUCT SPECIFICATION

Interior	Stainless Steel, ABS Plastic (Doors)
Exterior	Stainless Steel, Galvanized Steel (Top,Rear,Bottom)
Effective Capacity	1047L
Temperature Control	Microprocessor adjustable from -23°C to -7°C
Evaporator	Fin & Tube type
Outside Dimensions	1200mm (W) x 800mm (D) x 2015mm(H)
Inside Dimensions	1096mm (W) x 646mm (D) x 1484mm (H)
Refrigeration System	Forced Air Circulation
Weight Net/Gross (kg)	149 / 180
AC Supply Voltage	1 PHASE 220 - 240V 50Hz /10amp Plug
Amperage	Rated: 4.9A Starting: 15.6A
Refrigerant Operating	R404A
Conditions	Ambient Temp.: 5-43°C Voltage Range: Rated Voltage ±6%



Descriptions and specifications are subject to change at any time, without notice.
Illustrations for demonstration purposes.

Copyright © 2020 Hoshizaki Lancer Pty Ltd. All right reserved. E&OE Date: Sept 2020