



The SKY fixture design allows for high-performance lighting in vertical and low mounting grow applications. This powerful, full-spectrum light is intended for experienced growers from the vegetative stage through the higher PPFD flower stage.

ORDERING INFORMATION

MODEL	ТҮРЕ	VOLTAGE	ACCESSORIES
SKY			EXT
	9 FLOWER (900W) 7 FLOWER (720W) 6 FLOWER (630W) 3 VEG (340W)	120 120-277V 277 277-480V	EXT 6' CORD

DRIVER

World class LED driver. Input options Auto Sensing 90V-305V and 245V-528V.

CONTROL

0-10V (Option) Fixture is equipped with an external RJ14 cable and allows for daisy chained installation of up to 160 fixtures per controller (80 fixtures per controller port).


DIMMING


SKY 9 is dimmable in 900W, 720W, 540W, and 360W. SKY 7 is dimmable in 720W, 580W, 430W, and 290W. SKY 6 is dimmable in 630W, 500W, 380W, and 250W. SKY 3 is dimmable in 340W, 270W, 200W, and 140W.

SPECTRUM

Our Broad Spectra offers light emission across the PAR 400-700nm wavelength range. We balance efficiency with quality of light to achieve the desired plant response and work environment.

CHROMACITY 630W Fixture



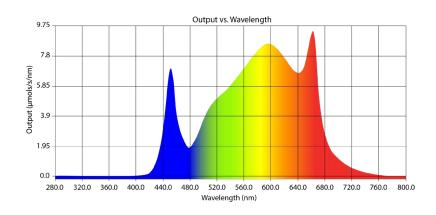






INPUT POWER	340W	630W	720W	900W
EFFICACY	2.8 μmol/J	2.7 μmol/J	2.6 μmol/J	2.65 μmol/J
PPF	952 μmol/s	1700 µmol/s	1870 µmol/s	2385 µmol/s
INPUT VOLTAGE	120V - 277V		277V - 480V	
FIXTURE WEIGHT	27.5lb / 12.5 kg			39lb / 17.7 kg
FIXTURE LENGTH	45.7"			
FIXTURE WIDTH	41.7"			

MOUNTING	≥ 6" Above Canopy	
THERMAL	Passive	
LIFE	50,000 hrs	
POWER FACTOR	> 90%	


CERTIFICATION	UL8800, UL 1598 Wet	
WARRANTY	5 Year Standard	
AMBIENT TEMP	-10°C / 40°C	
STORAGE	-40°C / 85°C	

DIMENSIONS

 ${\tt NOTE: \ Line\ Voltage\ Daisy\ Chain\ Options\ Available,\ Consult\ Factory\ For\ Configurations.}$







900W Power Supply:

