


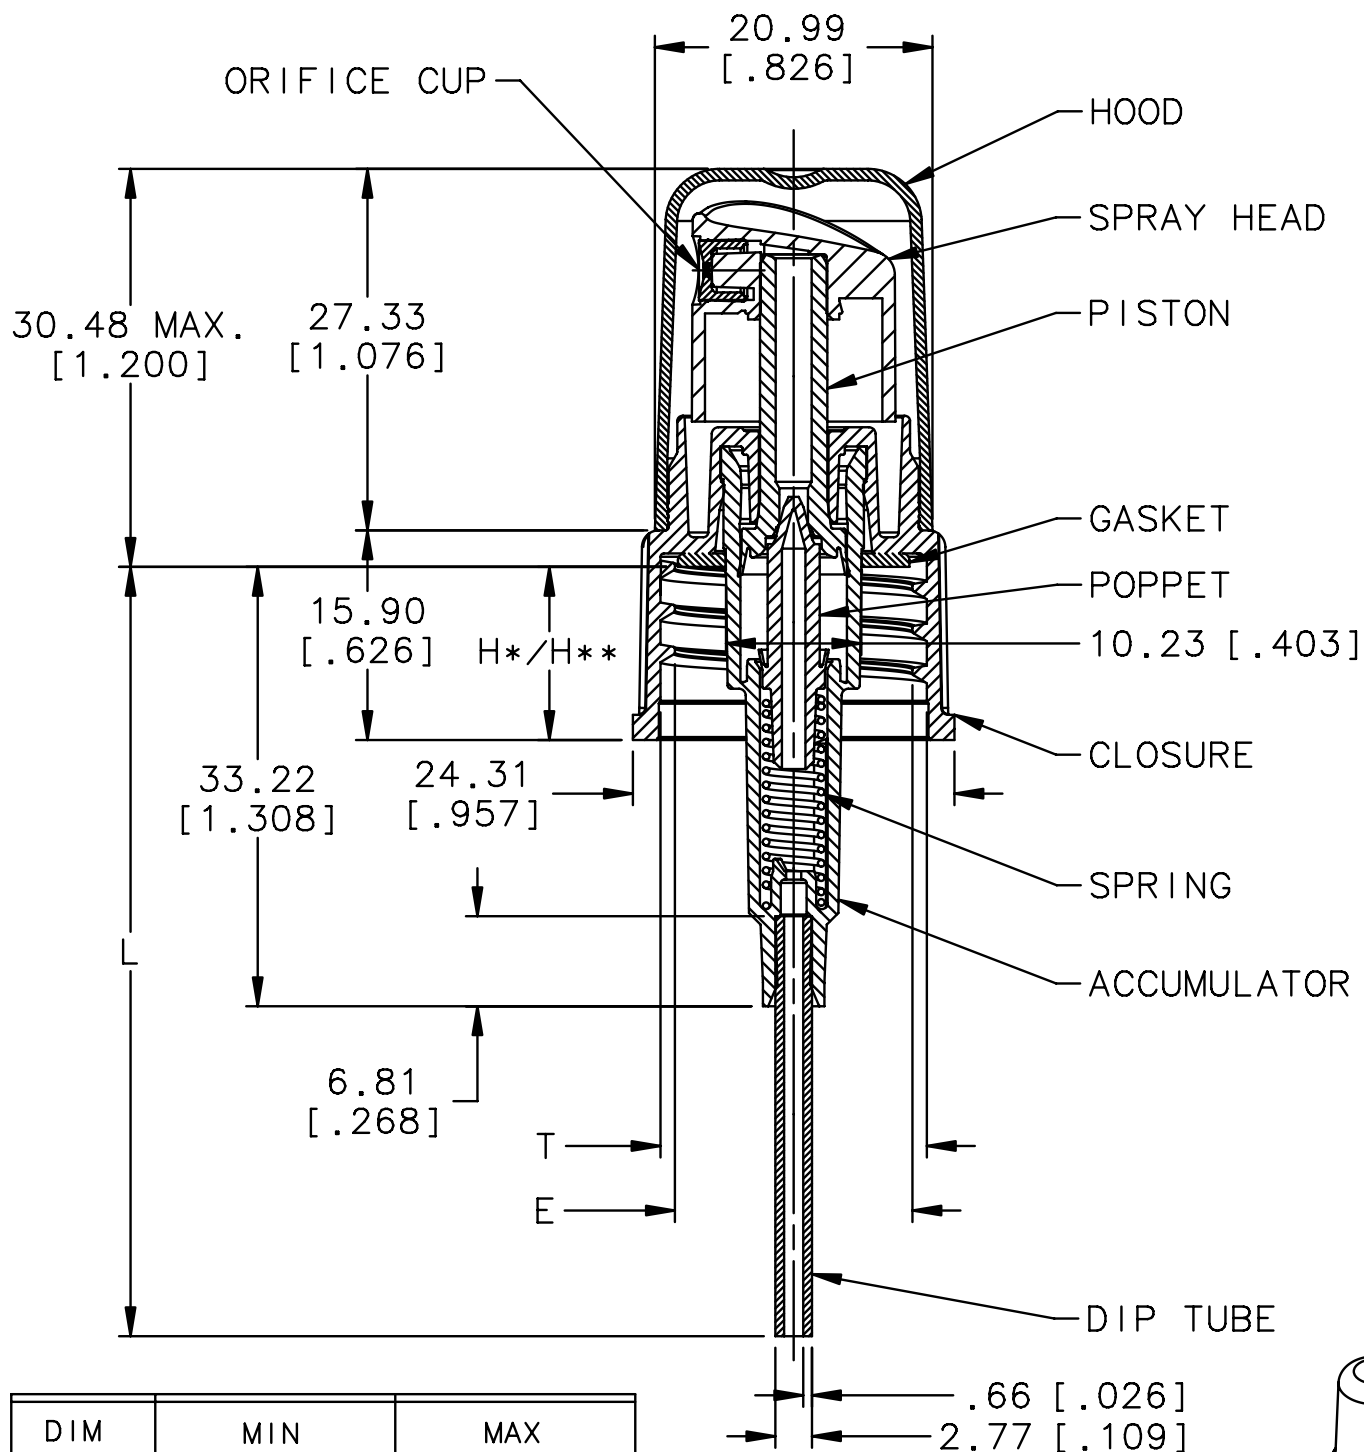

DIM	MIN	MAX
T	19.91 [.784]	20.27 [.798]
E	17.78 [.700]	18.13 [.714]
H*	12.98 [.511]	13.74 [.541]
H**	12.70 [.500]	13.46 [.530]

* TO COMPRESSED GASKET.

** TO UNCOMPRESSED GASKET.

NOTES.- DUAL DIMENSION mm [in.].

"UNCONTROLLED"

NOMINAL OUTPUT: .16 CC

POSSESSION OF THIS DRAWING IS ACKNOWLEDGEMENT THAT IT AND ITS CONTENTS ARE THE EXCLUSIVE PROPERTY OF SILGAN DISPENSING SYSTEMS. THE ARTICLE ON THIS DRAWING OR THE DRAWING MAY NOT BE REPRODUCED IN ANY FORM WHATSOEVER WITHOUT WRITTEN CONSENT FROM SILGAN DISPENSING SYSTEMS. COPYRIGHT SILGAN DISPENSING SYSTEMS CORPORATION



CITADEL
—PACKAGING—
CitadelPackaging.com • 208-650-3393

MARK VI SPRAYER

FS1950-MD

CONFIGURATION: 20-410 RIBBED/DOME TOP/GASKET

DRWN: BVH

DRAWING NO.

06/15/17

03CSD07400