

A


B

C

D

K

| MARK | REVISER | DESCRIRTN | DATE |
|------|---------|-----------|------|
| | | | |

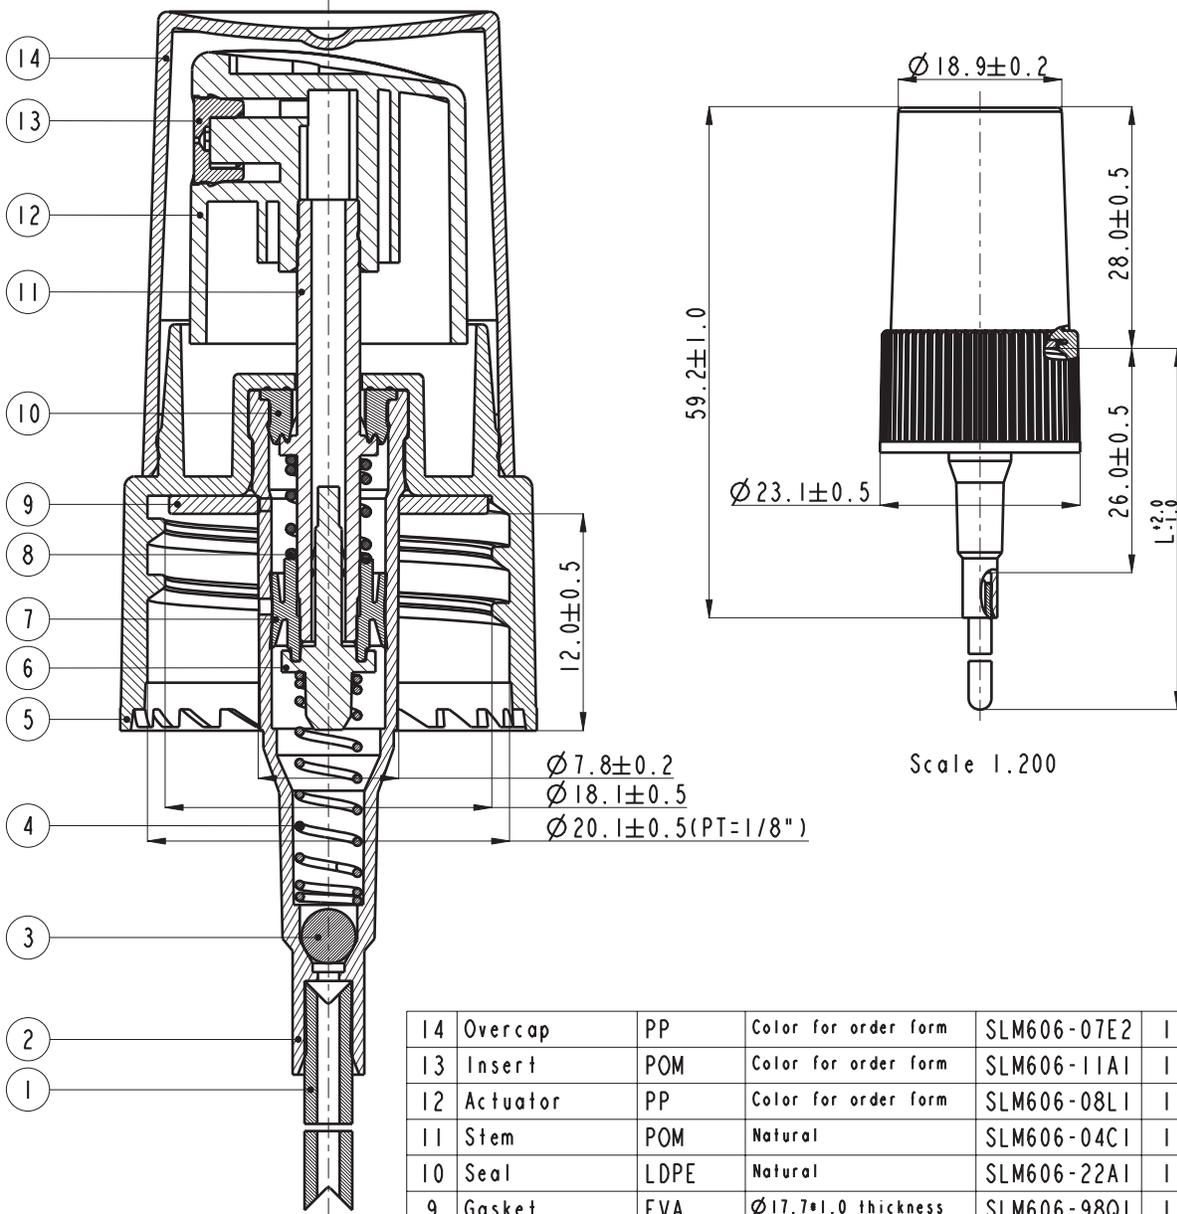

Section A-A

| 14 | Overcap | PP | Color for order form | SLM606-07E2 | 1 | |
|-----|--------------|----------|-----------------------|-------------|-----|--------|
| 13 | Insert | POM | Color for order form | SLM606-11A1 | 1 | |
| 12 | Actuator | PP | Color for order form | SLM606-08L1 | 1 | |
| 11 | Stem | POM | Natural | SLM606-04C1 | 1 | |
| 10 | Seal | LDPE | Natural | SLM606-22A1 | 1 | |
| 9 | Gasket | EVA | Ø17.7*1.0 thickness | SLM606-98Q1 | 1 | |
| 8 | Short Spring | 304H | Ø0.53*7.2L*5.5 circle | SLM606-96A1 | 1 | |
| 7 | Piston | LDPE | Natural | SLM606-03A1 | 1 | |
| 6 | Cone | POM | Natural | SLM606-17A1 | 1 | |
| 5 | Closure | PP | Color for order form | SLM606-05L2 | 1 | |
| 4 | Long Spring | 304H | Ø0.45*17.0L*13 circle | SLM606-96B1 | 1 | |
| 3 | Glass Ball | Glass | Ø3.0MM | SLM606-97A1 | 1 | |
| 2 | Housing | PP | White W030 | SLM606-01B1 | 1 | |
| 1 | Dip Tube | LDPE | Ø2.65*0.7 thickness | SLM606-95B1 | 1 | |
| No. | Component | Material | Specification | Part No. | QTY | Remark |

| | | | | | | | | | |
|--------|------------|--------|--------|-------|---------------------|------------|---|-----------|---------|
| 6 | TOLERANCE | | | ○ | APPROVED: | UNIT: mm |  | | |
| | 0mm-15mm | ±0.05 | ±0.10 | ±0.50 | CENSOR: | FS4020-MD | TITLE: 20/400 Assemble | | |
| | 15mm-30mm | ±0.05 | ±0.15 | ±1.00 | CHECKED: | SCALE: 5:2 | VISUAL ANGLE | Q'TY: 1/1 | REV: A1 |
| | 30mm-50mm | ±0.10 | ±0.20 | ±1.50 | DRAFTER: 2013.03.06 | PART NO. | FILE NO. | | |
| | 50mm-99mm | ±0.15 | ±0.30 | ±2.00 | | | | | |
| | ABOVE 99mm | ±0.20 | ±0.40 | ±2.50 | | | | | |
| | CENTER | ±0.10 | ±0.50 | ±1.00 | | | | | |
| ANGLER | ±0.25° | ±0.50° | ±2.00° | | | | | | |

A

B

C

D