

HANDLE OPERATED COFFEE BREWER

CBS-6000 Series

CBS-62H

Twin 3.0 Gallon Brewer

The CBS-6000 Series was designed for simplicity. The Handle Operated Series brewers save the operator time and effort by delivering quick and consistent results from your pre-programmed coffee recipe. It is the reliable choice for serving high-volumes of single batch coffee all day long.



Handle operation — a quick start!

After loading the coffee grounds, simply twist the handle to begin the brew cycle and in minutes your perfectly brewed coffee is ready to serve — over and over again!



Manual water faucet.

Safely dispense hot water away from steam and brew basket.



Set it and forget it.

Brew directly into the ultra durable TPD-30 thermal dispensers (sold separately). Available in multiple power configurations to efficiently meet your cups-per-hour requirement and keep energy costs at a minimum.

Shown with 3.0 Gallon LUXUS® Thermal Dispensers (TPD-30)

FETCO®
TRUSTED | RELIABLE | QUALITY

Water Specification

Water Inlet
3/8" male flare fitting

Minimum Flow Rate
2 gpm [3.8 lpm]

Water Pressure
20-75 psig [138-517 kPa]


Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] /Hour
US & CANADA								
C62016	3 x 3.0 kW	120/208-240	1	3+G	6.9-9.1	Terminal Block	32.9-37.9	18.0-21.0 [68.1-79.5] ⁽¹⁾
C62026	3 x 4.0 kW	120/208-240	1	3+G	9.1-12.1	Terminal Block	43.7-50.4	21.0-30.0 [79.5-113.6] ⁽¹⁾
C62036 ⁽²⁾	3 x 3.0 kW	120/208-240	3	4+G	6.9-9.1	Terminal Block	19.4-22.4	18.0-24.0 [68.1-90.8] ⁽¹⁾
C62046 ⁽²⁾	3 x 4.0 kW	120/208-240	3	4+G	9.1-12.1	Terminal Block	25.6-29.6	21.0-30.0 [79.5-113.6] ⁽¹⁾
C62056 ⁽²⁾	6 x 3.0 kW	120/208-240	3	4+G	13.6-18.1	Terminal Block	38.2-44.0	33.0-45.0 [124.9-170.3] ⁽¹⁾
C62066 ⁽²⁾	6 x 4.0 kW	120/208-240	3	4+G	18.1-24.1	Terminal Block	50.7-58.5	45.0-54.0 [170.3-204.4] ⁽¹⁾
C62146	6 x 3.0 kW	440-480	3	3+G	15.4-18.1	Terminal Block	20.2-22.0	39.0-45.0 [147.6-170.3] ⁽¹⁾
C62166	6 x 4.0 kW	440-480	3	3+G	20.4-24.1	Terminal Block	26.8-29.2	45.0-54.0 [170.3-204.4] ⁽¹⁾
INTERNATIONAL								
C62106 ⁽²⁾	6 x 3.0 kW	220-240/380-415	3	4+G	15.4-18.1	Terminal Block	23.3-25.4	39.0-45.0 [147.6-170.3] ⁽¹⁾
C62136 ⁽²⁾	6 x 4.0 kW	220-240/380-415	3	4+G	20.4-24.1	Terminal Block	30.9-33.8	51.0-54.0 [193.1-204.4] ⁽¹⁾

(1) Based on standard factory settings: 4.0 minute brew time; 0% prewet; 200°F water.
(2) Requires 3 phase Electrical Power System (Z056).

Measurements

Height 39 3/4" [101.0 cm]	Width 35 1/2" [90.2 cm]	Depth 21 1/2" [54.6 cm]	Empty Weight 195 lbs [88.5 kg]	Filled Weight 311.2 lbs [141.2 kg]	Shipping Weight 197 lbs [89.4 kg]	Shipping Dimensions: 38" x 37" x 24" [96.5 x 94.0 x 61.0 cm]
-------------------------------------	-----------------------------------	-----------------------------------	--	--	---	--

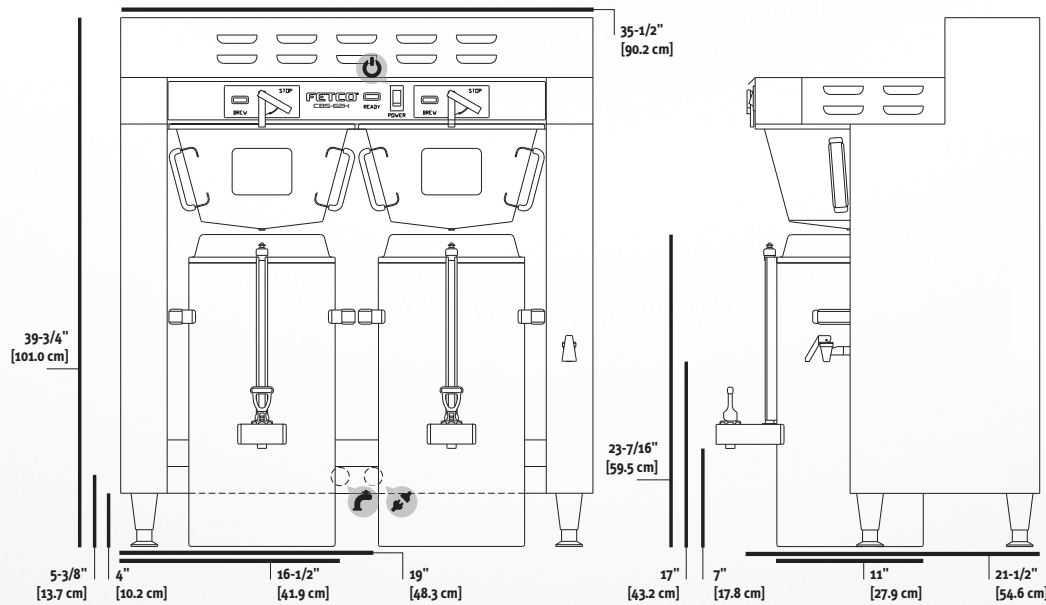

- Electrical Connector
- Water Inlet
- On / Off Switch



Compatible Dispensers

3.0 Gallon LUXUS® Thermal Dispenser (TPD-30)

D012

Paper Coffee Filters

20" x 8" (500 Per Case)

F004

18" x 7" (500/Case) for Half Batch Brew Basket

F005

Cups per Hour*

8oz. **846** 12oz. **576** 16oz. **432** 20oz. **346**

* Approximate based on maximum power setting.

Information

fetco.com

847.719.3000
1.800.338.2699 USA
 847.719.3001

Food Equipment Technologies Co.
600 Rose Road
Lake Zurich, IL 60047
USA