

Furrion ePod™ Power Station + Furrion ePod™ Battery



CHARGE UP TO 6 DEVICES
SIMULTANEOUSLY



2X AC OUTPUT, 3X USB OUTPUT
AND 1X USB C



LONG LIFE
SHELF STORAGE



UP TO 500 CHARGING
CYCLE




MAXIMUM OUTPUT OF
460W AND 800W SURGE
PROTECTION



OVERCURRENT AND
OVERHEAT PROTECTION

Roadtrip/Backyard Party/Beach Day				Camping/Emergency/Disaster Management			
Communication Devices		Recreational Gear		Household Appliances		Emergency Tools	
Watch (1 Wh)	288+ Times	GoPro (5 Wh)	57+ Times	Light (100 W)	2+ Hours	Immersion Heater (300 W)	0.9+ Hours
Phone (10 Wh)	28+ Times	Camera (16 Wh)	18+ Times	Fan (18 W)	16+ Hours	Heating Blanket (206 W)	1+ Hours
Tablet (30h)	9+ Times	Projector (30-60 W)	4.7 - 9.6 Hours	Portable AC (150 W)	1+ Hours	CPAP (40 W)	7+ Hours
Laptop (65 Wh)	4+ Times	Nintendo Switch (16 Wh)	18+ Times	Wi-Fi Router (12-15 W)	19-24 Hours	Water Pump (120-300 W)	0.9-2.4 Hours
Portable Monitor (36W)	8+ Times	Amp (20 W)	14 Hours	Electric Drill (100-150 Wh)	1-2 Times	eRove™ (60 W)	4+ Hours
Projector (45 W)	6+ Times	Drone (60-70 Wh)	4 Times	Foldable Kettle (400 W)	0.7+ Hours		
		eRove™ (60W)	4+ Hours	Electric Grill (400 W)	0.7+ Hours		

*Number of charging cycle and time usage can vary according to condition of use.

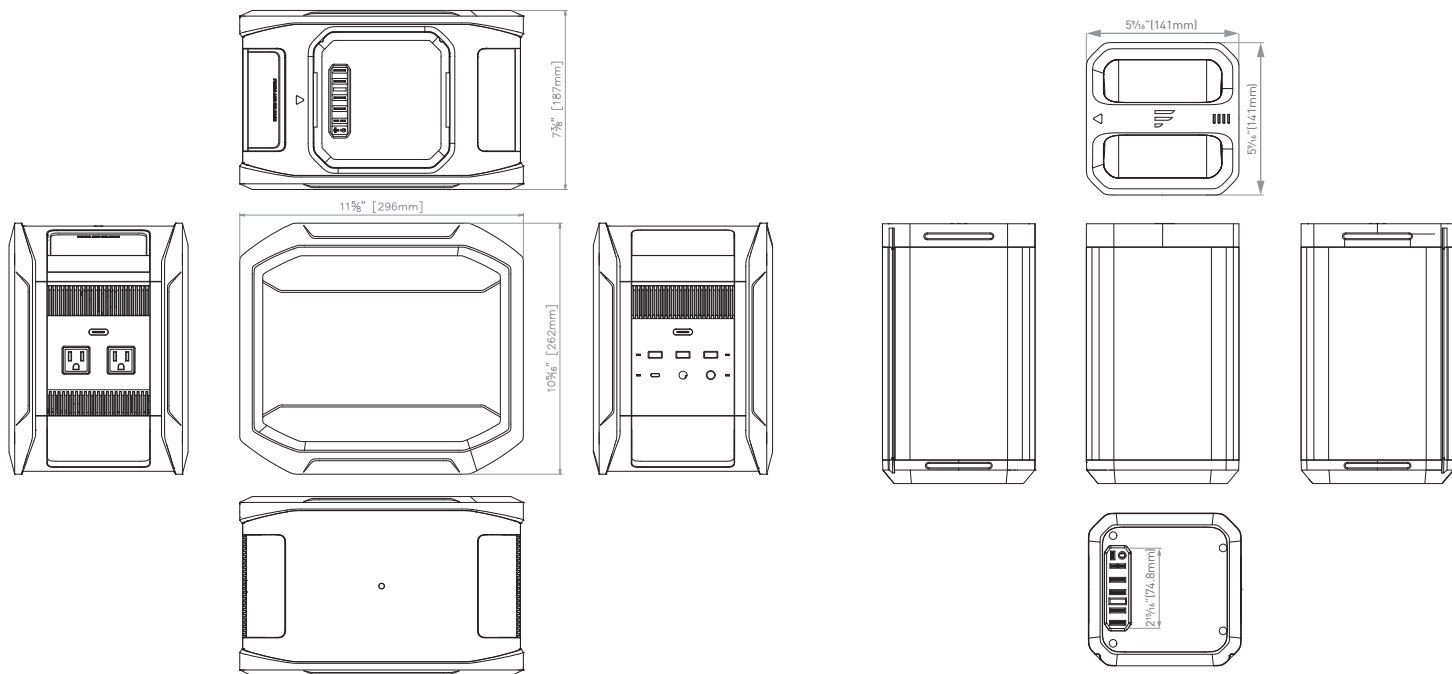

Part Number

Product

FPP04A40-BL



Specifications (Furrion ePod™ Power Station)

AC Outlet (x2)	NEMA 5-15R 120V, 60Hz, pure sine wave,
AC Output	350W continuous - 400W Max 800W surge max
DC Input	6.5mm x 3mm, 10.5 - 24V DC (max. current: 8A)
Solar Input	8mm x 2.5mm, 10 - 22V DC (max. current: 7A)
DC Outputs	
USB-C PD 2.0	5V/3A, 9V/3A, 12V/3A, 20V/3A, 60W max
USB-A QC 3.0	5V/3A, 9V/2A, 12V/2A, 24W max
USB-A (x2)	5V/2.4A each, 24W max

Features

Over Current Protection	✓
Short Circuit Protection	✓
Over Temperature Protection	✓
LCD Display	✓

Dimensions

Product Size (WxHxD)	11.7 x 10.3 x 7.3" (296 x 262 x 187mm)
Weight (lbs/kg)	11lbs / 5kg

Specifications (Furrion ePod™ Battery)

Battery Type	18650 Lithium Ion Cells, 44 total cells
Output Voltage	14.4V
Current	28.6A
Battery Cycles	500 minimum
Built-in Charger Input	10.5V - 24V
Built-in Charger Input Power	<100W
Battery Capacity	412Wh (114,400mAh @3.6V)
Over Charge Voltage Protection	✓
Short Circuit Protection	✓
Automatic Power Cut Off	✓
Over Discharge	✓
Over Current Protection	✓
Material	ABS + Aluminium
Operating Temperature	32-104°F / 0-40°C
Weight (lbs/kg)	9.5lbs / 4.3kg
Product Size (WxHxD)	5.6 x 9.5 x 5.6" (141 x 241 x 141mm)

FPP04A40-BLV1.0

