

LED	UGR <19	160 lm/W	CRI90	DALI	TUNABLE WHITE	3SDCM	5 YEAR WARRANTY
-----	---------	----------	-------	------	---------------	-------	-----------------


**Product Snapshot**

- Seamless continual connection.
- Pre-wired trunking rail with a click-lock design enabling effortless connection.
- Modularization design.
- Convenient installation with easy assembly/disassembly without the use of tools.

Applications:



**Construction**

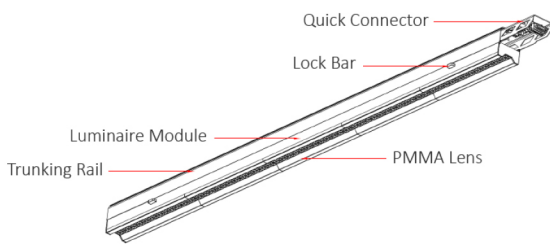

**Specifications**


Power Range: 16W –150W  
 Luminous Efficacy: 160lm/W  
 Colour Temperature: 3000K | 4000K | 5000K | 6500K | Tunable White  
 Lumen Maintenance & Life Expectancy: L90 B50 >50,000h  
 Colour Stability: 3 Step MacAdam  
 CRI: Ra90  
 Glare Rating: UGR<19  
 Light Distribution: Direct  
 Beam Angle: 90°  
 Lens: PMMA  
 Dimming: Non-Dim | DALI | 0-10V | Motion & Daylight Sensor | Emergency  
 Lengths: 2ft 682mm | 5ft 1525mm | 10ft 2935mm  
 Dimensions: W65mm x H77mm  
 Mounting: Surface Mount | Suspended  
 Warranty: 5 Years

**Lumen Options**

2ft 682mm	5ft 1525mm	10ft 2935mm
16W	35W	100W
20W	50W	130W
26W	65W	150W
30W	75W	

Luminous efficacy: 160lm/W

**Photometry: Beam Angle 90°**

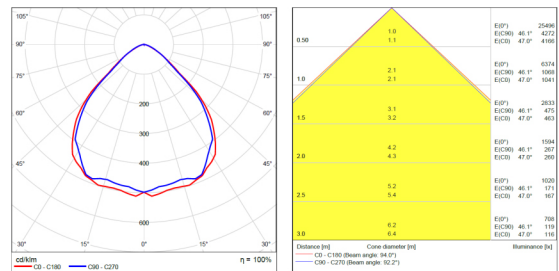

**New World Hutt City**



BEFORE



AFTER