




Wood species Oak **Grade** Classic **Construction** 3-layer T&G Engineered Flooring
Size 15 x 82.55 x 412.75 mm **Finish** UV-Oil

Construction: 3-layer T&G engineered flooring

Dimensions

Thickness	15 mm
Width	82.55 mm
Length	412.75 mm
Cut angle	90°
Microbevel	0.5 mm
Joint type	tongue and groove (T&G)

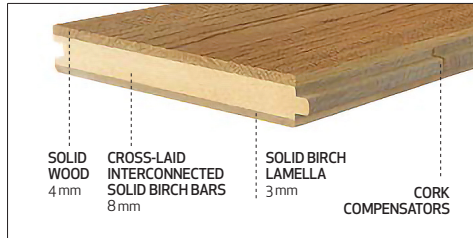

Packaging


Content	1.908 m ²
Weight	20 kg
H x W x L	213 x 344 x 434 mm

box

Deviations

Deviation on thickness	± 0.2 mm	EN13489
Deviation on width	± 0.2 mm	
Height difference	≤ 0.2 % of width	
Cup	≤ 0.2 % of plank width	
Bow	≤ 0.5 % of length	
Spring	≤ 0.5 % of length	

Installation

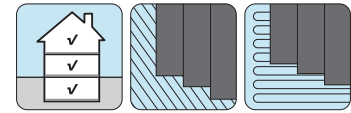


Glue down or float over concrete, plywood or wooden subfloor. Suitable for gluedown installation over radiant heating systems.

Characteristics

Fire resistance	Dfl-s1	EN14342
Formaldehyde emission class	E1	
Pentachlorophenol content	None	
Thermal resistance	0.112 m ² · k/w	
Thermal conductivity	0.170 W/(m·K)	
Structural warranty	Lifetime	

Storage and usage



Air humidity 40% – 65%
Temperature +18 ° – +22 ° C

Finish: UV-OIL

Description

Type of coating	UV-cured modied polyurethane-acrylate
Surface (finish) type	Semi-closed pores, wire brushed
Sheen	Silk matte 3 - 10 GU/60°
Finish warranty	-

Classification surface characteristics

Wear resistance	Not rated	EN 438-2
Scratch resistance	Not rated	EN 438
Slip resistance	50 (SRV dry)	EN 15676
Resistance to chemical agents	Class 5 (Except blue ink)	EN 13442
Repairability	Medium	

Maintenance and care

Maintenance of hardwood floors with Silk Oil finish assumes regular (daily if necessary) cleaning of dust and grit using a vacuum, followed by a thorough cleaning with our recommended Floor Cleaner or other similar product. Floor surface areas that receive the most traffic and get worn down quicker, such as areas by the front door, hallways, kitchens etc., should be periodically renewed with our special Restorative Oil. This product restores the protective surface film. Frequency of use depends on type of interior and intensity of foot traffic. For residential interiors, restorative cleaning should be done once in 3-5 years; for public and commercial interiors with intense foot traffic, it is recommended to use the product 2-4 times a year.

Grade: Classic

Description

Sound sapwood	Permitted contrast to 25% of the plank area
Colour variation	No limit
Knot	Permitted up to 25 mm, filled
Checks	Permitted filled up to 0,5 mm in width

Bark pocket	Permitted up to 50 mm in length, up to 5 mm in width, filled
Pith	Permitted
Slope of grain	Permitted
Medullary ray	Permitted