


# specifications

## SKB1500N-A Series

### ActiveCore Series, 3 Door (Glass), Upright Fridge

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

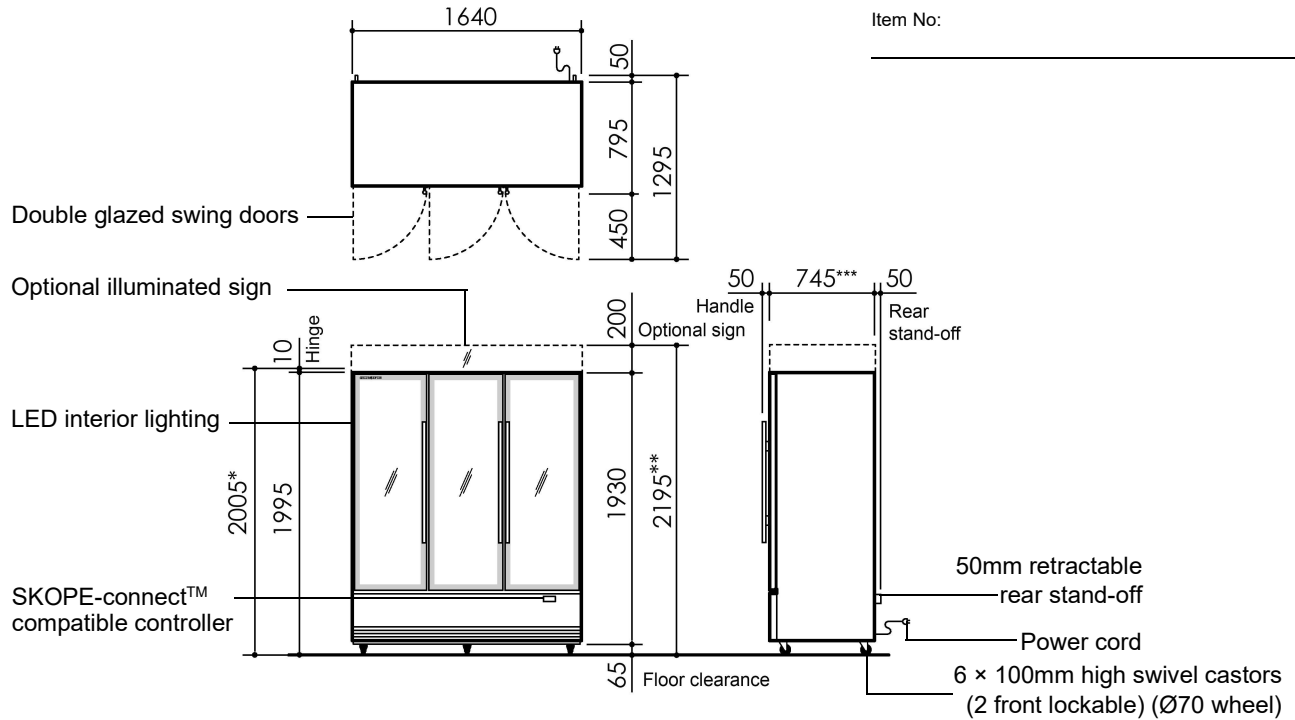

CABINET			
Model ID	SKB1500N-A	SKB1500N-AC	SKB1500N-ACX
Doors	3 x self-closing, double glazed, single Low-E, argon filled, lockable, argon filled, toughened safety glass swing doors (hinged LH, LH, RH)		
Internal door opening	3 x door openings: 1454mm high x 430mm wide		
Shelves	12 x wire and 3 x stainless steel	15 x wire and 3 x stainless steel	15 x wire and 3 x stainless steel
	Wire shelves: Adjustable height, 490 wide x 520 deep (5 each side), 540 wide x 520 deep (5 middle)		
	Stainless steel bottom shelf: Not adjustable, 485 wide x 515 deep (1 each side), 545 wide x 515 deep (1 middle)		
Sign	n.a.	Illuminated sign	Illuminated sign
Material	Powdercoat galvanized steel or stainless steel interior & exterior		
PERFORMANCE			
Max. ambient temp.	40°C		
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)		
GEMS class	M1		
GEMS energy consumption	4.99 kWh/24h	5.26 kWh/24h	5.97 kWh/24h
GEMS annual running cost	\$547 p.a. (@ \$0.30/kWh)	\$576 p.a. (@ \$0.30/kWh)	\$654 p.a. (@ \$0.30/kWh)
ELECTRICAL			
Electrical safety climate class	5		
Interior side lighting	3 x 1370mm, 15W LED	3 x 1370mm, 15W LED	n.a.
Interior shelf lighting	n.a.	n.a.	15 x 415mm, 6W LED
Sign lighting	n.a.	1 x 1590mm, 18W LED	1 x 1590mm, 18W LED
Power cord	Supplied with 2.0m, 10 Amp plug and lead		
Power supply	220-240 Volts a.c. 50 Hz, single phase supply		
Current draw	3.4 Amps (includes unit 2.6 Amps)		
REFRIGERATION			
Controller	SCS Connect (SKOPE-connect™ compatible)		
Connectivity interface	Bluetooth® wireless technology		
Refrigeration system	Bottom mounted, integral, removable ActiveCore refrigeration unit (UBHCNI-008)		
Refrigerant	R290 / 99g (natural refrigerant)		
Nominal capacity	740 Watts		
Heat rejection (Avg/peak)	210 Watts/255 Watts	220 Watts/270 Watts	250 Watts/340 Watts
Drainage	No plumbing required		

DIMENSIONS		
	External	Internal
Height	2005mm* / 2195mm**	1454mm
Width	1640mm	1540mm
Depth	795mm	602mm
Floor area	1.34m <sup>2</sup>	
Weight	330kg	
Gross volume	1433 L	

\* Height 2005mm without sign (SKB1500-A)  
 \*\* Height 2195mm with sign (SKB1500-AC, SKB1500-ACX)  
 \*\* Depth 745mm excludes removable door handle, door lock bracket and rear stand-off

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Top	50mm
Sides	Not required
Back	50mm
Bottom	50mm

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

**SKOPE INDUSTRIES LIMITED**

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

SPS0574 Rev. 2.1 Aug. 2020

