ChargePort | TA-7800U-B



SPECIFICATION

TeleAdapt-designed desktop charging solution. Allows hotels to place AC and USB power outlets where guests need them most. Conveniently located outlets provide the power source guests need to charge smartphones, tablets, laptops and other portable devices. Perfect for bedside placement so guests can comfortably use their device while it's charging. Optional cable management feature provides additional connectivity at the desk or nightstand.



The perfect convenient Nightstand power solution for guests

- Provides guests with four easy-to-find charging outlets.
- Uniquely designed to sit on desk or nightstand.
- Two AC outlets and two USB device charging ports
- High-current/fast-charging USB port.
- Engineered for safety with 10-Amp integrated circuit breaker.
- Simple to install, durable construction for everyday use.
- Ethernet cable and other cable options available and sold separately.
- Optional mounting plate for secured horizontal and vertical mounting (sold separately)
- Top surface can be branded or used for guest instructions




Cable management.


Optional cable chamber allows you to utilize one product for both power charging and desktop cable management.

ChargePort | TA-7800U-B

teleadapt

SPECIFICATION

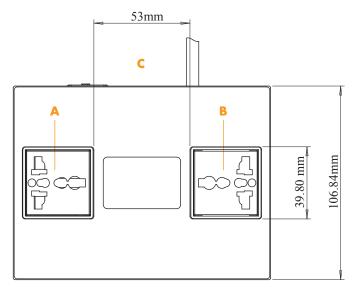

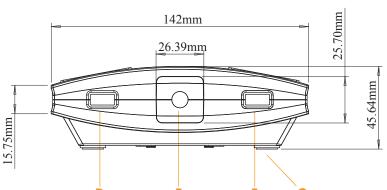



H Single-Cable Grommet



Dual-Chamber Grommet



J Cable Chamber Cover

Features

- A Universal 100-240V**
- B Universal 100-240V**
- C Ethernet Cable 1.8m (6ft) (optional)
- D 1.0 Amp High-Current USB Port
- E 2.1 Amp USB Port (optimized for tablet computers)
- F Cable Chamber (see grommet options)
- G Mounting Plate (sold separately)
- H Single-Cable Grommet (included)
- I Optional Dual-Cable Grommet (included)
- J Optional Cable Chamber Cover (included)
- K Power Supply Cable, 2.44m (8ft)
- L Overload Protect Switch

Available Colours

Black

Keeping Your World Connected $^{\rm TM}$ is a trade mark of TeleAdapt, Inc. All rights reserved. All copyrights and trademarks acknowledged.



General Product Information

Weight: Base 0.9 lbs

Base plus PSU cable 1.8 lbs.

Height: 1.80" (45.64 mm)

Footprint: 5.6" W x 4.2" L (142mm x 106.8mm)

Optional Mounting Plate (sold separately)

Flat surface mount or right angle edge mount available.

Ask your sales rep for more info.

Certifications

Universal sockets are not available with approvals.

** Universal Plug Configurations cannot be installed in EU or US

web: www.teleadapt.com email: info@teleadapt.com