



TS 97Cam-action door closer





Two strong global brands— Dorma and Kaba – have combined forces and are now offering you a comprehensive portfolio of smart & secure access solutions, all from one, reliable source. Our new product portfolio includes everything from locks and keys to a fully networked electronic access solution, and everything from door closers and automatic doors to a mobile partition system.

All supported by a comprehensive service network.

A perfect combination of form and function

The dormakaba TS 97 is able to offer a very compact surface-mounted cam-action door closer available in the project sector. Single-piece face plates with internal end caps and uniform lengths of the door closer body and slide channel characterise the impressive design credentials of this product.

Like all dormakaba cam-action door closers, the TS 97 features the proven heart-shaped cam for maximum user convenience based on minimum opening effort. With its compact dimensions, the TS 97 ideally complements the overall appearance of any door.

Benefits

For the trade

- One closer model for all applications to simplify materials management and stocking.
- · Single pack for easy handling.

For the installer/fabricator

- · Universally applicable on both LH and RH doors.
- Quick and easy to fix with mounting bracket.

For the architect/specifier

- High-quality architectural solution for superior interior designs.
- Uniform lengths of body and slide channel for enhanced harmony of appearance.
- · Single-piece faceplate without slots or fixing points.

For the user


- High ease of use and fully controlled, reliable closing with adjustable latching action.
- Limiting stop unit as standard to protect the wall and door.

Force profile



The heart-shaped cam and linear drive mechanism of the TS 97 ensure that the resistance encountered decreases almost instantly with the door opening action – so even children, the elderly and people with disabilities have no problem in passing through. User-friendly and reliable closing is also ensured by the delayed increase in the actuating torque at the 'latching' end of the sweep.



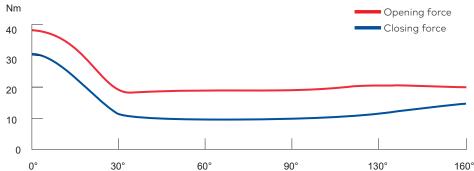

Specifications

| Data and features | | TS 97 |
|---|-----------------------------------|-----------------|
| Closing force adjustable | Size | EN 2 – 4 |
| Standard doors ¹⁾ | ≤ 1100 mm | • |
| External doors, outward opening ¹⁾ | | - |
| Fire and smoke check doors ¹⁾ | | - |
| Non-handed | | • |
| Arm assembly | Slide channel | • |
| Closing speed adjustment by valve | | • |
| Latching action adjustment by valve | | • |
| Cushioned limit stop | | • |
| Delayed action | | - |
| Backcheck | | - |
| Hold-open | | 0 |
| Weight in kg | | 2.5 |
| Dimensions in mm | Length Overall depth Height | 340 37 49 |
| Door closer compliant with EN 1154 | | • |
| C€ -mark for construction products | | • |
| ● yes - no O option | | |

1). In the case of particularly heavy doors and doors that have to close against wind pressure, we recommend the dormakaba TS 93.

Cam-action door closer in Contur Design with rapidly decreasing opening torque, conforming to EN 1154, carries the CE mark. Uniform lengths of door closer body and slide channel. Closing force EN 2 – 4, closing speed and latching action adjustable. Non-handed. With standard slide channel and cushioned limit stay.

Make


dormakaba TS 97

Accessories


- Mechanical hold-open device
- Glass door shoe

Colour

- Silver
- White (sim. to RAL 9016)
- Stainless steel "Design"
- Polished brass "Design"
- Special colour _____ (sim. to RAL _____)

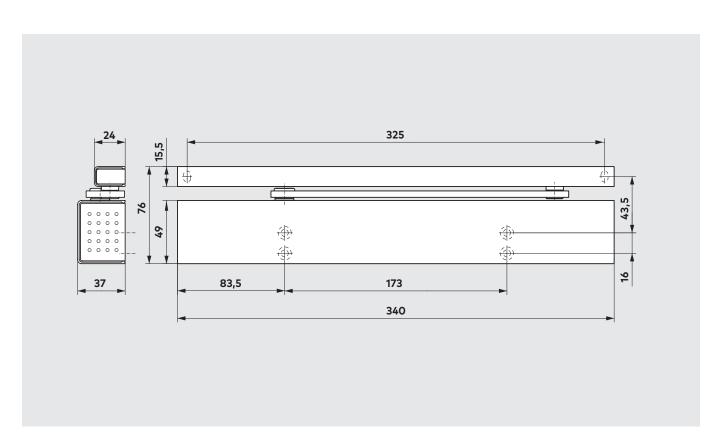


Door leaf fixing, pull-side

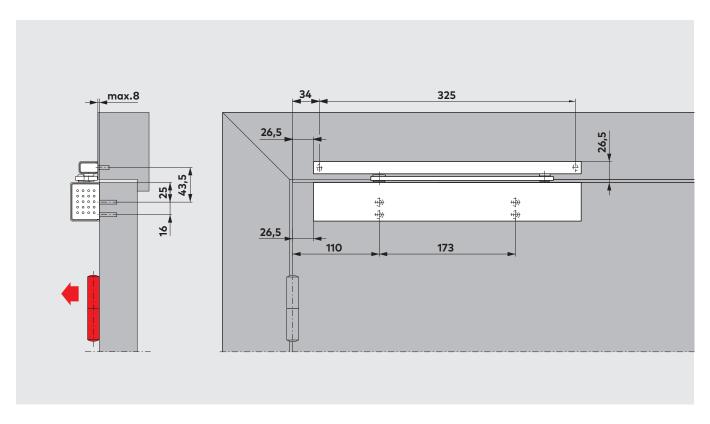


(example: LH/ISO 6 door; mirror image for RH/ISO 5 door)

Transom fixing, pull side

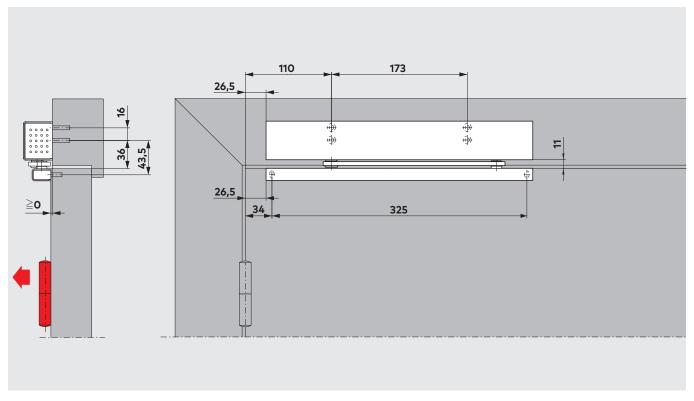


(example: LH/ISO 6 door; mirror image for RH/ISO 5 door)

Accessories




Glass door shoe for TS 97

For fixing the closer to toughened glass doors – no glass drilling or recessing required. The TS 97 with glass door shoe is to be used with dormakaba ARCOS Studio and ARCOS Office/Junior Office hinges.

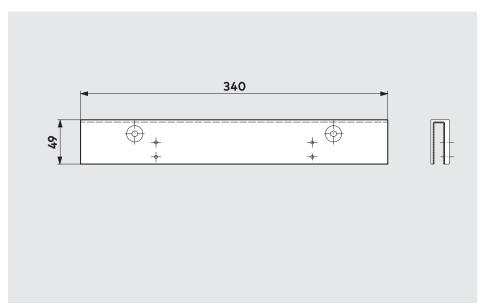

Standard equipment and accessories

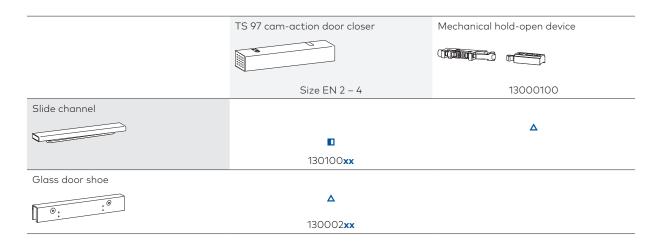

Order No.

Closer body with slide channel, complete

▲ = Accessory

Colour

Silver White (sim. RAL 9016) Special colour

хх

01 11 09

Also available in "Design" finishes:

Stainless steel "Design" 04
Polished brass "Design" 05

Note: "Design" refers to the surface finish of the products



01 Silver



11 White




04 Stainless steel "Design" finish



05Polished brass
"Design" finish

Standard and optional functions

The functions of the TS 97 can be individually adjusted to each door situation and matched to varying requirements. The closer speed of the TS 97 can be infinitely adjusted by means of a valve, and there is a second valve for adjusting the latching action. The closing force is adjustable between EN 2 and 4 by means of a screw.







- **01** Infinitely adjustable closing speed in the range 150° 0°.
- 02 Infinitely adjustable latching action in the range 7° 0°.
- **03** Adjustable closing force.

The integral cushioned limit stay of the TS 97 features progressive damping and helps to prevent a normally opened door from colliding with the adjacent wall. It can be adjusted to an opening angle between 80° and max. 120°.

The cushioned limit stay is not an overload protection device and in many cases is no substitute for a door stop.








The mechanical hold-open device enables doors to be held without fallback at an opening angle up to approx. 120°. The hold-open device is suitable for both LH and RH doors and is designed for retrofitting into the slide channel.

Not suitable for fire and smoke check doors.









Door Hardware



Entrance Systems



Electronic Access & Data



Interior Glass Systems



Lodging Systems



Mechanical Key Systems



Safe Locks



Services

dormakaba Australia

Head Office 12-13 Dansu Court Hallam VIC 3803 T 1800 675 411 info.au@dormakaba.com www.dormakaba.com.au

dormakaba New Zealand

Head Office Building P, 61-69 Patiki Road Avondale, Auckland 1026 T: 0800 436 762 info.nz@dormakaba.com www.dormakaba.co.nz