Up Down Sconce
Technical Specifications





# Up Down Sconce

## **Technical Specifications**

Materials	Steel
Product weight	1.5 lbs
Lead time	2 weeks
Bulbs included (2)	E12 / 120V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
Dimmer	TRIAC
Max wattage	20 W
Certifications	UL listed, damp-rated







## Notes


1. This fixture may be installed horizontally if desired (hardwire version without a dimmer switch only).


Updated August 21, 2023

In Common With Up Down Sconce incommonwith.com

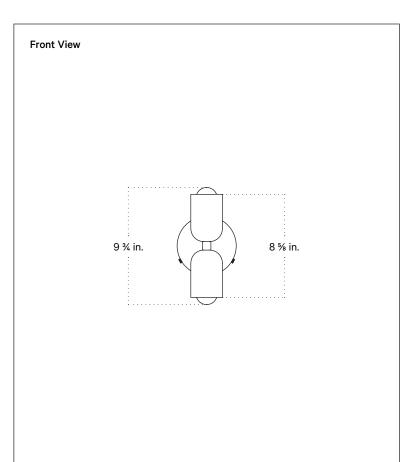

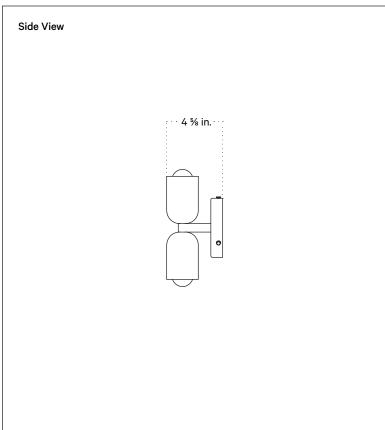

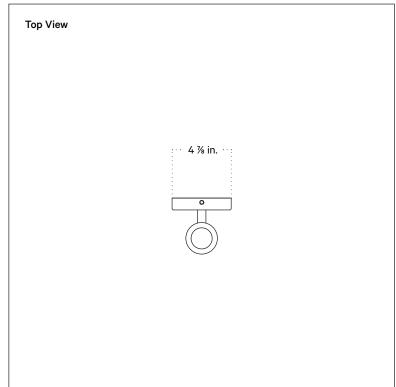

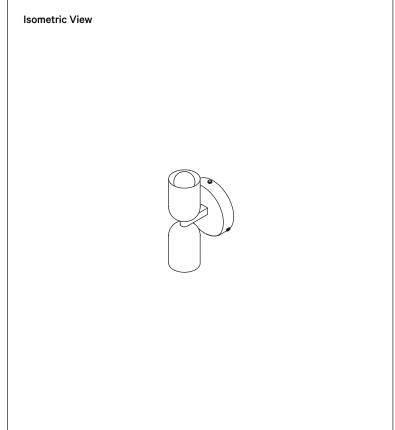



# Up Down Sconce, Left Switch

### **Technical Specifications**

Materials	Steel
Product weight	1.5 lbs
Lead time	2 weeks
Bulbs included (2)	E12 / 120V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
Dimmer	Integrated dimmer switch
Max wattage	20 W
Certifications	UL listed, damp-rated







### Notes


This fixture can be specified with a rotary dimmer switch installed on its base.
 The dimmer switch can be located on either the left or right side of the shades.


Updated August 21, 2023

In Common With Up Down Sconce incommonwith.com

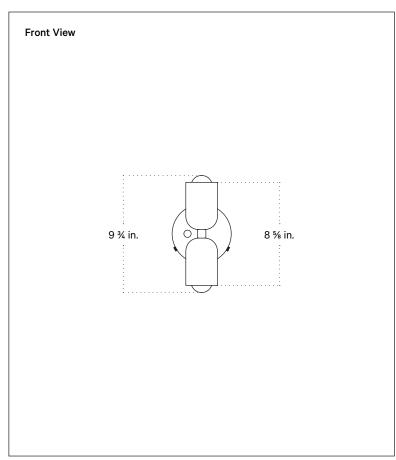

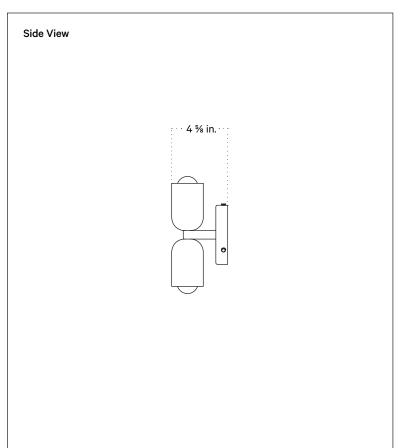

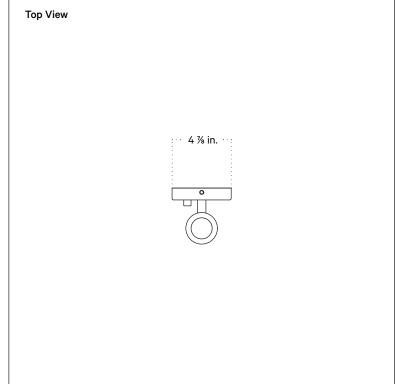

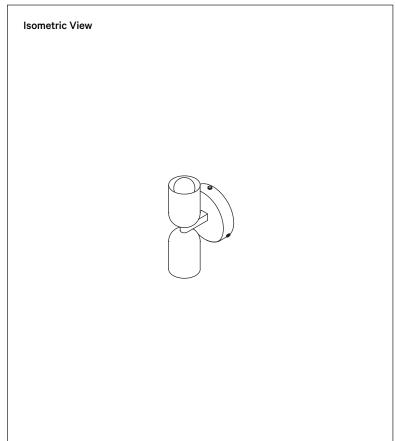



# Up Down Sconce, Right Switch

### **Technical Specifications**

Materials	Steel
Product weight	1.5 lbs
Lead time	2 weeks
Bulbs included (2)	E12 / 120V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
Dimmer	Integrated dimmer switch
Max wattage	20 W
Certifications	UL listed, damp-rated







### Notes


1. This fixture can be specified with a rotary dimmer switch installed on its base. The dimmer switch can be located on either the left or right side of the shades.


Updated August 21, 2023

In Common With Up Down Sconce incommonwith.com

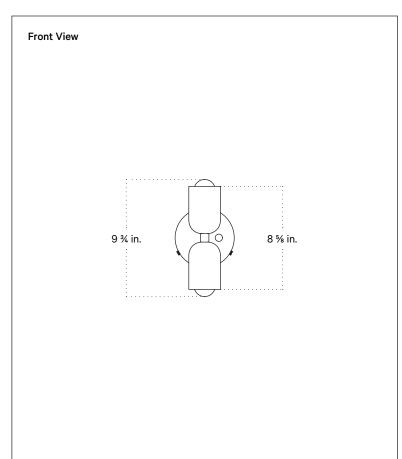

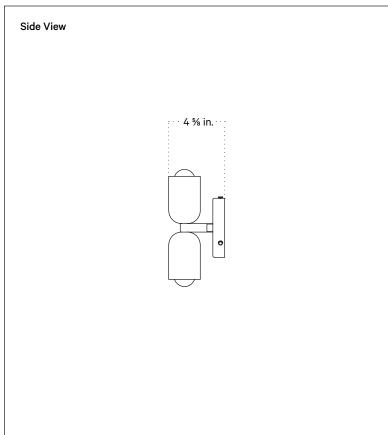

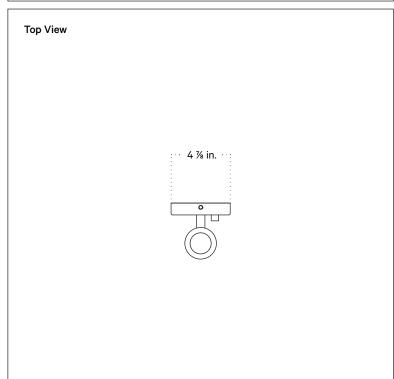

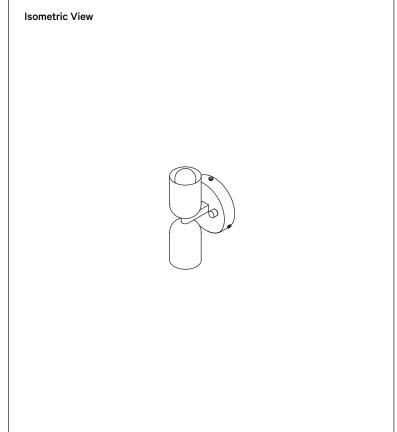



## Up Down Sconce, Plug-in

### **Technical Specifications**

Materials	Steel
Product weight	2 lbs
Lead time	2 weeks
Bulbs included (2)	E12 / 120V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
Dimmer	Optional in-line dimmer switch
Cord length	16 ft
Max wattage	20 W
Certifications	UL listed, damp-rated








#### Notes


- This fixture can be ordered with an on/off switch or an inline dimmer; see additional details below.
- 2. The plug-in version of this fixture with an inline on/off switch will be supplied with a Porcelain I E12 / 110v / 3.0 W / 180 lm / 2700 K bulb.
- 3. Fixtures ordered in painted metal with an on/off switch come with a 16-foot black fabric cord. The on/off switch is located 8 feet from the plug.
- 4. Fixtures ordered in painted metal with an inline dimmer have a 16-foot black nylon cord. The dimmer switch is our black painted metal finish and is located 8 feet from the plug.
- 5. Custom cord color can be specified for an additional cost; please inquire.

Updated August 21, 2023

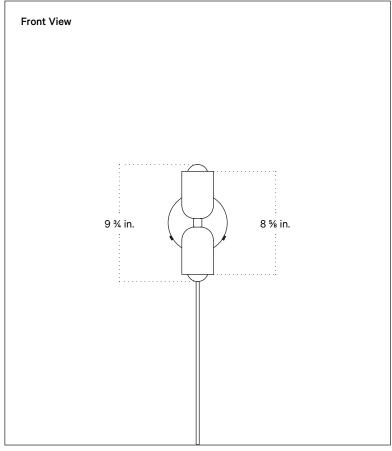

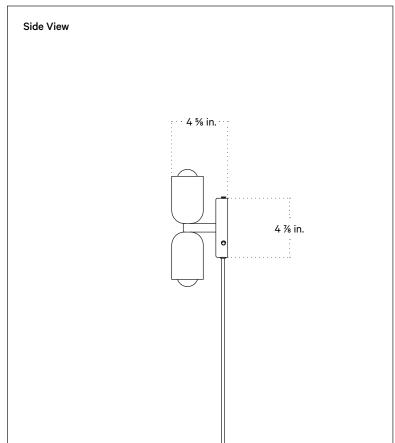

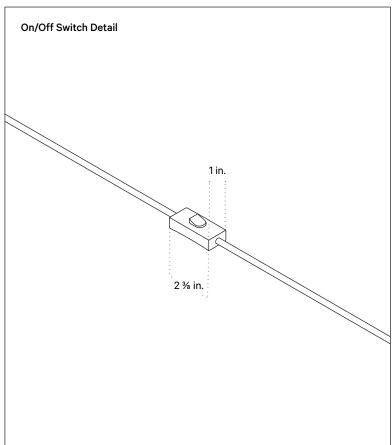

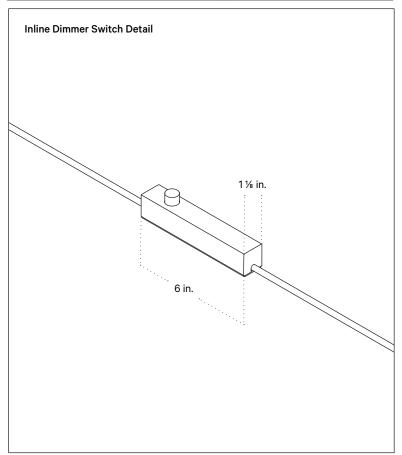



## Up Down Sconce, Plug-in Left Switch

#### **Technical Specifications**

Materials	Steel
Product weight	2 lbs
Lead time	2 weeks
Bulbs included (2)	E12 / 120V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
Dimmer	Integrated dimmer switch
Cord length	10 ft
Max wattage	20 W
Certifications	UL listed, damp-rated





#### Notes


- This fixture can be ordered with an on/off switch or an inline dimmer; see additional details below.
- 2. The plug-in version of this fixture with an inline on/off switch will be supplied with a Porcelain I E12 / 110v / 3.0 W / 180 lm / 2700 K bulb.
- 3. This fixtures comes with a 10 foot black nylon cord,
- 4. Fixtures ordered in painted metal with an on/off switch come with a 16-foot black fabric cord. The on/off switch is located 8 feet from the plug.
- Fixtures ordered in painted metal with an inline dimmer have a 16-foot black nylon cord. The dimmer switch is our black painted metal finish and is located 8 feet from the plug.
- 6. Custom cord color can be specified for an additional cost; please inquire.
- 7. This fixture can be specified with a rotary dimmer switch installed on its base.


  The dimmer switch can be located on either the left or right side of the shades.


Updated August 21, 2023


In Common With

Up Down Sconce incommonwith.com

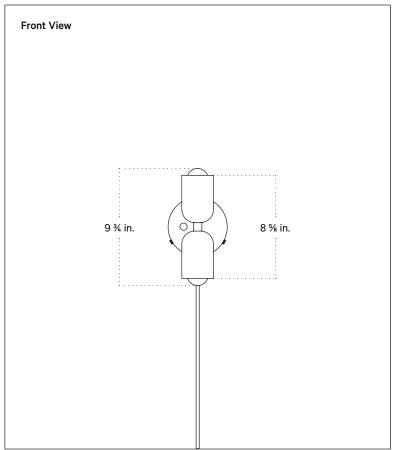

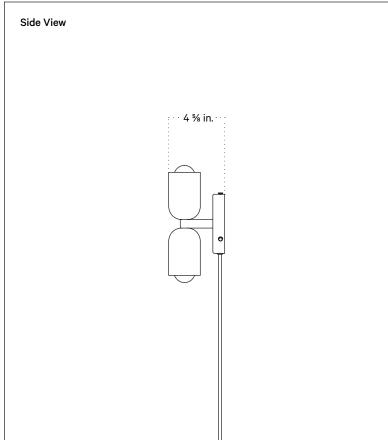

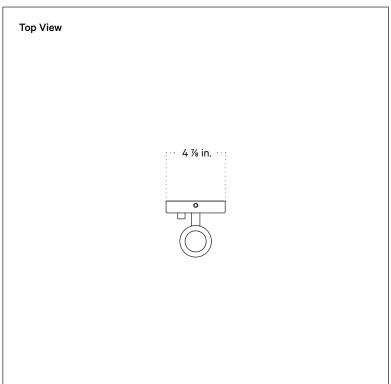

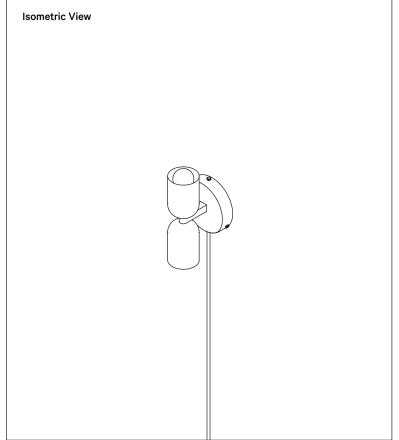



## Up Down Sconce, Plug-in Right Switch

#### **Technical Specifications**

Materials	Steel
Product weight	2 lbs
Lead time	2 weeks
Bulbs included (2)	E12 / 120V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
Dimmer	Integrated dimmer switch
Cord length	10 ft
Max wattage	20 W
Certifications	UL listed, damp-rated







#### Notes


- 1. This fixture can be ordered with an on/off switch or an inline dimmer; see additional details below.
- 2. The plug-in version of this fixture with an inline on/off switch will be supplied with a Porcelain I E12 / 110v / 3.0 W / 180 lm / 2700 K bulb.
- 3. This fixture comes with a 10 foot black nylon chord.
- 4. Fixtures ordered in painted metal with an on/off switch come with a 16-foot black fabric cord. The on/off switch is located 8 feet from the plug.
- 5. Fixtures ordered in painted metal with an inline dimmer have a 16-foot black nylon cord. The dimmer switch is our black painted metal finish and is located 8 feet from the plug.
- 6. Custom cord color can be specified for an additional cost; please inquire.
- 7. This fixture can be specified with a rotary dimmer switch installed on its base. The dimmer switch can be located on either the left or right side of the shades.


Updated August 21, 2023

In Common With Up Down Sconce incommonwith.com

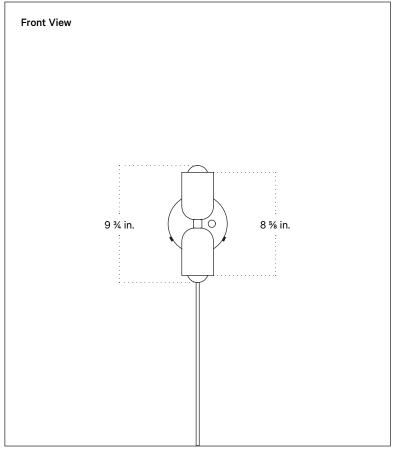

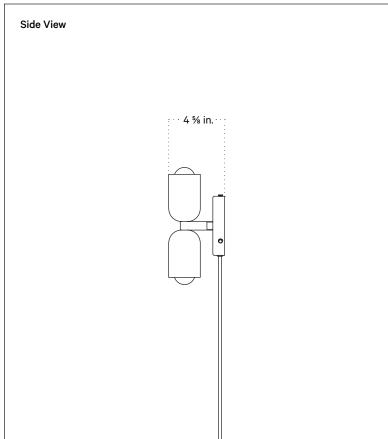

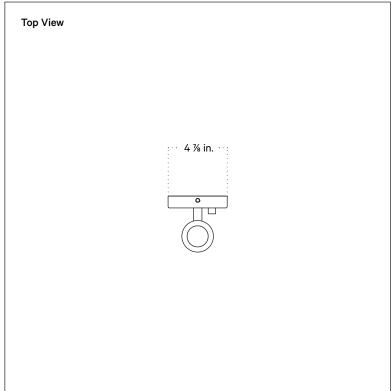

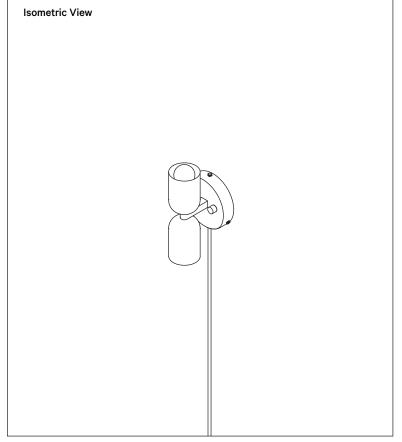

Brass, glass, and ceramic samples made or finished by hand may exhibit variability. Available for purchase at <u>incommonwith.com/finishes</u>.

## Painted Metal

