


FP

NUMERICALLY CONTROLLED POSITIONING STOP

WOOD be nice.

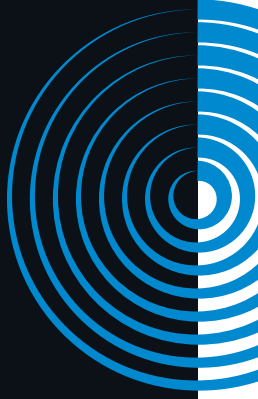

OMEGA

RADIAL 900 (with FP)



T 50 350 OP (with FP)



FP


NUMERICALLY CONTROLLED POSITIONING STOP

Numerically controlled length stop, available in lengths from 2 to 6 meters, ideal to satisfy the widest range of requirements, both associated to OMGA machines or any other machine brand and kind. 7" Touch Screen control, with a ability to memorize cutting cycles on a Micro SD card. Possibility to be linked to an external PC through Ethernet RJ45 port. USB port for programming and updates. Three available software: length stop software, programmable pusher software, specific software for

cutting picture frames mouldings. The length stop can be completed with different support tables (simple sliding tables or roller tables of different widths), various stop assemblies (90° spring loaded stop, stop with gripper, 45° stop) and with mechanical and electrical connection kits.



OPTIONAL

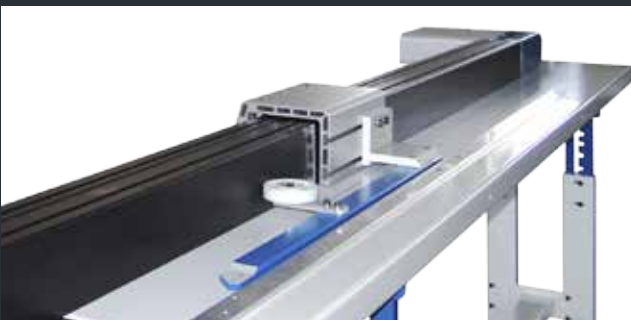

45° Bracket stop (V235 FNC)



Precision linear encoder




Double bracket stop with shock absorber: RIGHT or LEFT



Link kit to

V 235 FNC (with FP)

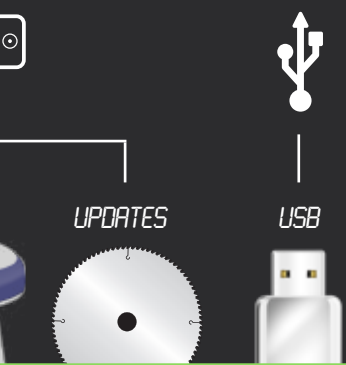

UPDATES

USB


SOFTWARE

- Length stop
- Programmable pusher
- Length stop For Frames




3000

2000



Mitre saw



Link kit to radial arm saw




Safety kit




Label printer










Bar code reader

mm	FP 2000	FP 3000	FP 4000	FP 5000	FP6700
A	2743	3743	4743	5743	7443
B	490				
C	600				
	495	605	715	825	1010
A	2680	3680	4680	5680	7360
B	345				
C	235				
A1	2680	3680	4680	5680	--
B1	205				
D	440				
H*	* 800 - 1000				

 Table extension width

A	2700	3700	4700	5700	7400
B	350 MITRE SAWS				
	600 RADIAL SAWS				
C	240 MITRE SAWS				
	490 RADIAL SAWS				
H	* 800 - 1000				
	1100	1320	1870	2200	2400
	MITRE SAWS				
	1520	1860	2630	3040	3400
	RADIAL SAWS				

	Adjustable feet, with three preset positions.
	kg 50
	kg 70
	Feed speed 60 m/min
	1,0 kw - 110 / 230 V 10 / 5 A - 50 / 60 Hz
	Operating temperature 5° ÷ 45° C
	Humidity (without condensation) 5% ÷ 85%



2900204548.02

DIERREGI SRL

VIA DELLA SCIENZA 5
41012 CARPI (MO) - ITALY
PHONE: +39.059.803.0103
FAX: +39.059.803.0113
COD. FISCALE E P.IVA:
03601330362

WWW.OMGA.IT

OMGA[®]
WOOD be nice.