



HD 901 B

Cold water high-pressure cleaner with Honda 9hp petrol engine for use where no electrical connection is available.



1 Maximum performance

- 3 cylinder axial piston engine features brass cylinder heads for an exceptionally long service life.
- Kärcher direct-driven high-pressure pumps offer high performance and reliable service.

2 Maximum independence

- Honda or Yanmar motors ensure a long service life.
- Diverse performance classes for optimal use.

3 Optimum ease of use

- Automatic engine cut-out with low oil level.

4 Outstanding mobility

- Pneumatic tyres for easy manoeuvrability.
- Balanced centre of gravity and ergonomic design.



HD 901 B

- Triple nozzle (0°/25°/40°)
- Easy press trigger gun
- Stainless steel spray lance

Technical data

Order No.		1.810-977.0
EAN code		4039784730557
Operating pressure	bar / MPa	10-200 / 1-20
Max. pressure	bar / MPa	230 / 23
Flow rate	l/h	200-750
Max. water feed temperature	°C	60
Engine type		GX 270/Petrol
Engine manufacturer		Honda
Weight	kg	54
Dimensions (L x W x H)	mm	1045 × 582 × 670

Equipment

Trigger gun		Easy-press trigger gun
Trigger gun with soft grip		■
High-pressure hose	m	15
Spray lance	mm	1050
Triple nozzle (0°/25°/40°)		Touchless
Anti-twist system (AVS)		■
Servo Control		-

■ Included in delivery.

ACCESSORIES FOR HD 901 B

1.810-977.0

KÄRCHER



		Order No.	ID	Max. working pressure	Length		Price	Description	
Standard with unions on both sides									
High-pressure hose packaged	1	6.391-342.0	ID 8	315 bar	10 m				▲
High-pressure hose, 15 m DN 8, 315 bar, including rotary coupling	2	6.390-010.0	ID 8	315 bar	15 m			With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose, 20 m DN 8, 315 bar, extension	3	6.390-031.0	ID 8	315 bar	20 m			With M 22x1.5 union at both ends and anti-kink protection ID 8/155°C/315 bar	▲
High-pressure hose, 30 m DN 8, including rotary coupling	4	6.390-293.0	ID 8	315 bar	30 m			With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose, 15 m DN 10, 220 bar, extension	5	6.390-023.0	ID 10	220 bar	15 m			15 m high-pressure hose M 22 x 1.5) with kink protection and threaded couplings at both ends. Further data: DN 10/155°C/220 bar.	▲
Longlife 400 with unions on both sides									
High pressure hose DN 6, 10 m, drehbar, l	6	6.391-883.0	ID 6	400 bar	10 m			With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, 10 m, DN 8, including rotary coupling	7	6.388-083.0	ID 8	400 bar	10 m			10 m high-pressure hose Longlife 400 (DN 8) with rotary coupling, two layer high-strength steel wire reinforced. Connectors at both ends. M 22 x 1.5, with kink protection.	▲
High-pressure hose packaged	8	6.391-354.0	ID 8	400 bar	10 m				▲
High-pressure hose Longlife 400, 15 m, DN 8, including rotary coupling	9	6.389-709.0	ID 8	400 bar	15 m			With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, 20 m, DN 8, extension	10	6.390-027.0	ID 8	400 bar	20 m			with rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, 30 m DN 8, including rotary coupling	11	6.390-294.0	ID 8	400 bar	30 m			With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose 1.5 m, DN 8, including connectors	12	6.390-178.0	ID 8	400 bar	1.5 m			1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).	□
Food industry version with unions on both sides									
High-pressure hose, 10 m ID 8, suitable for food industry, extension piece	13	6.389-479.0	ID 8	250 bar	10 m			10 m high-pressure hose (DN 8) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. M 22 x 1.5 with anti-kink sleeve.	▲
High-pressure hose, 20 m ID 8, suitable for food industry, extension piece	14	6.389-581.0	ID 8	250 bar	20 m			20 m high-pressure hose (DN 8) with swivel coupling. Non-discolouring outer layer for use in the food industry. Connectors at both ends, M 22 x 1.5, with kink protection. NW 8/155°C/250 bar.	▲
Longlife food industry version with unions on both sides									
High pressure hose food DN 8 / 10 m	15	6.391-864.0	ID 8	400 bar	10 m			Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose food industry 400 bar, 20 m, DN 8, including rotary coupling	16	6.391-887.0	ID 8	400 bar	20 m				▲
Standard									
HD-Schlauch DN 6, 15m	17	6.391-394.0	ID 6	250 bar	15 m				■
High-pressure hose, 10 m DN 8, AVS trigger gun connector	18	6.390-025.0	ID 8	315 bar	10 m			10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	□
High-pressure hose, 15 m DN 8, AVS trigger gun connector	19	6.390-185.0	ID 8	315 bar	15 m			15 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0

KÄRCHER



		Order No.	ID	Max. working pressure	Length	Price	Description	
High-pressure hose, 20 m DN 8, AVS trigger gun connector	20	6.390-171.0	ID 8	315 bar	20 m		20 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	<input type="checkbox"/>
Longlife 400								
High pressure hose DN 6, 10 m, Longlife	21	6.391-882.0	ID 6	400 bar	10 m		With patented AVS connection in the trigger gun (pivot-mounted).	<input type="checkbox"/>
High-pressure hose packaged	22	6.391-351.0	ID 8	400 bar	10 m			<input type="checkbox"/>
Food industry version								
High-pressure hose 15 m ID 6, AVS trigger gun connector 11 mm, suitable for food industry, grey	23	6.391-654.0	ID 6	250 bar	15 m		15 m high-pressure hose (DN 6) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. DN 6/155°C/250 bar.	<input type="checkbox"/>
Longlife food industry version								
High-pressure hose Longlife 400, 15 m, ID 6, AVS trigger gun connection	24	6.391-888.0	ID 6	400 bar	15 m		Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With patented AVS connection in the pistol (pivot mounted)	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0

KÄRCHER



		Order No.	Flow rate				Price	Description	
Easy Press high-pressure gun with holding power reduction (Kärcher patent)									
Easy press high-pressure trigger gun with softgrip	1	4.775-463.0						Easy press high-pressure trigger gun with softgrip. For high-pressure hoses DN 6 and DN 8 with 11 mm swivel diameter.	■
Trigger guns									
High end high-pressure trigger gun	2	4.775-823.0							□
Quick connect									
Quick coupling	3	6.401-458.0						For quick change of different spray lances and accessories. Optimum adaption to Kärcher accessories, especially for connection between trigger gun and spray lance. With M22 x 1,5 female.	□
Plug nipple	4	6.401-459.0						Hardened stainless steel nipple for quick coupling 6.401-458. With M22 x 1,5 male.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0

KÄRCHER



		Order No.	Max. working pressure	Nozzle size			Price	Description	
Triple nozzle, touchless changeover									
Triple jet nozzle 037	1	4.767-016.0		37				Triple nozzle with high-pressure pencil jet (25°) and low-pressure fan jet (40°). Fast and easy jet changeover by turning the nozzle.	■
Triple nozzle, touchless changeover	2	4.767-112.0		40					□
Triple nozzles									
Triple nozzle 038	3	4.767-149.0	300 bar	38				Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For high-pressure cleaners with injector; low-pressure fan jet for detergent removal and application. Connector M 18x1.5.	□
Dirt blaster, large									
Dirt blaster 04	4	4.763-252.0	300 bar	40				The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	□
Inaktiv									
Dirt blaster - with changeover to low pressure cleaning agent intake	5	4.763-950.0	300 bar	40					□
Inaktiv									
Dirt blaster with changeover to fan jet	6	4.763-956.0	300 bar	40					□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0

KÄRCHER



		Order No.	Max. working pressure	Length			Price	Description	
Rotating spray lances									
1050 mm lance, rotatable, ergonomic	1	4.760-660.0	300 bar	1050 mm				1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	■
Rotatable lance, 600 mm, ergonomic	2	4.760-664.0	300 bar	600 mm				600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Lance 850 mm, rotatable, ergonomic	3	4.760-663.0	300 bar	840 mm				850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Lance 1550 mm, rotatable, ergonomic	4	4.760-661.0	300 bar	1550 mm				1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Lance 2050 mm, rotatable, ergonomic	5	4.760-662.0	300 bar	2050 mm				2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
Spray lances									
Anti-vibration lance	6	6.415-951.0	250 bar	950 mm				The spring-loaded 360° loop handle significantly reduces the vibrations on the spray lance, reducing the physical burden on the user, e.g. when working with the dirt blaster.	□
Spray lance									
Lance 250 mm, non-rotatable	7	4.760-667.0		250 mm				250 mm stainless steel lance. With manual coupling. Non-rotatable.	□
Double lance									
Double lance 960 mm	8	6.394-665.0	310 bar	960 mm				960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	□
Variable pressure spray lance									
Variable pressure spray lance	9	4.760-362.0		670 mm				670 mm variable pressure lance with integrated pressure gauge. Variable pressure adjustment on the handle. Nozzle connector: M 24 x 1.5. Low pressure detergent application.	□
Variable pressure lance	10	4.760-230.0		1040 mm				1040 mm pressure adjustable lance with integrated pressure gauge. Variable pressure adjustment on the handle. Nozzle connector: M 24 x 1.5. Low pressure detergent application.	□
Adapter for variable pressure spray lance									
Adapter for variable pressure lance	11	4.762-075.0						For items 4.760-230 and 4.760-362 for mounting accessories to lance, M 24/18 x 1.5	□
Angular spray lance									
WC and gutter lance	12	4.760-073.0						Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	□
Flexible spray lance									
Flexible lance 1050 mm	13	6.394-654.0	210 bar	1050 mm				1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	□
Telescopic spray lance									
Telescopic jet pipe	14	6.394-690.0	225 bar						□
Restraint belt for telescopic jet pipe	15	6.373-987.0						Convenient strap for relief when working with the telescopic spray lance (6.394-690). The burden is optimally distributed on the body and longer periods of use are possible.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0



		Order No.	Max. working pressure	Length			Price	Description	
Gutter cleaner									
Gutter cleaning lance	16	2.642-305.0						The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	<input type="checkbox"/>
Undercarriage spray lance									
Underbody lance	17	4.760-245.0		700 mm				Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0




		Order No.					Price	Description	
Miscellaneous									
Backflow check valve	1	6.412-578.0						To prevent cleaning agent from entering the drinking water system at low supply pressure.	<input type="checkbox"/>

■ Included in delivery. ☐ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0

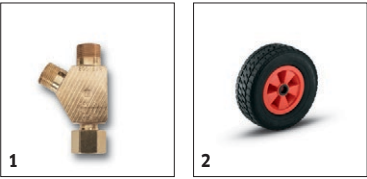

		Order No.					Price	Description	
Y distributor									
Y distributor	1	4.405-048.0							<input type="checkbox"/>
Set of puncture-proof wheels									
Set of puncture-proof wheels	2	2.851-067.0							<input type="checkbox"/>

■ Included in delivery. ☐ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0

KÄRCHER




		Order No.	Flow rate	Nozzle size	Diameter	Price	Description	
Hard surface cleaner FRV 30								
FRV 30	1	2.642-999.0						<input type="checkbox"/>
Add-on kit rubber lip	2	2.642-910.0					For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.	<input type="checkbox"/>
Extension hose 5 m	3	4.440-939.0					5m extension hose for FRV 30. Connection sleeve included.	<input type="checkbox"/>
Add-on kit hose attachment	4	2.642-528.0						<input type="checkbox"/>
Add-on kit dirt trap	5	2.642-532.0						<input type="checkbox"/>
Hard surface cleaner FR 30 ME								
FR 30 ME surface cleaner	6	2.640-355.0			300 mm		Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	<input type="checkbox"/>
Hard surface cleaner FR 50								
FR 50 surface cleaner	7	2.640-679.0			500 mm		Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	<input type="checkbox"/>
Machine-specific nozzle kit for FR								
Nozzle kit for surface cleaners (type-specific) 650 - 850 l/h	8	2.639-187.0	650-850 l/h				Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (650 to 850 l/h).	<input type="checkbox"/>
Machine-specific nozzle kits for FRV								
Nozzle kit 040 for FRV 30	9	2.642-431.0		40				<input type="checkbox"/>
Hard surface cleaner FRV 30 Me								
FRV 30 ME	10	2.642-911.0						<input type="checkbox"/>
Suction hose FRV 30 me	11	4.441-040.0						<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0

KÄRCHER

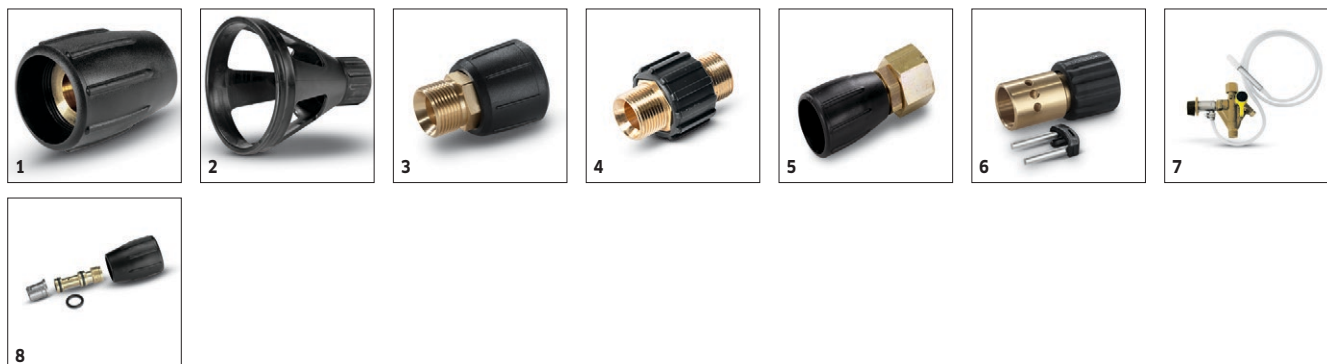

		Order No.						Price	Description	
Nozzle union										
Nozzle connector	1	5.401-210.0							For protecting and connecting Kärcher power nozzles to spray lances (M 18 x 1.5 IG).	<input type="checkbox"/>
Spacer (including nozzle union)										
Spacer (incl. nozzle union)	2	5.394-294.0							Guarantees constant safety clearance, e.g. for tyres and bodywork. Helps prevent damage to sensitive surfaces. Mounts directly to lance.	<input type="checkbox"/>
Rotary coupling										
Rotary coupling	3	4.401-091.0							Kärcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector M 22 x 1.5 m. With grip protection.	<input type="checkbox"/>
Coupling										
Coupler -2xM22x1,5	4	4.403-002.0							Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: 2x M 22 x 1.5 m.	<input type="checkbox"/>
Connector										
Nozzle connector/screw connector	5	4.402-022.0							Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 x 1.5 and 1x M 18 x 1.5.	<input type="checkbox"/>
Adapter										
Adapter M22 - Swivel	6	4.424-004.0							M22 x 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection.	<input type="checkbox"/>
HP detergent injector										
Detergent injector for high pressure	7	3.637-170.0							Cleaning agent dosage at high pressure 3 - 5 %	<input type="checkbox"/>
Machine-specific nozzle kit with order no. 3.637-170										
Machine-specific nozzle kit with order no. 3.637-170.0 750-1000 l/h	8	4.769-047.0							For HD/HDS 750 - 1000 l/h. Consists of nozzle insert + HP power nozzle + union	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0

KÄRCHER



		Order No.	Max. working pressure	Nozzle size	Diameter	Price	Description	
Nozzle kit for HKF 50 spray head (3.631-009.0 / 3.631-039.0)								
Cone for plugging into bungholes	1	4.132-002.0					Cone for plugging into bungholes	<input type="checkbox"/>
Double handle for exact control of the spray head	2	2.863-036.0					Double handle. Precise control of the spray head	<input type="checkbox"/>
Screw plug for using a spray head with one nozzle	3	5.411-061.0					Screw plug for using a spray head with one nozzle	<input type="checkbox"/>
Nozzle 070 for HKF 50	4	6.415-077.0		70			Nozzle for dual-nozzle operation	<input type="checkbox"/>
Pipe cleaning hose, ID 6								
Pipe cleaning hose	5	6.390-028.0	120 bar				20 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning hose, DN 6, 30 m	6	6.390-029.0	120 bar				30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning hose, DN 6, 20 m, 220 bar	7	6.390-030.0	250 bar				20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning nozzle								
Drain cleaning dirt blaster D 25/040	8	6.415-944.0		40	25 mm		The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	<input type="checkbox"/>
Drain cleaning dirt blaster D 30/040	9	6.415-946.0		40	30 mm			<input type="checkbox"/>
Drain cleaning dirt blaster D 35/040	10	6.415-948.0		40	35 mm			<input type="checkbox"/>
Pipe cleaning nozzle	11	5.763-015.0		55	16 mm		16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>
	12	5.763-016.0		60	16 mm			<input type="checkbox"/>
	13	5.763-017.0		50	30 mm		30 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>
Rotating pipe cleaning nozzle	14	6.415-428.0		50	16 mm		Rotating pipe cleaning nozzle with internal thread and four rotating jets for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0

KÄRCHER



		Order No.	Nozzle size				Price	Description	
HP nozzle spray angle 0°									
High-pressure nozzle spray angle 0°	1	2.884-533.0	40					High-pressure nozzle with powerful jet for extremely stubborn dirt.	<input type="checkbox"/>
Power nozzle spray angle 15°									
Power nozzle spray angle 15°	2	2.883-388.0	40					Fan jet nozzle with 15° spray angle suitable for stubborn dirt.	<input type="checkbox"/>
Power nozzle spray angle 25°									
Power nozzle spray angle 25°	3	2.883-397.0	40					Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	<input type="checkbox"/>
	4	2.884-521.0	250						<input type="checkbox"/>
Power nozzle spray angle 40°									
Power nozzle spray angle 40°	5	2.884-522.0	40					Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0

KÄRCHER



		Order No.	Nozzle size				Price	Description	
Wet blasting attachment (without nozzle)									
Wet blasting attachment with flow control (without nozzles)	1	4.762-010.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	<input type="checkbox"/>
Wet blasting attachment without flow control (nozzles not included)	2	4.762-022.0						Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	<input type="checkbox"/>
Nozzle pack for wet blasting attachment									
Nozzle kit for wet blasting attachment 035	3	2.638-526.0	35					Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022.	<input type="checkbox"/>
Boron carbide nozzle									
Boron carbide nozzle, for machines as of 1000 l/h	4	6.415-084.0	6 mm					In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0

KÄRCHER



		Order No.	Flow rate				Price	Description	
Cup foam lance									
Tank 1L	1	6.414-954.0							<input type="checkbox"/>
Cup foam lance	2	6.394-668.0	1200 l/h					Short, handy foam lance with adjustable spray angle with 1 litre detergent tank. Ideal for cleaning cars due to its compact design.	<input type="checkbox"/>
Inno Foam Set									
Inno foam kit with detergent injector	3	2.640-151.0						High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	<input type="checkbox"/>
Easy Foam Set									
Easy Foam Set with RM injector	4	2.640-691.0						HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	<input type="checkbox"/>
Nozzle kits for Inno/Easy Foam Set									
Nozzle kit 090 Inno/Easy kit 700 - 1000 l/h	5	2.640-688.0	700-1000 l/h					Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	<input type="checkbox"/>
Foam nozzle mounting kit									
Foam nozzle kit	6	2.637-926.0						Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0

KÄRCHER




		Order No.	Length				Price	Description	
Hose reel add-on kit									
Hose reel kit for petrol-driven high-pressure cleaners	1	2.637-880.0	30 m					Hose reel kit for mounting on unit. The perfect solution for safe and space-saving high-pressure hose storage.	<input type="checkbox"/>
Automatic, self-winding hose reels									
Swivel holder	2	2.639-931.0						Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	<input type="checkbox"/>
ABS wall fastening stainless steel	3	2.641-867.0						Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	<input type="checkbox"/>
Add-on kit hose reel plastics	4	6.392-975.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	<input type="checkbox"/>
Add-on kit hose reel	5	6.392-965.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	<input type="checkbox"/>
Hose reel, automatic, 20 m, painted	6	2.639-919.0	20 m					Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Hose reel, automatic, 20 m, stainless steel	7	6.391-421.0	20 m					Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
ABS hose reel stainless steel	8	2.641-866.0	20 m					High-grade, automatic steel hose reel. Especially suitable for use in the food industry. The material and finish provide for a corrosion-resistant, watertight capsuled sprong drive. Connection for HP hoses with nipple.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0

KÄRCHER

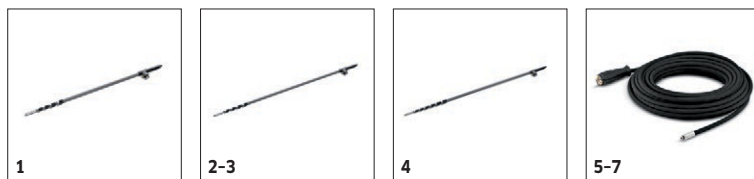

		Order No.	Flow rate	Water feed temperature	Length	Length	Price	Description	
Solar cleaning - telescopic lances									
iSolar TL 7 H (without hose)	1	4.107-054.0		60 °C				Telescopic rod made from a carbon/fibreglass mixture for maximum rigidity with minimum weight. With 7.2 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>
Telescopic rod complete 10m	2	4.107-053.0		60 °C				Telescopic rod made from a carbon/fibreglass mixture for maximum rigidity with minimum weight. With 10 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>
Telescopic rod complete 10m CFK	3	4.107-055.0		60 °C					<input type="checkbox"/>
Telescopic rod complete 14m	4	4.107-052.0		60 °C				Full carbon telescopic rod for maximum rigidity with minimal weight. With 14 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>
Hose solar	5	6.392-978.0		155 °C				High-quality, flexible HP hose (with rubber covering) for the iSolar TL 7. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	<input type="checkbox"/>
	6	6.392-977.0		155 °C				High-quality, flexible HP hose (with rubber covering) for the iSolar TL 10. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	<input type="checkbox"/>
	7	6.392-976.0		155 °C				High-quality, flexible HP hose (with rubber covering) for the iSolar TL 14. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0



		Order No.	Flow rate				Price	Description	
Push-on washing brush									
Push-on wash brush, M 18 x 1.5	1	4.762-016.0						Push-on wash brush for universal use. Simply push on to lance. Connector: M 18 x 1.6.	<input type="checkbox"/>
Rotating washing brush									
	2	4.762-559.0	900-1300 l/h						<input type="checkbox"/>
	3	4.762-562.0	900-1300 l/h						<input type="checkbox"/>

■ Included in delivery.
 ☐ Available accessories.
 ▲ Extension hose.

ACCESSORIES FOR HD 901 B

1.810-977.0

KÄRCHER



		Order No.	Length	Diameter		Price	Description	
Geka coupling								
With hose nozzle, R 1/2"	1	6.388-461.0					with hose liner	<input type="checkbox"/>
With hose nozzle, R 3/4"	2	6.388-455.0						<input type="checkbox"/>
With hose nozzle, R 1"	3	6.388-465.0						<input type="checkbox"/>
Hose coupling	4	6.388-458.0					with female thread	<input type="checkbox"/>
Suction filter								
Water filter	5	6.414-956.0						<input type="checkbox"/>
Suction filter with check valve	6	4.730-012.0					Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	<input type="checkbox"/>
Fine-mesh water filter								
Fine-mesh water filter, 100 µm, R 3/4"	7	2.637-691.0					Fine-mesh water filter, 100 µm, max. temperature 60°C. Protects the high-pressure cleaner from dirt particles contained in the water. Transparent filter cup. Water flow rate up to 1200 l/h. Connector 3/4".	<input type="checkbox"/>
Fine-mesh water filter with adapter	8	4.730-102.0					Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	<input type="checkbox"/>
Water supply hose								
Water supply hose	9	4.440-038.0	7,5 m				NW 13 R1" / R 3/4", up to 30 °C	<input type="checkbox"/>
	10	4.440-207.0	7,5 m				NW 19 R1" / R 3/4", up to 85 °C, for pick-up	<input type="checkbox"/>
Backflow check valve								
Backflow preventer	11	2.641-374.0					To prevent detergent getting into the drinking water cycle in case of inlet at low-pressure. - hot water resistant up to 80 °C - tested according to IEC 60335-2-79 - integrated leakage protection	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.