






HWE 860

Stand-alone electric flow heater



1 Individual configuration

- For low investment costs: Choose a basic unit and simply select the required features.
- Over 50 accessories for ease of use.

2 Excellent cleaning action with hot water feed

- Up to 70°C water supply temperature even in the basic model.
- A booster pump increases the temperature to up to 85 degrees.

3 Most features and accessories can easily be retrofitted at any time

- Many equipment features can be retrofitted at any time.
- Minimum installation effort.

4 Built to last and retains its value

- Four-pole low-speed electric motor
- Robust ceramic pistons.



HWE 860


- 55-litre stainless steel tank
- Electric flow heater (80°C)
- With safety thermostat and low water cut-out

Technical data

Order No.	3.070-036.0	
EAN code	4002667047462	
Current type	Ph / V / Hz	3 / 400 / 50
Fuse protection	A	50
Max. water feed temperature	°C	80
Min. water feed rate	l/h	1000
Power rating	kW	24
Operating temp. max	°C	85
Temp. while continuous operation	°C	43
Boiler cap., preheat chamber	l	19

ACCESSORIES FOR HWE 860

3.070-036.0

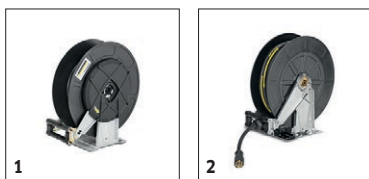

		Order No.	Length				Price	Description	
Automatic, self-winding hose reels									
Add-on kit hose reel plastics	1	6.392-975.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	<input type="checkbox"/>
Add-on kit hose reel	2	6.392-965.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	<input type="checkbox"/>

Available accessories.