



HD 9/21 G

Self-sufficient in its use and completely mobile: Thanks to a built-in Honda petrol engine, you can use the HD 9/21 G from the HD Gasoline Advanced range independently of the power supply.



1 Maximum independence

- Fitted with a reliable Honda or Yanmar motor for use without an external power supply.
- Can suck up water – e.g. from lakes or ponds – and use it for cleaning.

2 Optimum ease of use

- The ergonomic frame concept makes transport on uneven ground easier.
- Storage options for all accessory parts directly on the machine.



3 Highly versatile

- Optional cage frame with eyelets for crane loading and reliable protection of the machines.
- Hose reel attachment kit for shorter set-up available as an optional extra.



4 For the toughest jobs

- Robust basic frame for daily use in tough conditions.
- Large water filter to protect the pump.



HD 9/21 G

- Robust, powder-coated tubular frame
- Variable water pressure and water flow regulation
- Puncture proof wheels for maximum mobility

Technical data

Order Number	1.187-905.0	
EAN code	4054278210568	
Operating pressure	bar / MPa	10-210 / 1-21
Flow rate	l/h	200-850
Max. water feed temperature	°C	max. 60
Engine type	GX 340/Petrol	
Power rating	kW / hp	8 / 11
Weight	kg	68
Dimensions (L x W x H)	mm	870 × 725 × 1170

Equipment

Trigger gun	EASY!Force Advanced	
High-pressure hose	m	15 / ID 8, 315 bar
Spray lance	mm	1050
Anti-twist system (AVS)	-	
Infinitely variable pressure and water flow control on the unit	■	
Electric starter	-	
Servo Control	-	

■ Included in delivery.

ACCESSORIES FOR HD 9/21 G

1.187-905.0

KÄRCHER



		Order Number	ID	Max. working pressure	Length	Price	Description	
Standard with unions on both sides								
High-pressure hose, 10 m DN 8, AVS trigger gun connector	1	6.110-031.0	ID 8	315 bar	10 m		10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	▲
High-pressure hose, 20 m DN 8, AVS trigger gun connector	2	6.110-032.0	ID 8	315 bar	20 m		20 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	▲
High-pressure hose, 30 m DN 8, including rotary coupling	3	6.110-014.0	ID 8	315 bar	30 m		With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose, 15 m DN 10, 220 bar, extension	4	6.110-042.0	ID 10	220 bar	15 m		15 m high-pressure hose M 22 x 1.5) with kink protection and threaded couplings at both ends. Further data: DN 10/155°C/220 bar.	▲
High-pressure hose, 20 m DN 10, 220 bar, extension	5	6.110-043.0	ID 10	220 bar	20 m		with union on both sides, M 22 x 1.5 with anti-kink protection. NW 10/155°C/220 bar	▲
High-pressure hose, 25 m DN 10, extension, not rotatable	6	6.110-044.0	ID 10	220 bar	25 m			▲
Hose assembly premium DN12 21MPa 15m	7	6.110-059.0	ID 12	210 bar	15 m		High-pressure hose for water volumes greater than 1,800 l/h. With union on both sides. 2x M 22 x 1.5 with anti-kink protection.	▲
Hose assembly premium DN12 21MPa 40m	8	6.110-060.0	ID 12	210 bar	40 m			▲
High-pressure hose, 15 m DN 8, AVS trigger gun connector	9	6.110-030.0	ID 8	315 bar	15 m		15 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	■
Longlife 400 with unions on both sides								
High-pressure hose Longlife 400, 30 m DN 8, including rotary coupling	10	6.110-023.0	ID 8	400 bar	30 m		With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, 20 m, DN 8, extension	11	6.110-027.0	ID 8	400 bar	20 m		with rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose Longlife 400, 15 m, DN 8, including rotary coupling	12	6.110-029.0	ID 8	400 bar	15 m		With rotary coupling, 2 x M 22 x 1.5	▲
High-pressure hose 1.5 m, DN 8, including connectors	13	6.110-024.0	ID 8	400 bar	1.5 m		1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).	□
	14	6.110-069.0	ID 8	400 bar	1.5 m			□
High-pressure hose packaged	15	6.110-038.0	ID 8	400 bar	10 m			□
Longlife food industry version with unions on both sides								
High pressure hose food DN 8 / 10 m	16	6.110-053.0	ID 8	400 bar	10 m		Longlife HP hose for use in the food industry. Außendecke## animal-grease-resistant, non-colour-bleeding material. With rotary coupling, 2 x M 22 x 1.5	▲

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 9/21 G 1.187-905.0



		Order Number	Flow rate				Price	Description	
Trigger guns									
Extended easy press trigger gun	1	4.118-005.0						Extended easy press high-pressure trigger gun for high-pressure hoses with rotating connector.	■
Quick connect									
Quick-fitting pipe union coupler trapezo	2	2.115-000.0							□
Quick-fitting pipe union plug nipple tra	3	2.115-001.0							□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 9/21 G 1.187-905.0



1-4

		Order Number	Nozzle size				Price	Description	
Power nozzle spray angle 25°									
	1	2.113-010.0	48						■
Nozzle chemical TR for replacement 25250	2	2.113-020.0	250						■
HP nozzle spray angle 0°									
High-pressure nozzle spray angle 0°	3	2.113-034.0	50					High-pressure nozzle with powerful jet for extremely stubborn dirt.	□
Power nozzle spray angle 40°									
Power nozzle spray angle 40°	4	2.113-054.0	50					Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 9/21 G 1.187-905.0



		Order Number					Price	Description	
Y distributor									
Y distributor	1	4.111-024.0							<input type="checkbox"/>
Cage frame attachment kit									
Add-on kit frame Cage breit	2	2.637-007.0							<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 9/21 G 1.187-905.0

KÄRCHER




		Order Number	Flow rate	Nozzle size	Diameter	Price	Description	
Hard Surface Cleaner FRV 30								
Add-on kit rubber lip	1	2.642-910.0					For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.	<input type="checkbox"/>
Extension hose 5 m	2	4.440-939.0					5m extension hose for FRV 30. Connection sleeve included.	<input type="checkbox"/>
Add-on kit hose attachment	3	2.642-528.0						<input type="checkbox"/>
Add-on kit dirt trap	4	2.642-532.0						<input type="checkbox"/>
FRV 30	5	2.111-010.0						<input type="checkbox"/>
Hard surface cleaner FR 30 ME								
FR 30 ME surface cleaner	6	2.111-013.0			300 mm		Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	<input type="checkbox"/>
Hard Surface Cleaner FR 50								
FR 50 surface cleaner	7	2.111-023.0			500 mm		Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	<input type="checkbox"/>
Machine-specific nozzle kit for FR								
Nozzle kit for surface cleaners (type-specific) 850 - 1100 l/h	8	2.640-442.0	850-1100 l/h				Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (850 to 1100 l/h).	<input type="checkbox"/>
Machine-specific nozzle kits for FRV								
Nozzle kit 050 for FRV 30	9	2.642-433.0		50				<input type="checkbox"/>
Hard surface cleaner FRV 30 Me								
Suction hose FRV 30 me	10	4.441-040.0						<input type="checkbox"/>
FRV 30 ME	11	2.111-012.0						<input type="checkbox"/>
Surface Cleaner FR 50 Me								
	12	2.111-024.0						<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 9/21 G 1.187-905.0

KÄRCHER

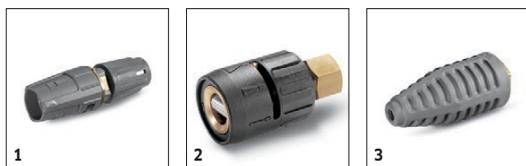

		Order Number	Max. working pressure	Nozzle size			Price	Description	
Triple nozzles									
Triple nozzle 050	1	4.117-037.0	300 bar	50				Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For high-pressure cleaners with injector; low-pressure fan jet for detergent removal and application. Connector M 18x1.5.	<input type="checkbox"/>
Angle vario nozzle 0°-90°									
Spezial nozzle 0005	2	4.113-007.0		50				Variable angle nozzle for spray angle adjustment from 0° to 90°. For easy adjustment to all kinds of soiling and surfaces.	<input type="checkbox"/>
Dirt blaster, large									
Dirt blaster - without changeover function	3	4.114-027.0	300 bar	50				The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 9/21 G 1.187-905.0

KÄRCHER



		Order Number	Nozzle size					Price	Description	
Wet blasting attachment (without nozzle)										
Wet blasting attachment with flow control (without nozzles)	1	4.115-000.0							Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	<input type="checkbox"/>
Wet blasting attachment without flow control (nozzles not included)	2	4.115-006.0							Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	<input type="checkbox"/>
Nozzle pack for wet blasting attachment										
Nozzle pack TR wet jet set 0050	3	2.112-023.0	50							<input type="checkbox"/>
Boron carbide nozzle										
Boron carbide nozzle, for machines as of 1000 l/h	4	6.415-084.0	6 mm						In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 9/21 G 1.187-905.0

KÄRCHER



		Order Number	Max. working pressure	Nozzle size	Diameter		Price	Description	
Pipe cleaning hose, ID 6									
Hose assembly TR pipe cleaning DN6 max.2	1	6.110-046.0	250 bar						<input type="checkbox"/>
Pipe cleaning hose, DN 6, 20 m, 220 bar	2	6.110-008.0	250 bar					20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Hose assembly TR pipe cleaning DN6 max.2	3	6.110-047.0	250 bar						<input type="checkbox"/>
Hose assembly TR pipe cleaning DN6 14MPa	4	6.110-048.0	140 bar						<input type="checkbox"/>
Pipe cleaning hose	5	6.110-049.0	140 bar					20 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning hose, DN 6, 30 m	6	6.110-050.0	140 bar					30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	<input type="checkbox"/>
Pipe cleaning nozzle									
Drain cleaning dirt blaster D 25/060	7	6.415-945.0		60	25 mm			The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the necessary forward movement, as well as convenient handling.	<input type="checkbox"/>
Drain cleaning dirt blaster D 30/060	8	6.415-947.0		60	30 mm				<input type="checkbox"/>
Drain cleaning dirt blaster D 35/060	9	6.415-949.0		60	35 mm				<input type="checkbox"/>
Pipe cleaning nozzle	10	5.763-015.0		55	16 mm			16 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>
	11	5.763-016.0		60	16 mm				<input type="checkbox"/>
	12	5.763-017.0		50	30 mm				30 mm pipe cleaning nozzle with internal thread. Various jet directions for environmentally-friendly cleaning of blocked drains and pipes.
Rotating pipe cleaning nozzle	13	6.415-428.0		50	16 mm			Rotating pipe cleaning nozzle with internal thread and four rotating jets for environmentally-friendly cleaning of blocked drains and pipes.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 9/21 G 1.187-905.0



		Order Number	Flow rate				Price	Description	
Cup foam lance									
Packing complete for 6.394-969.0	1	2.112-018.0							<input type="checkbox"/>
Tank 1L	2	6.414-954.0							<input type="checkbox"/>
Inno Foam Set									
Inno foam kit with detergent injector	3	2.112-000.0						High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	<input type="checkbox"/>
Easy Foam Set									
Easy Foam Set with RM injector	4	2.112-010.0						HP foam system for use with HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	<input type="checkbox"/>
Nozzle kits for Inno/Easy Foam Set									
Nozzle kit 090 Inno/Easy kit 700 - 1000 l/h	5	2.111-019.0	700-1000 l/h					Nozzle kit contains Kärcher power nozzles and nozzle inserts. For Inno/Easy-Foam set 700-1000 l/h. For optimal foam system performance.	<input type="checkbox"/>
Foam nozzle mounting kit									
Foam nozzle kit	6	2.112-013.0						Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 9/21 G 1.187-905.0

KÄRCHER




		Order Number	Length					Price	Description	
Hose reel add-on kit										
Add-on kit hose reel	1	2.110-004.0	30 m							<input type="checkbox"/>
Automatic, self-winding hose reels										
Add-on kit hose reel plastics	2	6.392-074.0	20 m						Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	<input type="checkbox"/>
Add-on kit hose reel	3	6.392-083.0	20 m						Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	<input type="checkbox"/>
Hose reel, automatic, 20 m, painted	4	6.392-106.0	20 m						Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
	5	6.392-105.0	20 m							<input type="checkbox"/>
Hose reel, automatic, 20 m, stainless steel	6	6.392-076.0	20 m						Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
ABS hose reel stainless steel	7	6.392-122.0	20 m						High-grade, automatic steel hose reel. Especially suitable for use in the food industry. The material and finish provide for a corrosion-resistant, watertight capsuled sprong drive. Connection for HP hoses with nipple.	<input type="checkbox"/>
Swivel holder	8	2.639-931.0							Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	<input type="checkbox"/>
ABS wall fastening stainless steel	9	2.641-867.0							Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 9/21 G

1.187-905.0

KÄRCHER

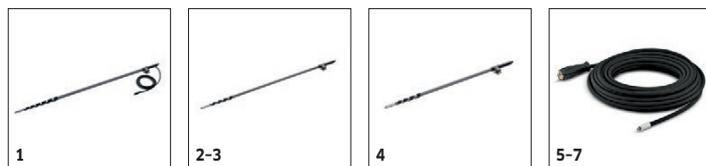

		Order Number	Flow rate	Water feed temperature	Length	Length	Price	Description	
Solar cleaning - telescopic lances									
Telescopic rod complete 14m	1	4.110-002.0		max. 60 °C				Full carbon telescopic rod for maximum rigidity with minimal weight. With 14 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>
Telescopic rod complete 10m CFK	2	4.110-007.0		max. 60 °C					<input type="checkbox"/>
Telescopic rod complete 10m	3	4.110-003.0		max. 60 °C				Telescopic rod made from a carbon/fibreglass mixture for maximum rigidity with minimum weight. With 10 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>
iSolar TL 7 H (without hose)	4	4.110-004.0		max. 60 °C				Telescopic rod made from a carbon/fibreglass mixture for maximum rigidity with minimum weight. With 7.2 m max. reach and practical quick-release couplings for easy extension and retraction.	<input type="checkbox"/>
Hose solar	5	6.392-978.0		max. 155 °C				High-quality, flexible HP hose (with rubber covering) for the iSolar TL 7. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	<input type="checkbox"/>
	6	6.392-977.0		max. 155 °C				High-quality, flexible HP hose (with rubber covering) for the iSolar TL 10. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	<input type="checkbox"/>
	7	6.392-976.0		max. 155 °C				High-quality, flexible HP hose (with rubber covering) for the iSolar TL 14. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 9/21 G 1.187-905.0



		Order Number	Flow rate				Price	Description	
Push-on washing brush									
Push-on wash brush, M 18 x 1.5	1	4.113-001.0						Push-on wash brush for universal use. Simply push on to lance. Connector: M 18 x 1.6.	<input type="checkbox"/>
Rotating washing brush									
	2	4.113-002.0	800-1300 l/h						<input type="checkbox"/>
	3	4.113-005.0	800-1300 l/h						<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

ACCESSORIES FOR HD 9/21 G 1.187-905.0

KÄRCHER



		Order Number	Length	Diameter		Price	Description	
Geka coupling								
With hose nozzle, R 3/4"	1	6.388-455.0					with hose liner	<input type="checkbox"/>
Hose coupling	2	6.388-458.0					with female thread	<input type="checkbox"/>
Suction filter								
Water filter	3	6.414-956.0						<input type="checkbox"/>
Suction filter with check valve	4	4.730-012.0					Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	<input type="checkbox"/>
Fine-mesh water filter								
Fine-mesh water filter with adapter	5	4.730-102.0					Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	<input type="checkbox"/>
Water supply hose								
Water supply hose	6	4.440-038.0	7,5 m				NW 13 R1" / R 3/4", up to 30 °C	<input type="checkbox"/>
Backflow check valve								
Backflow preventer	7	2.641-374.0					To prevent detergent getting into the drinking water cycle in case of inlet at low-pressure. - hot water resistant up to 80 °C - tested according to IEC 60335-2-79 - integrated leakage protection	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.