




## CAN-380 PINT DEHUMIDIFIER




### CAN-380 SPECS:

Capacity 80°F, RH 60%, - 380 pints/24hr  
Air Flow - 1648 CFM  
Power Supply 208-240VAC, 1 phase, 60hz  
Rated input current - 16A  
Working temperature - 60°F-100°F  
Overall size - 43.3x35.4x27.6  
Packaging size - 46.9x33.9x39  
Net weight - 278 lbs  
Gross weight - 330 lbs  
Air inlet flange - 11.8x15.8  
Energy factor - 5.1pints/kwh  
Applying space - 2000-3500 sq ft  
Sound level - 65dB  
Air inlet/outlet plastic round flange optional  
Thermal expansion valve  
Refrigerant: R410a  
Humidistat with external on/off control  
Ventilation mode external control  
Dry contact for 3rd party controls

### DIMENSIONS

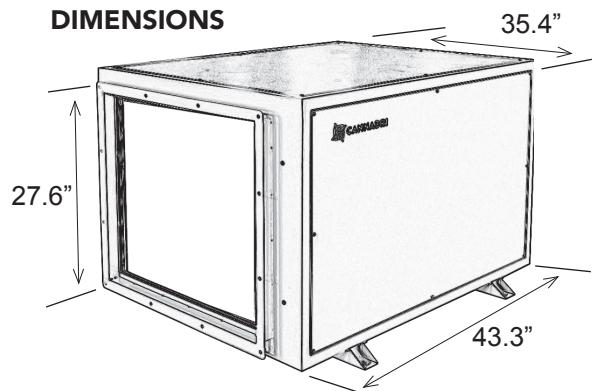


HUMIDISTAT

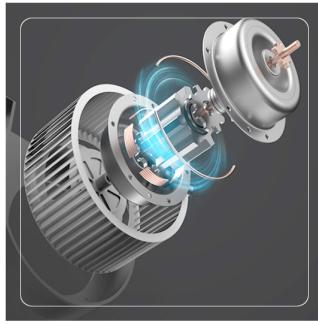

CENTRIFUGAL FAN



ROTARY COMPRESSOR

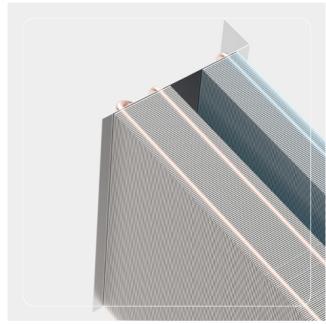

HEAT EXCHANGER