


**Voltage Range:** 12V or 24V

**Warranty:** 3 years

- Warm white light output (3000K)
- Surface mounted
- Interior or exterior use – IP67 ingress protection
- Durable aluminium housing
- Clear silicon lens
- Low-profile depth of only 24mm

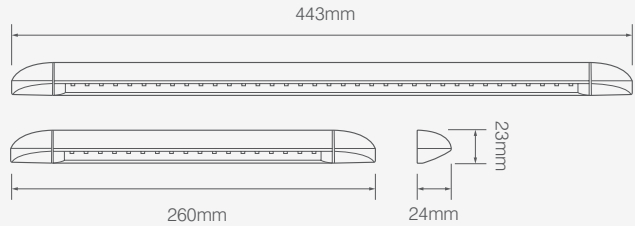

Cable Length: 200mm

## SILVER AWNING / SCENE LAMP

**23260** 12V

**23260-24** 24V



Overall size: 260mm x 23mm x 24mm Lumens: 240lm (effective), 320lm (raw) Lux value @ 1m (12V / 24V): 80lx / 73lx  
Current Draw (13.8V / 28V): 0.38A / 0.14A LED Qty: 18

**23450** 12V

**23450-24** 24V



Overall size: 443mm x 23mm x 24mm Lumens: 500lm (effective), 650lm (raw) Lux value @ 1m (12V / 24V): 165lx / 160lx  
Current Draw (13.8V / 28V): 0.74A / 0.27A LED Qty: 36

## BLACK AWNING / SCENE LAMP

**23260BLK** 12V

**23260BLK-24** 24V



Overall size: 260mm x 23mm x 24mm Lumens: 185lm (effective), 320lm (raw) Lux value @ 1m (12V / 24V): 80lx / 73lx  
Current Draw (13.8V / 28V): 0.38A / 0.16A LED Qty: 18

**23450BLK** 12V

**23450BLK-24** 24V



Overall size: 443mm x 23mm x 24mm Lumens: 385lm (effective), 650lm (raw) Lux value @ 1m (12V / 24V): 165lx / 160lx  
Current Draw (13.8V / 28V): 0.74A / 0.32A LED Qty: 36

### Low Profile

Protrudes only 24mm from the vehicle body

Exterior grade – IP67



Potted silicon lens

60° light spread